

Photometric Report

MAR-90356990 Exterior Linear 310 QUAD Graze Narrow – Only Blue

MARTIN PROFESSIONAL R&D OPTICAL LABORATORY


GENERAL SPECIFICATIONS

Total Fixture Output:	706 lm
Light Engine Output:	1067 lm
Efficacy:	34 lm/W
Lens Option:	Narrow
Beam Angle (50%):	15 °
Field Angle (10%):	27 °
Cut-off Angle (3%):	36 °
CRI:	73+
Color Temperature:	Variable



SAMPLE MEASUREMENT

POLAR PLOT

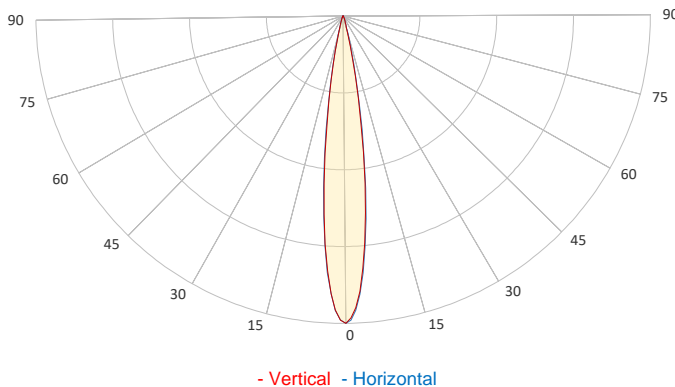


Catalog Number:	MAR-90356990
Measured Output:	102 lm
Measured Peak:	1119 cd
Consumed Power:	15.0 W
Efficacy:	7.1 lm/W

Beam Angle (50%):	15.2 °
Field Angle (10%):	26.8 °
Cut-off Angle (3%):	36.2 °

Measurement Condition:	
Ambient Temperature:	25 ° +/- 5 ° C
AC Supply:	230V/50Hz
Fan Mode:	No Fan
Fixture Warm-up Time:	60 minutes


SPECTRAL DISTRIBUTION

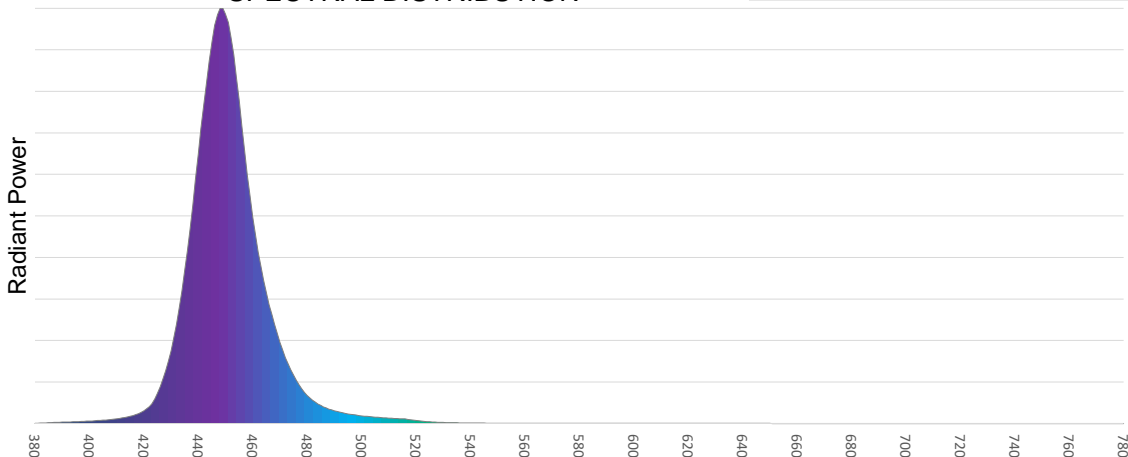

Photometric Report

MAR-90356990 Exterior Linear 310 QUAD Graze Narrow – Only Blue


BEAM DETAILS

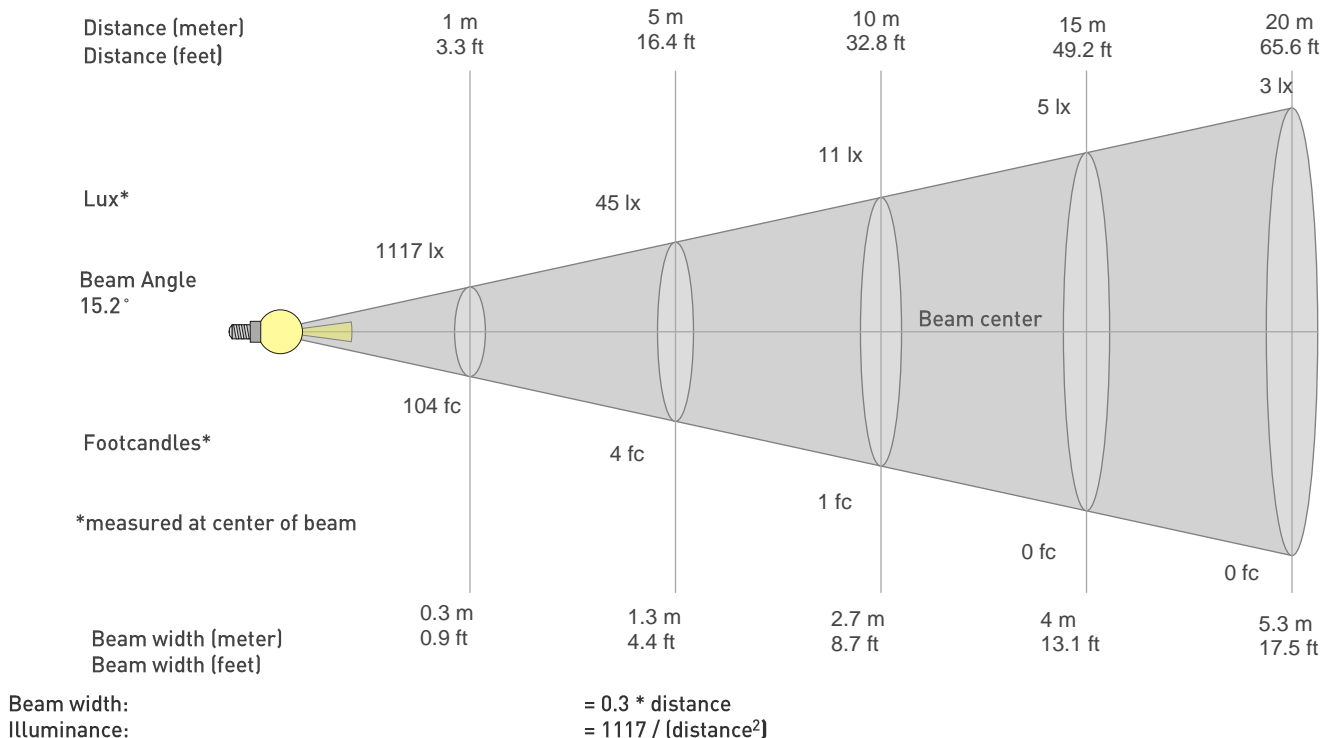

distance in [m] for illuminance in [lux] distance in [ft] for illuminance in [fc]

BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1117lx	279lx	124lx	70lx	45lx	31lx	23lx	17lx	14lx	11lx	9lx	8lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx
103.8fc	25.9fc	11.5fc	6.5fc	4.2fc	2.9fc	2.1fc	1.6fc	1.3fc	1fc	0.9fc	0.7fc	0.6fc	0.5fc	0.5fc	0.4fc	0.4fc	0.3fc	0.3fc	0.3fc

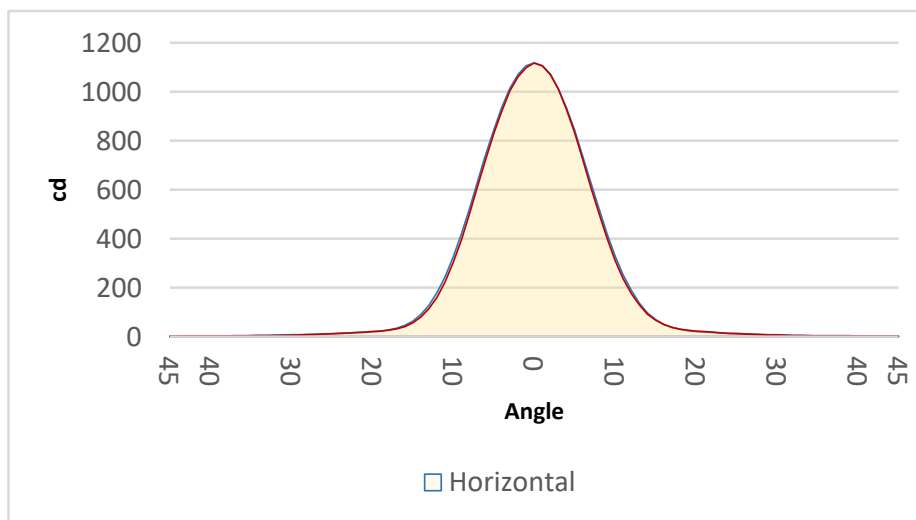

BEAM ANGLE 50%	FIELD ANGLE 10%	CUTOFF ANGLE 3%
15.2°	26.8°	36.2°