

Photometric Report

MAC Viper XIP Spectral Enhancement Filter – Wide

MARTIN PROFESSIONAL R&D OPTICAL LABORATORY


GENERAL SPECIFICATIONS

Total Fixture Output:	18700 lm
Light Engine Output:	56000 lm
Efficacy:	29,5 lm/W
Lens Option:	N/A
Beam Angle (50%):	5,1 - 51,9°
Field Angle (10%):	5,7 - 53,6°
Cut-off Angle (3%):	5,9 - 53,9°
CRI:	90 (+/- 3)
CQS:	83 (+/- 3)
TM-30 Rf:	78 (+/- 3)
TM-30 Rg:	107 (+/- 3)
TLCI:	68 (+/- 3)
Color Temperature:	5800 K (+/- 250 K)



SAMPLE MEASUREMENT

POLAR PLOT

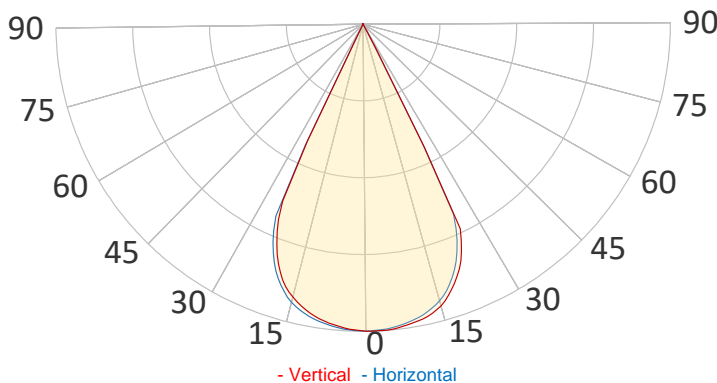


Catalog Number:	MAR-90250300HU
Measured Output:	18880 lm
Measured Peak:	33761 cd
Consumed Power:	900 W
Efficacy:	21,0 lm/W

Beam Angle (50%):	51,7°
Field Angle (10%):	53,5°
Cut-off Angle (3%):	53,9°

Measurement Condition:	
Ambient Temperature:	25° +/- 5° C
AC Supply:	230V/50Hz
Fan Mode:	Constant Fan Full
Fixture Warm-up Time:	30 minutes



SPECTRAL DISTRIBUTION

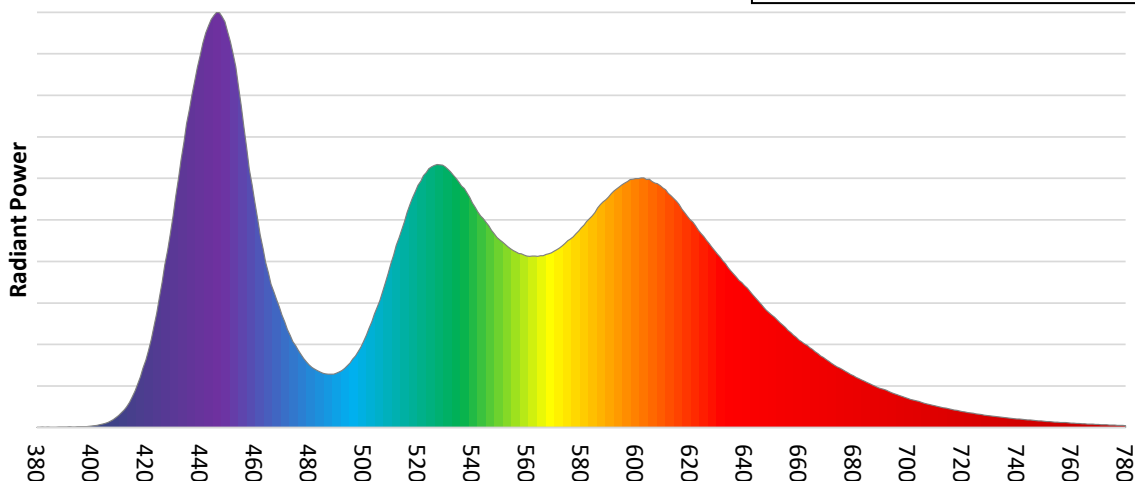


Photometric Report

MAC Viper XIP Spectral Enhancement Filter – Wide


CHROMATICITY

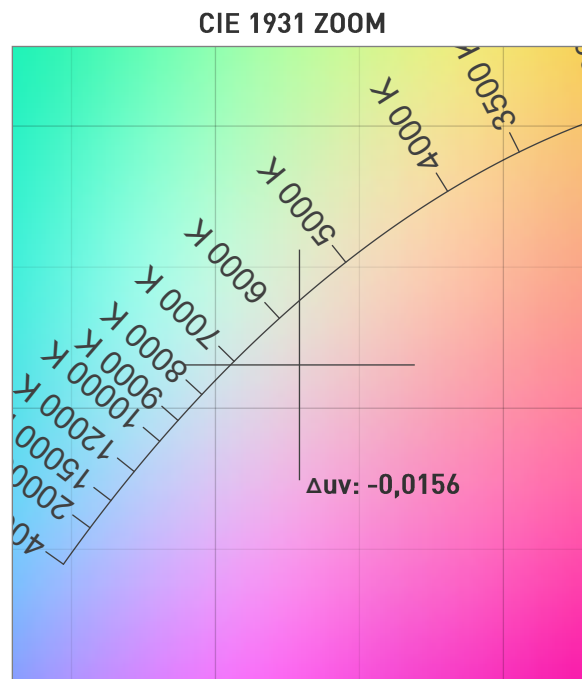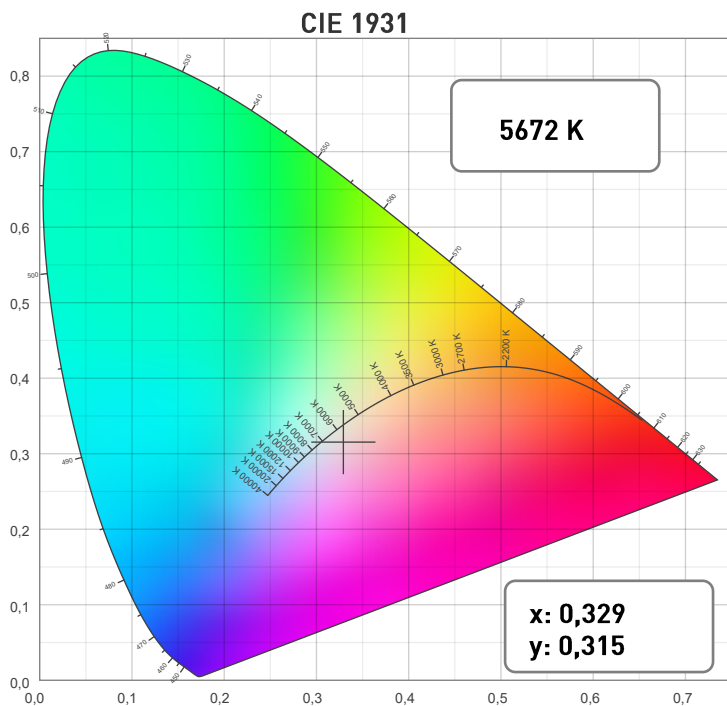

TM30: 80,5

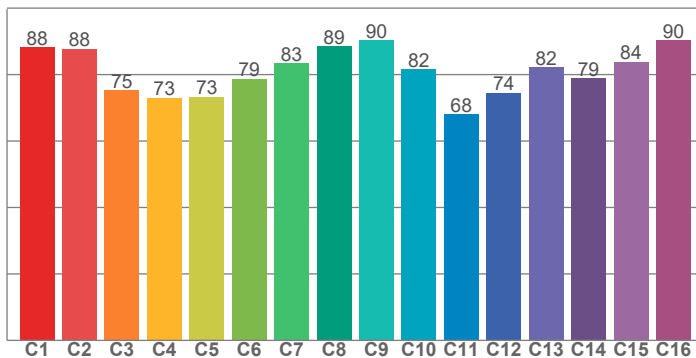


CRI: 87,1 (R1-R8)

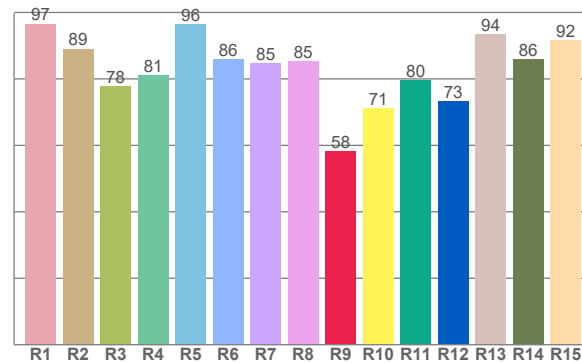

COLOR PARAMETERS

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
5672 K	87,1	58,3	80,5	107,6

CQS: 82,3

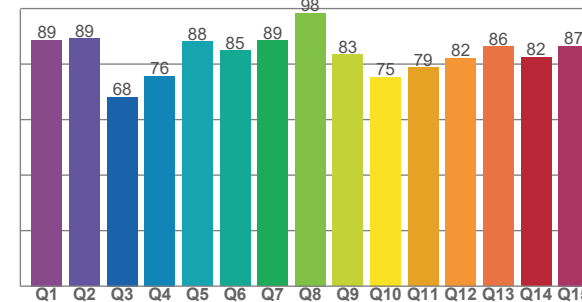

Television Lighting Consistency Index	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate CIE 1964	Color Coordinate CIE 1964	Color Deviation from Black Body
TLCI	CQS	x	y	u	v	Δuv
68	82,3	0,329	0,315	0,215	0,309	-0,0156

Photometric Report

MAC Viper XIP Spectral Enhancement Filter – Wide

TM30



Rf 80,5

Fidelity index Rf



Rg 107,6

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	88	-6%	-2%
2	88	-3%	6%
3	75	0%	14%
4	73	6%	16%
5	73	12%	13%
6	79	15%	5%
7	83	11%	-4%
8	89	2%	-6%
9	90	-6%	-3%
10	82	-7%	8%
11	68	-3%	20%
12	74	4%	17%
13	82	11%	11%
14	79	11%	6%
15	84	12%	-8%
16	90	3%	-5%

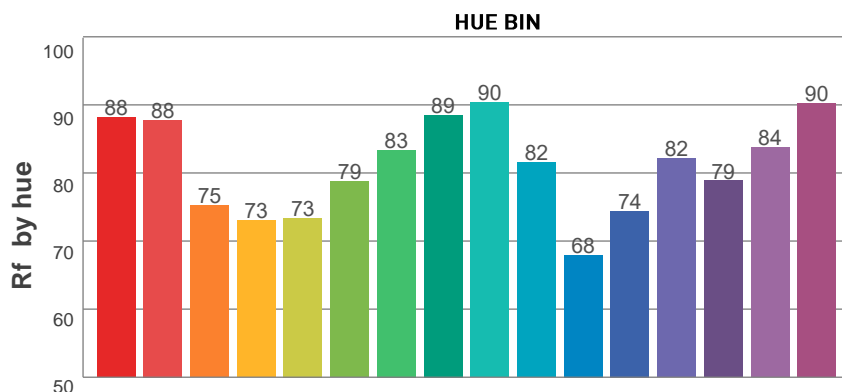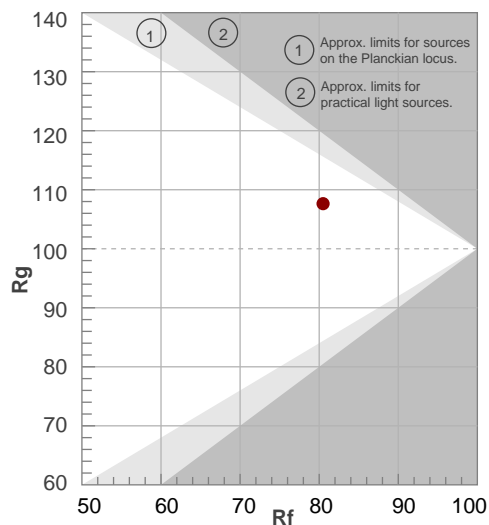

COLOR VECTOR GRAPHICS

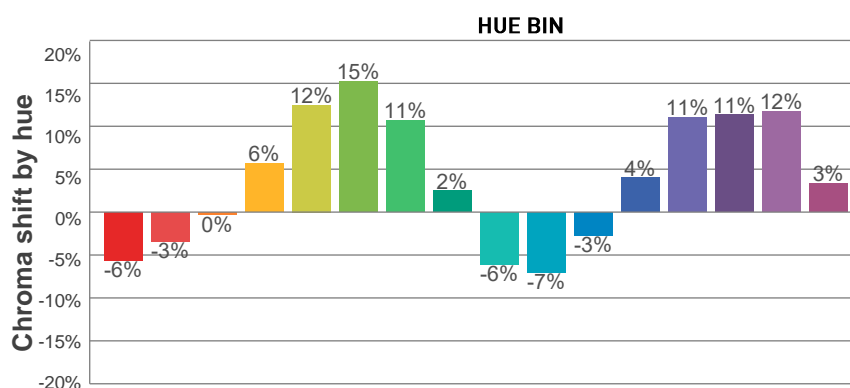


COLOR DISTORTION GRAPHICS

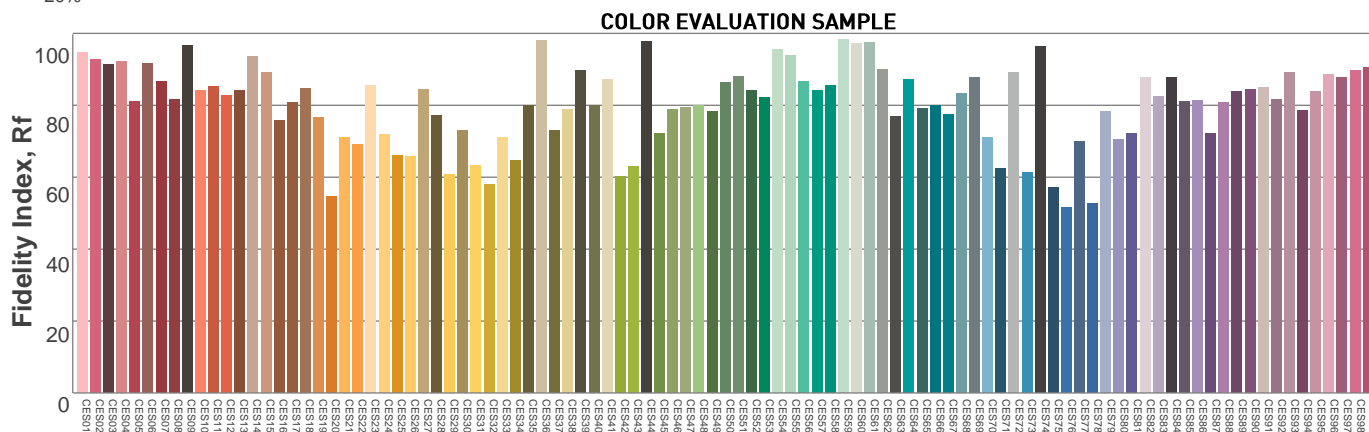

Photometric Report

MAC Viper XIP Spectral Enhancement Filter – Wide

BEAM DETAILS

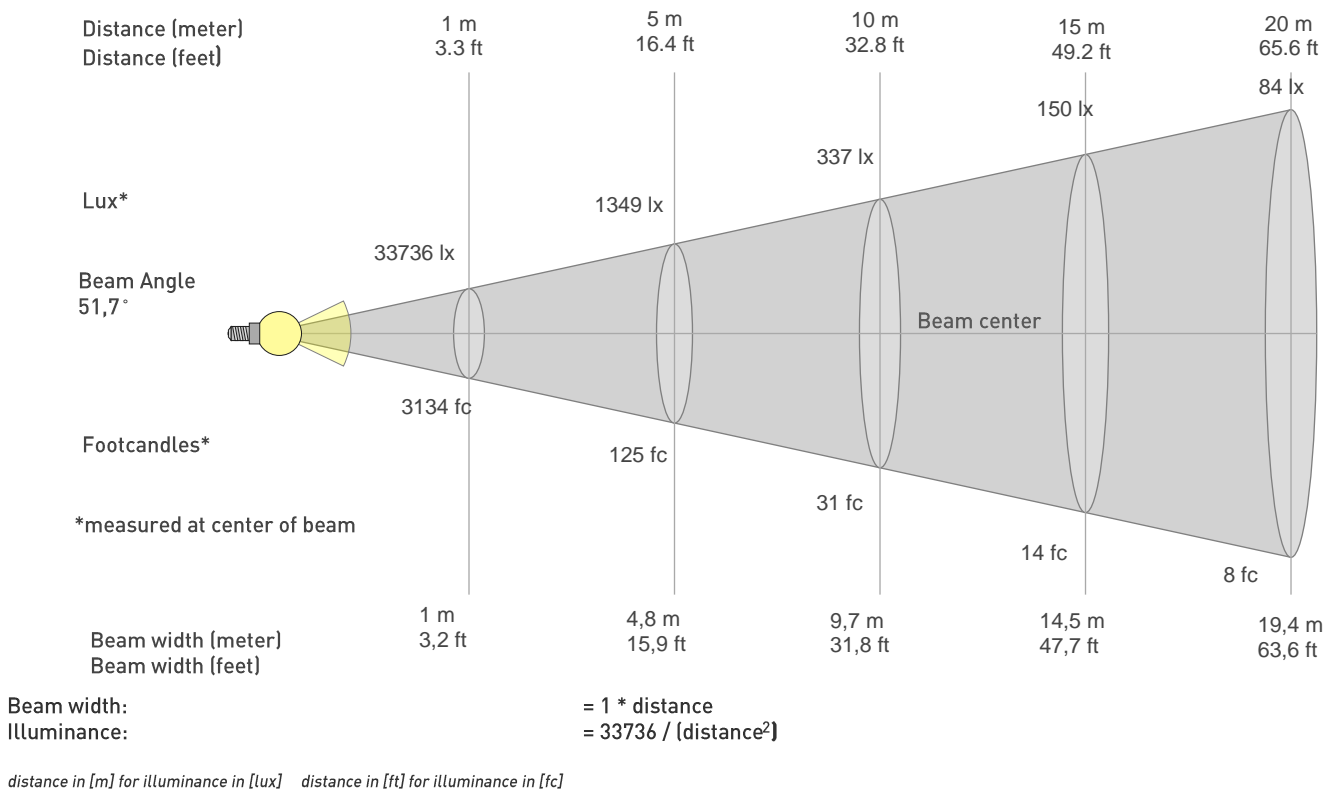

BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
33736lx	8434lx	3748lx	2108lx	1349lx	937lx	688lx	527lx	416lx	337lx	279lx	234lx	200lx	172lx	150lx	132lx	117lx	104lx	93lx	84lx
3134,2fc	783,5fc	348,2fc	195,9fc	125,4fc	87,1fc	64fc	49fc	38,7fc	31,3fc	25,9fc	21,8fc	18,5fc	16fc	13,9fc	12,2fc	10,8fc	9,7fc	8,7fc	7,8fc

