

# EXTERIOR DOT-HP

FULLY WEATHERIZED DIRECT-VIEW HIGH INTENSITY LED DOT

SPEC SHEET



## HIGHLIGHTS

- Creative LED Video element for building and stage integration
- Customizable pixel-pitch
- Bright and fully calibrated for optimal consistency

## OVERVIEW

Exterior Dot-HP is a bright, outdoor-rated dot designed to create media facades or perimeter lighting on large buildings and structures for long-distance viewing. This high-performance exterior LED dot for large venues allows for long fixture runs with variable pixel pitches for flexible designs. A creative tool for lighting designers, the Exterior Dot-HP is available in two versions – RGB color mixing or cool white – with a number of front designs for a variety of unique looks. It is driven by the Martin P3 System Controller family for easy setup and video display. The Exterior Dot-HP is also compatible with RDM/DMX for smaller setups.

## KEY MESSAGES

### VARIETY OF MODELS FOR DIFFERENT LOOKS AND APPLICATIONS

The Exterior Dot-HP is available with two different LED configurations, full RGB color control or as a cool white version. There are two different fronts available for direct-view applications, the flat clear front or a dome diffuser. Further the Exterior Dot-HP is available with a lens array for directional lighting applications.

### FLEXIBLE MOUNTING OPTIONS

The Exterior Dot-HP is an independent dot, which can be connected in high quantities over long distances for large scale projects. The dot can be directly mounted onto a surface and two different mounting brackets are available for further installation options.

### EASY INFRASTRUCTURE

The Exterior Dot-HP can be controlled via the Martin P3 protocol for easy mapping and integration with other Martin LED Video products onto the same control system. For small or pure lighting applications, the Exterior Dot-HP also accepts RDM/DMX, enabling even more versatile use.

# EXTERIOR DOT-HP

FULLY WEATHERIZED DIRECT-VIEW HIGH INTENSITY LED DOT

SPEC SHEET

## FEATURES

- Up to 120 lm (RGB) and 210 lm (CW)
- Available in clear front, diffuser dome and directional lens variants
- RGB or cool white LED engine
- Flexible mounting system allows for customized solutions
- Local integral in-built diagnostics tool
- High-quality 16-bit per color image processing technology
- Pixel-level brightness and color calibration for optimal image quality
- P3/RDM/DMX controllable (automatic protocol detection)
- Intuitive mapping and addressing via P3 System Controller
- Combined power/data input over single cable
- Supported by integrated power and data processor (P3 PowerPort 1500 or P3 PowerPort 1000 IP) and simple cabling system

## ORDERING INFORMATION

- Exterior Dot-HP RGB, Aluminum, Clear Front ..... P/N 90357683
  - Exterior Dot-HP RGB, Aluminum, Dome Front ..... P/N 90357685
  - Exterior Dot-HP RGB, Aluminum, Directional Front (TIR lens) ..... P/N 90357686
  - Exterior Dot-HP CW, Aluminum, Clear Front ..... P/N 90357688
  - Exterior Dot-HP CW, Aluminum, Dome Front ..... P/N 90357687
  - Exterior Dot-HP CW, Aluminum, Directional Front (TIR lens) ..... P/N 90357689
- \*Dots in the Exterior Dot-HP range are supplied in cardboard boxes containing multiples of 9 dots. Remaining dots (and orders that consist of less than 9 dots total) are supplied in individual packs.*

### RELATED ITEMS

- Martin P3™ PowerPort 1500 ..... P/N 90721040
- Martin P3™ PowerPort 1000 IP Installation..... P/N 90721080
- Martin™ IP66 PSU 240 W PSU..... P/N 90760330
- Martin P3-050™ System Controller ..... P/N 90721090
- Martin P3-150™ System Controller ..... P/N 90721015
- Martin P3-300™ System Controller ..... P/N 90721060
- Martin P3-PC™ System Controller..... P/N 90721030



# EXTERIOR DOT-HP

FULLY WEATHERIZED DIRECT-VIEW HIGH INTENSITY LED DOT

SPEC SHEET

## ACCESSORIES

- Magnetic Test Tool, set of 10 ..... P/N 91610139

### MOUNTING HARDWARE

- Bracket with flanges (set of 9), Exterior Dot-HP ..... P/N 91606020
- Mounting Profile Kit incl. dot bracket, screws and lock, Exterior Dot-HP, 57 mm (2.25 in.) ..... P/N 91606021
- Mounting Profile, Exterior Dot-HP / Pixline, 320 mm (12.6 in.) ..... P/N 91611620
- Mounting Profile, Exterior Dot-HP / Pixline, 1280 mm (50.4 in.) ..... P/N 91611610
- Mounting Profile Locks, Exterior Dot-HP / Pixline, set of 10 ..... P/N 91611725

### INPUT ADAPTER CABLES

- Power + Data Input Adapter, 4-pin male XLR (for P3 PowerPort 1500) to female BBD, 0.25 m (0.9 ft.) ..... P/N 91616046
- Power + Data Input Adapter, 5-pin male XLR + wire tails (for PSU) to female BBD, 0.25 m (0.9 ft.) ..... P/N 91616048
- Power + Data Input Adapter, 5-pin male XLR + male Martin™ IP66 PSU to fem. BBD, 0.25 m (0.9 ft.) ..... P/N 91616050
- Power + Data Input Adapter, 5-pin male XLR + 4-pin male XLR to female BBD, 0.25 m (0.9 ft.) ..... P/N 91616049

### OUTPUT ADAPTER CABLES

- Power + Data Output Adapter male BBD to 4-pin female XLR, 0.25 m (0.9 ft.) ..... P/N 91616047
- DMX Output Adapter, male BBD to 5-pin female XLR, 0.25 m (0.9 ft.) ..... P/N 91616051

### EXTENSION CABLES, CMX TYPE


- Power + Data Extension Cable, Installation type CMX, BBD-BBD 1 m (3.3 ft.) ..... P/N 91616055
- Power + Data Extension Cable, Installation type CMX, BBD-BBD, 2.5 m (8.2 ft.) ..... P/N 91616056
- Power + Data Extension Cable, Installation type CMX, BBD-BBD, 5 m (16.4 ft.) ..... P/N 91616057
- Power + Data Extension Cable, Installation type CMX, BBD-BBD, 10 m (32.9 ft.) ..... P/N 91616058
- Power + Data Extension Cable, Installation type CMX, BBD-BBD, 25 m (82.1 ft.) ..... P/N 91616059
- Power + Data Extension Cable, Installation type CMX, without connectors, 100 m (328.1 ft.) ..... P/N 91616060

### EXTENSION CABLES, LOW SMOKE ZERO HALOGEN TYPE

- Power + Data Extension Cable, Installation type LSZH, BBD-BBD 1 m (3.2 ft.) ..... P/N 91616012
- Power + Data Extension Cable, Installation type LSZH, BBD-BBD 2.5 m (8.2 ft.) ..... P/N 91616013
- Power + Data Extension Cable, Installation type LSZH, BBD-BBD 5 m (16.4 ft.) ..... P/N 91616014
- Power + Data Extension Cable, Installation type LSZH, BBD-BBD 10 m (32.8 ft.) ..... P/N 91616015
- Power + Data Extension Cable, Installation type LSZH, BBD-BBD 25 m (82 ft.) ..... P/N 91616016
- Power + Data Extension Cable, Installation type LSZH, without connectors, 100 m (328.1 ft.) ..... P/N 91616017

### LOOSE CONNECTORS

- Power + Data Cable Connector, BBD, male ..... P/N 91611750
- Power + Data Cable Connector, BBD, female ..... P/N 91611751
- Blanking caps for unused female BBD connectors, set of 10 ..... P/N 91616052

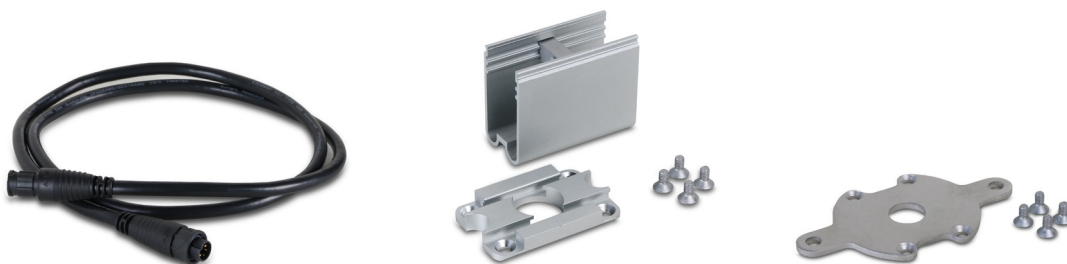

# EXTERIOR DOT-HP

FULLY WEATHERIZED DIRECT-VIEW HIGH INTENSITY LED DOT

SPEC SHEET

## TECHNICAL SPECIFICATIONS

### CONTROL AND PROGRAMMING

Control options ..... Martin P3™ System Controller via Martin P3™ PowerPort 1500, Martin P3™ PowerPort 1000 IP and/or RDM/DMX

Control modes ..... RGB (RGB variants), white intensity (CW variants), basic

Control resolution ..... 16-bit (P3) or 8-bit (DMX) control of each color

Protocol detection ..... Automatic

Setting and addressing ..... Martin P3™ System controller or RDM-compliant DMX controller

DMX channels ..... 3/10

Calibration ..... Color and intensity for each Dot

Firmware update ..... Via Martin P3™ System Controller

DMX compliance ..... USITT DMX512-A

RDM compliance ..... ANSI/ESTA E1.20

### CONTROL/USER INTERFACE

Device status ..... Multi-color visual indication

Device test and reset ..... Magnetic button to call up fixture status and test fixture

### OPTICS

Options ..... Clear Front, Dome Front, Directional Front (TIR lens)

LED manufacturer, Exterior Dot-HP RGB ..... Osram

LED manufacturer, Exterior Dot-HP CW ..... Seoul

Minimum LED lifetime ..... 50,000 hours (to >70% luminous output)\*

*\*Figure obtained under manufacturer's test conditions*

### PHOTOMETRICS

**Color Temperature:**

Cool white (CW) ..... 6700K±300K

RGB ..... 2,000 – 10,000 K (adjustable via P3 or DMX)

**Viewing angle:**

Clear front ..... 103° x 103° (half-peak)

Dome front ..... 125° x 125° (half-peak)

Directional front ..... 22° x 22° (half-peak)

	Clear front	Dome front	Directional front
<b>RGB, calibrated</b>	90 lumens, 36 cd	62 lumens, 18 cd	72 lumens, 270 cd
<b>RGB, non-calibrated</b>	120 lumens, 48 cd	80 lumens, 24 cd	96 lumens, 360 cd
<b>CW, calibrated</b>	160 lumens, 62 cd	110 lumens, 32 cd	120 lumens, 590 cd
<b>CW, non-calibrated</b>	210 lumens, 82 cd	142 lumens, 41 cd	160 lumens, 775 cd

### P3 VIDEO PROCESSING

Color resolution ..... 16 bits per color (48 bit per pixel)

Synchronization ..... System-wide

Frame rate ..... Up to 75 frames/sec

Brightness control ..... 0-100% (at full color resolution)

Gamma Correction and Control ..... Fully controllable

Color Gamut Control ..... Fully controllable

LED ageing correction ..... Built-in

### CONSTRUCTION

Color ..... Electrostatic powder-coated (custom colors available by special order) (custom colors available on project basis)

Base ..... Cast aluminum

Protection rating ..... IP66

Impact resistance ..... IK08

Corrosion resistance ..... C5-M (very high corrosivity / marine, ISO 12944)

Vibration resistance ..... 1.0g, Sinusoidal (IEC 60068-2-6) 0,7g RMS Random (IEC 60068-2-64)

RoHS compliant

### INSTALLATION

Mounting points ..... Direct surface mount, optional mounting plate or optional mounting profile

Orientation ..... Any

### CONNECTIONS

Power and data input ..... 6-pin custom (BBD) IP66-rated

Power and data thru ..... 6-pin custom (BBD) IP66-rated

Hot-pluggable

### ELECTRICAL

Nominal input voltage ..... 48 VDC +/- 4%

Power supply options ..... Martin P3™ PowerPort 1500, P3™ PowerPort 1000 IP, Martin™ IP66 PSU or generic 48 VDC PSU

Typical total power consumption, calibrated mode ..... 5 W at full intensity, full white

Typical total power consumption, uncalibrated mode ..... 7 W at full intensity, full white

Surge protection ..... 4 KV

Max. total number of dots ..... 63 pcs (per PowerPort 1500 output)\*

Max. total number of dots ..... 45 pcs (per PowerPort 1000IP output)\*

Max. total number of dots ..... 42 pcs (Martin IP66 PSU 240W)\*

Max. total cable length (dots and cables) ..... 115 m (377 ft)\*

*\*Refer to system diagram for full details*

# EXTERIOR DOT-HP

FULLY WEATHERIZED DIRECT-VIEW HIGH INTENSITY LED DOT

SPEC SHEET

## TECHNICAL SPECIFICATIONS

### THERMAL


Cooling ..... Convection  
Maximum ambient temperature  
(Ta max.) ..... 55° C (131° F)  
Minimum ambient temperature  
(Ta min.) ..... -20° C (-4° F)  
Total heat dissipation  
(calculated, +/- 10%) ..... 20 BTU/hr.

### APPROVALS

EU safety ..... EN 60950-1, EN 60950-22  
EU EMC ..... EN 55024, EN 55032 (Class A),  
EN 61000-3-2, EN 61000-3-3  
US safety ..... UL 60950-1, UL 60950-22  
US EMC ..... FCC Part 15 Class A  
Canadian safety ..... CSA C22.2 No. 60950-1, No. 60950-22  
Canadian EMC ..... ICES-003 Class A  
Australia/NZ ..... RCM



## MOUNTING OPTIONS

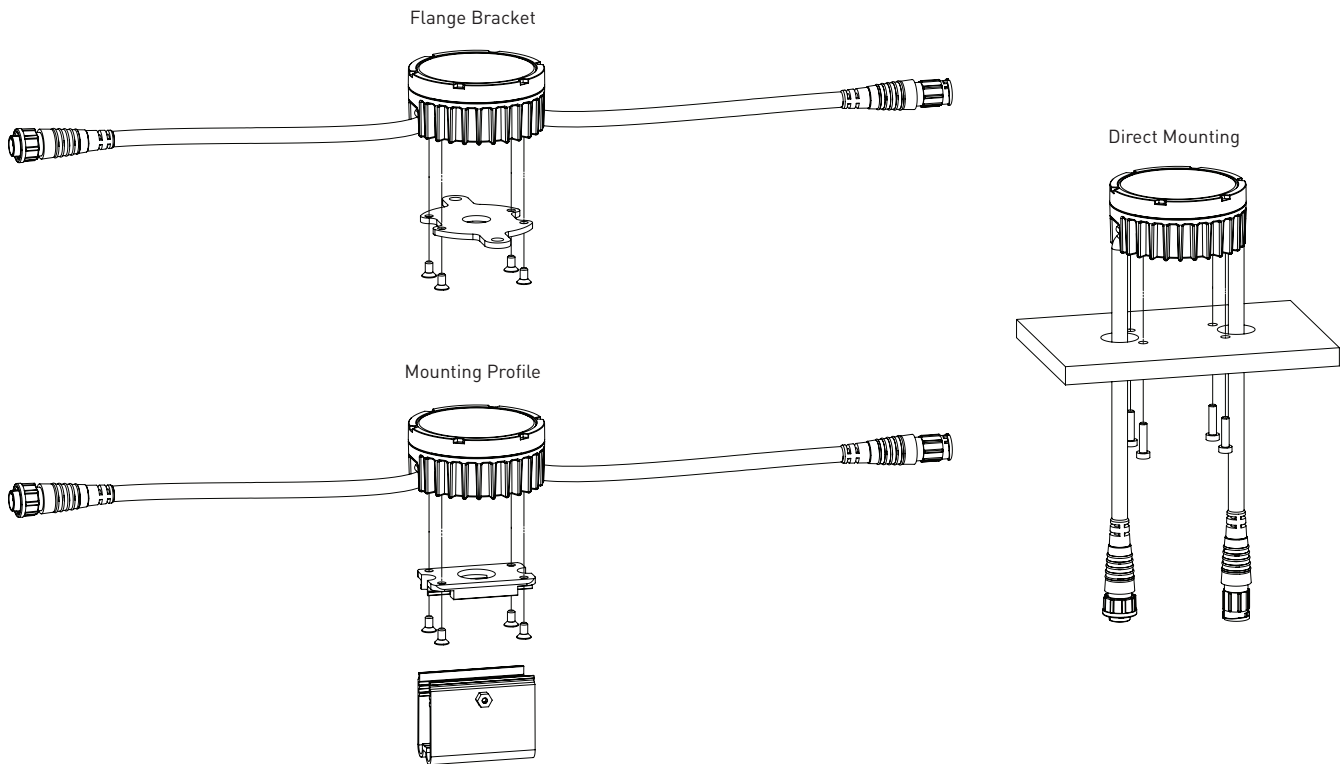

# EXTERIOR DOT-HP

FULLY WEATHERIZED DIRECT-VIEW HIGH INTENSITY LED DOT

SPEC SHEET

## DIMENSIONS

### PHYSICAL

Diameter .....	72 mm (2.9 in.)	Weight, clear front and dome front models .....	300 g (0.7 lbs.)
Height with clear front .....	34 mm (1.4 in.)	Weight, directional front models .....	350 g (0.8 lbs.)
Height with dome front .....	49 mm (2 in.)		
Height with directional front .....	43 mm (1.7 in.)		

