

GENERIC SYSTEM DIAGRAM – VC-DOT 4 WITH P3 CONTROL (PowerPort 1500)



P3 Controllers



- Up to 20,736 pixels
- On-screen grabber for video-capture
- Maximum 500 VC-Dot 4

Internal Video input



Martin P3-050 Controller™
Video signal processor
P/N 90721090

- Up to 100,000 pixels
- Supports input resolutions up to full HD (1920x1080)
- Maximum 500 VC-Dot 4

Media Server (Provided by others)



Martin P3-150 Controller™
Video signal processor
P/N 90721015

- Up to 520,000 pixels
- Supports input resolutions up to full HD (1920x1080)
- Maximum 500 VC-Dot 4





Martin P3-300 Controller™
Video signal processor
P/N 90721060

- Up to 2,080,000 pixels
- Supports input resolutions up to full HD (1920x1080)
- Maximum 500 VC-Dot 4

Maximum 100m Ethernet Cable between any 2 devices (extendable via Gigabit Switch or conversion to fiber)

VC-Dot 4 generic layout

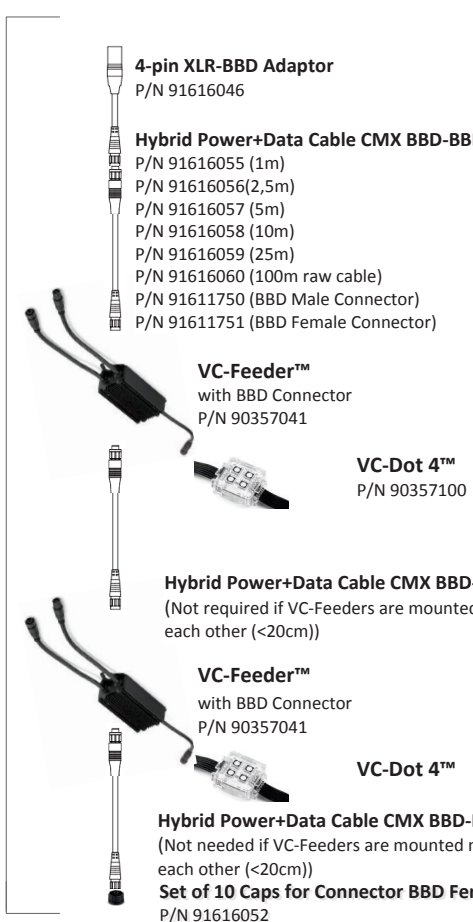

4-pin XLR-BBD Adaptor
P/N 91616046

Hybrid Power+Data Cable CMX BBD-BBD
P/N 91616055 (1m)
P/N 91616056 (2,5m)
P/N 91616057 (5m)
P/N 91616058 (10m)
P/N 91616059 (25m)
P/N 91616060 (100m raw cable)
P/N 91611750 (BBD Male Connector)
P/N 91611751 (BBD Female Connector)

VC-Feeder™
with BBD Connector
P/N 90357041

VC-Dot 4™
P/N 90357100

Hybrid Power+Data Cable CMX BBD-BBD
(Not required if VC-Feeders are mounted next to each other (<20cm))

VC-Feeder™
with BBD Connector
P/N 90357041

VC-Dot 4™

Hybrid Power+Data Cable CMX BBD-BBD
(Not needed if VC-Feeders are mounted next to each other (<20cm))
Set of 10 Caps for Connector BBD Female
P/N 91616052

Low Smoke Zero Halogen (LSZH) version:
P/N 91616012 (1m)
P/N 91616013 (2,5m)
P/N 91616014 (5m)
P/N 91616015 (10m)
P/N 91616016 (25m)
P/N 91616017 (100m raw cable)

Standard VC-Dot 4 configuration:
LED color: RGB
Pitch: 200 mm (7.9 in.)
No. of Dots: 64 pcs.
Lead-in: 2 m (6.6 ft.)

Total length from PowerPort to last VC-Feeder should be less than **50m** (not including the VC-Dot string itself)

Install blanking caps on all unused female connectors at end of chains

Up to 4 daisy-chains per Powerport (one per output)

Maximum VC-Dot 4 per PowerPort
Up to 768 VC-Dot 4's per P3 PowerPort

Maximum VC-Dot 4 per output
Up to 192 VC-Dot 4's per daisy-chain

Examples:
3 strings of 64 VC-Dot 4's or
4 strings of 48 VC-Dot 4's or
6 strings of 32 VC-Dot 4's or ...

2m Lead-in Cable		5m Lead-in Cable (max)	
Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]	Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]
110	64	110	64
200	64 Std. Ver.	200	64
300	64	300	64
400	64	400	64
500	64	500	64
600	64	600	64
700	64	700	64
800	64	800	62
900	62	900	59
1000	59	1000	56
1100	57	1100	54
1200	54	1200	52
1300	53	1300	50
1400	51	1400	49
1500	49	1500	47
1600	48	1600	46
1700	46	1700	45
1800	45	1800	43
1900	44	1900	42
2000	43	2000	41

Configuration limitations:

Maximum number of pixels per string:	64 Pcs.
Standard pixel spacing (pitch):	200 mm (7.9 in.)
Minimum pixel spacing (pitch):	110 mm (4.3 in.)
Maximum pixel spacing (pitch):	2000 mm (78.8 in.)
Standard lead-in cable length:	2000 mm (78.8 in.)
Maximum lead-in cable length:	5000 mm (196.9 in.)

One pixel = one Dot

Please contact your local sales person for customized VC-Dot strings.

GENERIC SYSTEM DIAGRAM – VC-DOT 4 WITH P3 CONTROL (PowerPort 1000 IP65)



P3 Controllers



- Up to 20,736 pixels
- On-screen grabber for video-capture
- Maximum 500 VC-Dot 4

Internal Video input



- Up to 100,000 pixels
- Supports input resolutions up to full HD (1920x1080)
- Maximum 500 VC-Dot 4

Martin P3-050 Controller™
Video signal processor
P/N 90721090

DVI Video input



- Up to 520,000 pixels
- Supports input resolutions up to full HD (1920x1080)
- Maximum 500 VC-Dot 4

Martin P3-150 Controller™
Video signal processor
P/N 90721015

DVI Video input




- Up to 2,080,000 pixels
- Supports input resolutions up to full HD (1920x1080)
- Maximum 500 VC-Dot 4

Martin P3-300 Controller™
Video signal processor
P/N 90721060

DVI or 3G-SDI Video input

Maximum 100m Ethernet Cable between any 2 devices (extendable via Gigabit Switch or conversion to fiber)

VC-Dot 4 generic layout



Martin P3- PowerPort 1000 IP65™
P/N 90721080
N
N — To next P3 PowerPort 1000 IP65

Hybrid Power+Data Cable CMX BBD-BBD

- P/N 91616055 (1m)
- P/N 91616056(2,5m)
- P/N 91616057 (5m)
- P/N 91616058 (10m)
- P/N 91616059 (25m)
- P/N 91616060 (100m raw cable)
- P/N 91611750 (BBD Male Connector)
- P/N 91611751 (BBD Female Connector)

Low Smoke Zero Halogen (LSZH) version:

- P/N 91616012 (1m)
- P/N 91616013(2,5m)
- P/N 91616014 (5m)
- P/N 91616015 (10m)
- P/N 91616016 (25m)
- P/N 91616017 (100m raw cable)



VC-Feeder™
with BBD Connector
P/N 90357041



VC-Dot 4™
P/N 90357100

Standard VC-Dot 4 configuration:

- LED color: RGB
- Pitch: 200 mm (7.9 in.)
- No. of Dots: 64 pcs.
- Lead-in: 2 m (6.6 ft.)



VC-Feeder™
with BBD Connector
P/N 90357041



VC-Dot 4™

Hybrid Power+Data Cable CMX BBD-BBD
(Not needed if VC-Feeder are mounted next to each other (<20cm))
Set of 10 Caps for Connector BBD Female
P/N 91616052

Install blanking caps on all unused female connectors at end of chains

Up to 4 daisy-chains per Powerport (one per output)

Maximum VC-Dot 4 per PowerPort
Up to 512 VC-Dot 4's per P3 PowerPort

Maximum VC-Dot 4 per output
Up to 128 VC-Dot 4's per daisy-chain

Examples:

- 2 strings of 64 VC-Dot 4's or
- 4 strings of 32 VC-Dot 4's or
- 8 strings of 16 VC-Dot 4's or ...

2m Lead-in Cable		5m Lead-in Cable (max)	
Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]	Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]
110	64	110	64
200	64 Std. Ver.	200	64
300	64	300	64
400	64	400	64
500	64	500	64
600	64	600	64
700	64	700	64
800	64	800	62
900	62	900	59
1000	59	1000	56
1100	57	1100	54
1200	54	1200	52
1300	53	1300	50
1400	51	1400	49
1500	49	1500	47
1600	48	1600	46
1700	46	1700	45
1800	45	1800	43
1900	44	1900	42
2000	43	2000	41

Configuration limitations:

Maximum number of pixels per string:	64 Pcs.
Standard pixel spacing (pitch):	200 mm (7.9 in.)
Minimum pixel spacing (pitch):	110 mm (4.3 in.)
Maximum pixel spacing (pitch):	2000 mm (78.8 in.)
Standard lead-in cable length:	2000 mm (78.8 in.)
Maximum lead-in cable length:	5000 mm (196.9 in.)

One pixel = one Dot

Please contact your local sales person for customized VC-Dot strings.

DMX Source

GENERIC SYSTEM DIAGRAM – VC-DOT 4 WITH DMX CONTROL




(PROVIDED BY OTHERS)

DMX limitations with Pixel-level control (1 universe)

VC-Dot 4: 170 dots

VC-Dot 4 generic layout

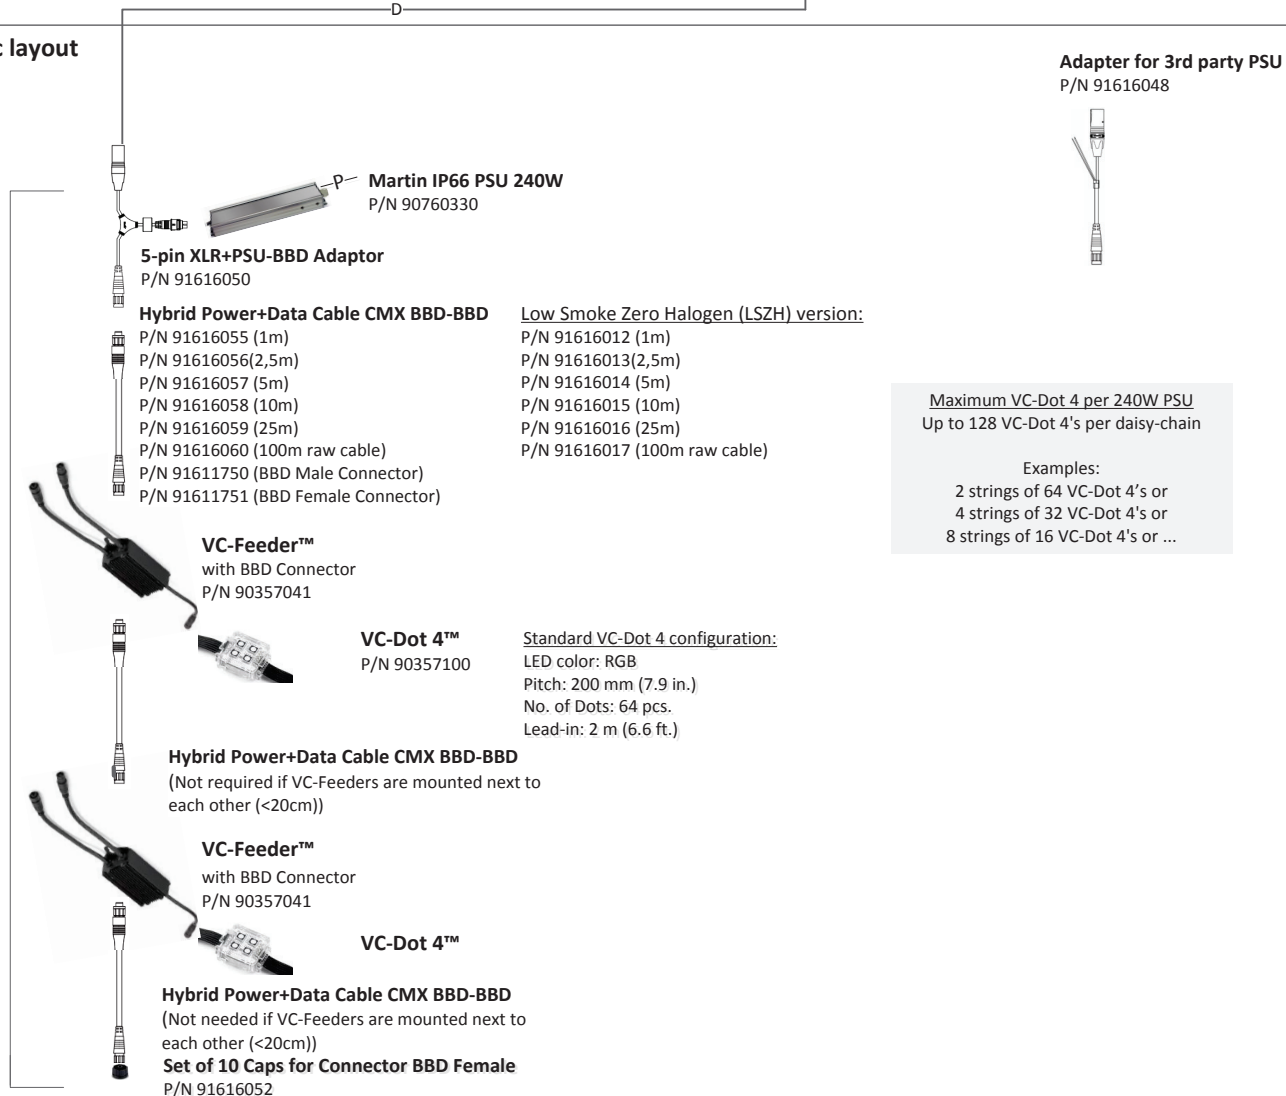

Total length from power supply to last VC-Feeder should be less than **50m** (not including the VC-Dot string itself)

Install blanking caps on all unused female connectors at end of chains

CABLES:
D - DMX CABLE F - FIBER OPTIC CABLE (PROVIDED BY OTHERS) H - HYBRID CABLE (PROVIDED BY MARTIN) P - POWER CABLE V - VIDEO CABLE (PROVIDED BY OTHERS) N - CAT6 STP CABLE (PROVIDED BY OTHERS)

2m Lead-in Cable		5m Lead-in Cable (max)	
Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]	Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]
110	64	110	64
200	64 Std. Ver.	200	64
300	64	300	64
400	64	400	64
500	64	500	64
600	64	600	64
700	64	700	64
800	64	800	62
900	62	900	59
1000	59	1000	56
1100	57	1100	54
1200	54	1200	52
1300	53	1300	50
1400	51	1400	49
1500	49	1500	47
1600	48	1600	46
1700	46	1700	45
1800	45	1800	43
1900	44	1900	42
2000	43	2000	41

Configuration limitations:	
Maximum number of pixels per string:	64 Pcs.
Standard pixel spacing (pitch):	200 mm (7.9 in.)
Minimum pixel spacing (pitch):	110 mm (4.3 in.)
Maximum pixel spacing (pitch):	2000 mm (78.8 in.)
Standard lead-in cable length:	2000 mm (78.8 in.)
Maximum lead-in cable length:	5000 mm (196.9 in.)
One pixel = one Dot	

Please contact your local sales person for customized VC-Dot strings.

Information subject to change without notice. HARMAN Professional Denmark ApS disclaims liability for any injury, damage, direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. Rev C – 27-05-2020

DMX Source

GENERIC SYSTEM DIAGRAM – VC-DOT 4 WITH DMX CONTROL (DMX PowerPort 375)



(PROVIDED BY OTHERS)




(PROVIDED BY OTHERS)

DMX limitations with Pixel-level control (1 universe)

VC-Dot 4: 170 dots

VC-Dot 4 generic layout

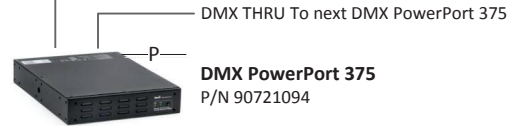

4-pin XLR-BBD Adaptor
P/N 91616046

Hybrid Power+Data Cable CMX BBD-BBD Low Smoke Zero Halogen (LSZH) version:
 P/N 91616055 (1m) P/N 91616012 (1m)
 P/N 91616056(2,5m) P/N 91616013(2,5m)
 P/N 91616057 (5m) P/N 91616014 (5m)
 P/N 91616058 (10m) P/N 91616015 (10m)
 P/N 91616059 (25m) P/N 91616016 (25m)
 P/N 91616060 (100m raw cable) P/N 91616017 (100m raw cable)
 P/N 91611750 (BBD Male Connector)
 P/N 91611751 (BBD Female Connector)

VC-Feeder™
with BBD Connector
P/N 90357041

Total length from PowerPort to last VC-Feeder should be less than **50m** (not including the VC-Dot string itself)

VC-Dot 4™ Standard VC-Dot 4 configuration:
 P/N 90357100
 LED color: RGB
 Pitch: 200 mm (7.9 in.)
 No. of Dots: 64 pcs.
 Lead-in: 2 m (6.6 ft.)

Hybrid Power+Data Cable CMX BBD-BBD
(Not required if VC-Feeders are mounted next to each other (<20cm))

VC-Feeder™
with BBD Connector
P/N 90357041

VC-Dot 4™

Hybrid Power+Data Cable CMX BBD-BBD
(Not needed if VC-Feeders are mounted next to each other (<20cm))
Set of 10 Caps for Connector BBD Female
 P/N 91616052

Install blanking caps on all unused female connectors at end of chains

Maximum VC-Dot 4 per DMX PowerPort 375 (240V input)
 Up to 192 VC-Dot 4's per daisy-chain

Examples:
 3 strings of 64 VC-Dot 4's or
 4 strings of 48 VC-Dot 4's or
 6 strings of 32 VC-Dot 4's or ...

Maximum VC-Dot 4 per DMX PowerPort 375 (120V input)
 Up to 128 VC-Dot 4's per daisy-chain

Examples:
 2 strings of 64 VC-Dot 4's or
 4 strings of 32 VC-Dot 4's or
 8 strings of 16 VC-Dot 4's or ...

2m Lead-in Cable		5m Lead-in Cable (max)	
Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]	Dot Spacing [mm]	Max. Number Of Dots per String/ VC-Feeder [Pcs]
110	64	110	64
200	64 Std. Ver.	200	64
300	64	300	64
400	64	400	64
500	64	500	64
600	64	600	64
700	64	700	64
800	64	800	62
900	62	900	59
1000	59	1000	56
1100	57	1100	54
1200	54	1200	52
1300	53	1300	50
1400	51	1400	49
1500	49	1500	47
1600	48	1600	46
1700	46	1700	45
1800	45	1800	43
1900	44	1900	42
2000	43	2000	41

Configuration limitations:	
Maximum number of pixels per string:	64 Pcs.
Standard pixel spacing (pitch):	200 mm (7.9 in.)
Minimum pixel spacing (pitch):	110 mm (4.3 in.)
Maximum pixel spacing (pitch):	2000 mm (78.8 in.)
Standard lead-in cable length:	2000 mm (78.8 in.)
Maximum lead-in cable length:	5000 mm (196.9 in.)
One pixel = one Dot	

Please contact your local sales person for customized VC-Dot strings.