


CM7

A unique medium-throw speaker with very high SPL's in an ultra-compact design with constant coverage. Featuring 18 flying points - four of which are fully adjustable - and a customized U-bracket included as standard with every speaker, the C-Range is an extremely versatile installation speaker series. The distinct new CM7 in the C-Range speaker series from MACH powerfully projects every nuance of pure sound in any environment you choose.

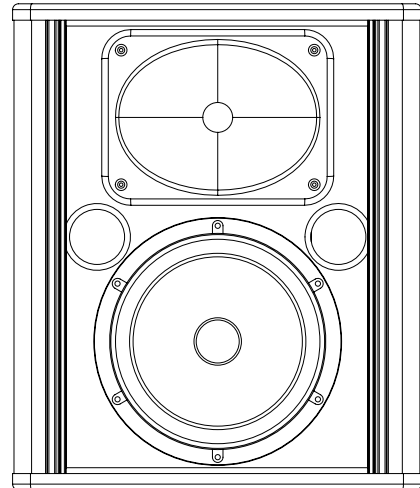

- Unique medium-throw speaker with very high SPL's in an ultra-compact design with constant coverage
- A 2-way speaker designed as a compact top box with a controlled dispersion pattern
- One 8" mid-woofer with very low power compression and high power handling
- The tweeter is a 1" compression driver with a constant coverage horn
- Designed specifically for applications in which high SPL and clarity are required
- Ideal for small to medium-sized venues in combination with a subwoofer or as a delay speaker

SPECIFICATIONS

Power rating IEC268: 300 watt
Power rating peak: 1200 watt
Sensitivity 1w/1m: 96dB (avg.)
Max SPL, calculated long term: 121dB
Max SPL, peak: 127 dB
Frequency range +/-3dB: 80 Hz - 20 kHz
Dispersion angle avg. H 90 x V 60 deg
Nominal impedance: 8 ohm
Recommended amplifier: 400 watt in 8 ohm

WEIGHT & MEASUREMENTS:

Dimensions (HxWxD): 40 x 34.9 x 33.8 cm
(15.7 x 13.7 x 13.3 inches)
Net weight: 15kg (33 lb)
Finish: Black or white SafeCoat coating with other colors optional
Grille: 2 mm steel with foam backing
Input connectors: 2 x Speakon® NL 4 and barrier strip terminals
Rigging hardware: Included U-bracket.