


Photometric Report

MAR-90356994 Exterior Linear 1210 QUAD Graze Wide – Max

MARTIN PROFESSIONAL R&D OPTICAL LABORATORY


GENERAL SPECIFICATIONS

Total Fixture Output:	2822 lm
Light Engine Output:	4268 lm
Efficacy:	34 lm/W
Lens Option:	Wide
Beam Angle (50%):	62°
Field Angle (10%):	96°
Cut-off Angle (3%):	119°
CRI:	73+
CQS:	87+
TM-30 Rf:	83+
TM-30 Rg:	105+
TLCI:	75+
Color Temperature:	Variable



SAMPLE MEASUREMENT

POLAR PLOT

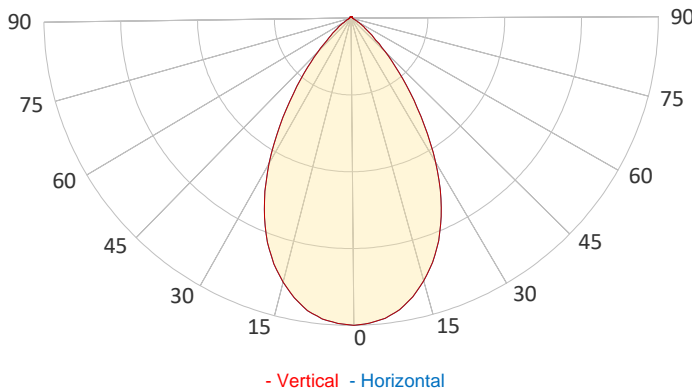


Catalog Number:	MAR-90356994
Measured Output:	2767 lm
Measured Peak:	2458 cd
Consumed Power:	75.9 W
Efficacy:	37.4 lm/W

Beam Angle (50%):	62.8°
Field Angle (10%):	97.4°
Cut-off Angle (3%):	122°

Measurement Condition:	
Ambient Temperature:	25° +/- 5° C
AC Supply:	230V/50Hz
Fan Mode:	No Fan
Fixture Warm-up Time:	30 minutes



SPECTRAL DISTRIBUTION

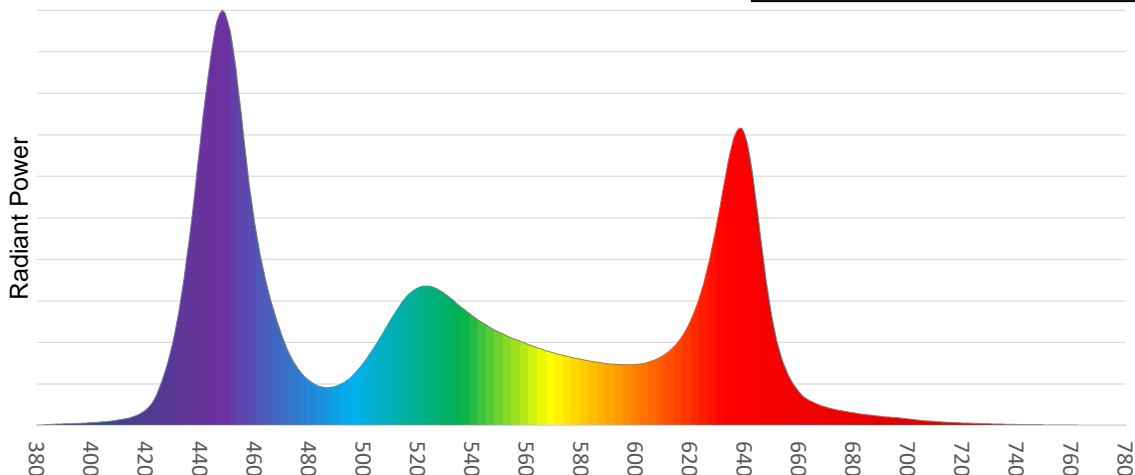


Photometric Report

MAR-90356994 Exterior Linear 1210 QUAD Graze Wide – Max


CHROMATICITY

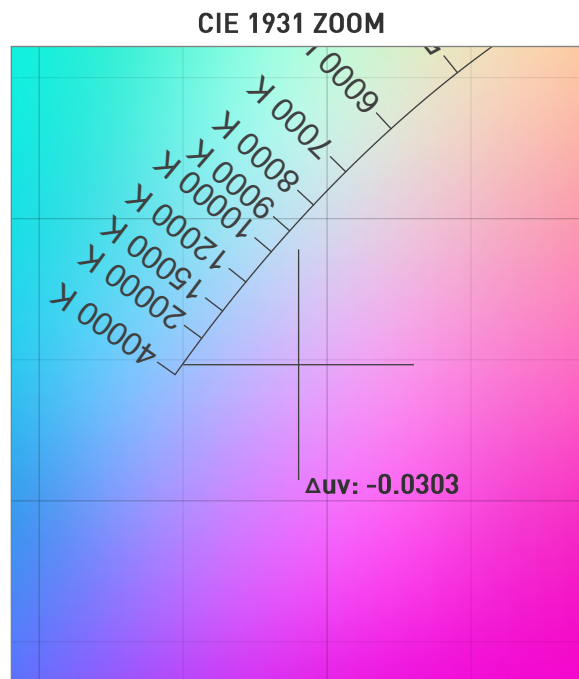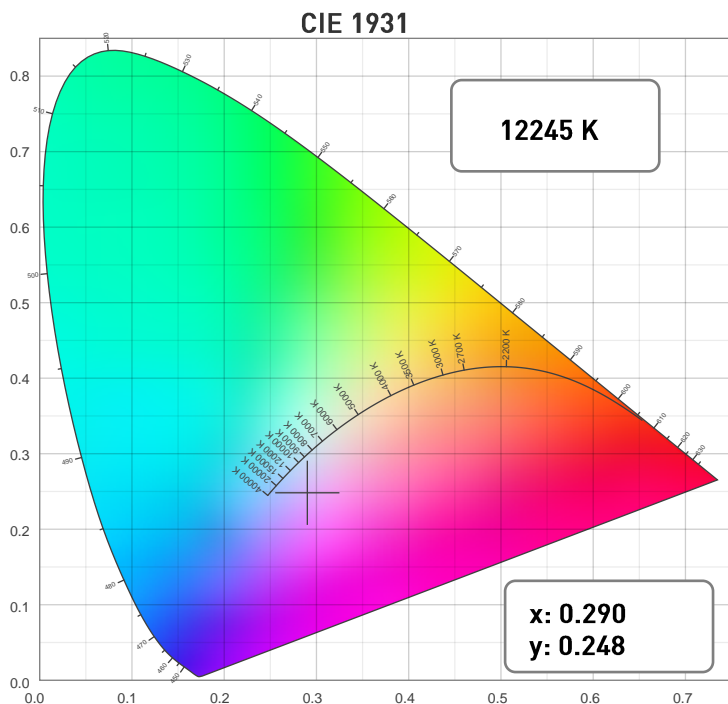

TM30: 68.6

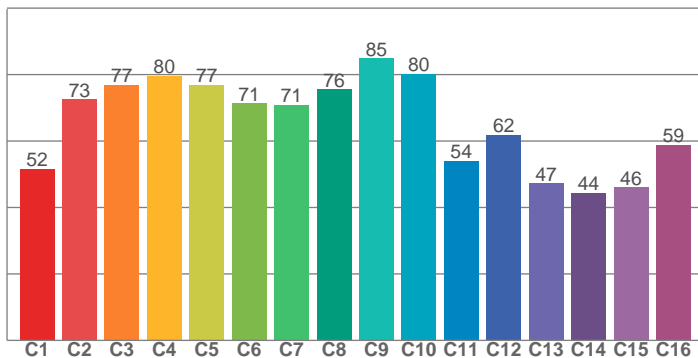


CRI: 54.8 (R1-R8)

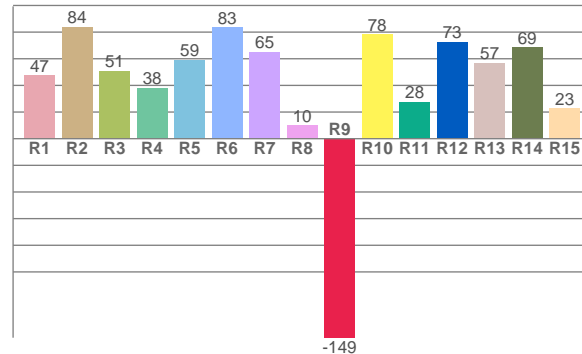

COLOR PARAMETERS

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
12245 K	54.8	-149.4	68.6	123.6

CQS: 80.9

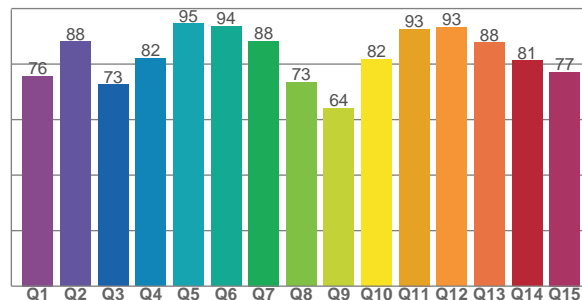

Television Lighting Consistency Index	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate CIE 1964	Color Coordinate CIE 1964	Color Deviation from Black Body
TLCI	CQS	x	y	u	v	Δuv
75+	80.9	0.290	0.248	0.215	0.276	-0.0303

Photometric Report

MAR-90356994 Exterior Linear 1210 QUAD Graze Wide – Max

TM30



Rf 68.6

Fidelity index Rf



Rg 123.6

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	52	27%	3%
2	73	12%	-4%
3	77	10%	-5%
4	80	6%	4%
5	77	6%	9%
6	71	14%	14%
7	71	2%	6%
8	76	14%	6%
9	85	5%	7%
10	80	-1%	14%
11	54	0%	23%
12	62	-4%	33%
13	47	6%	40%
14	44	13%	37%
15	46	37%	35%
16	59	19%	9%

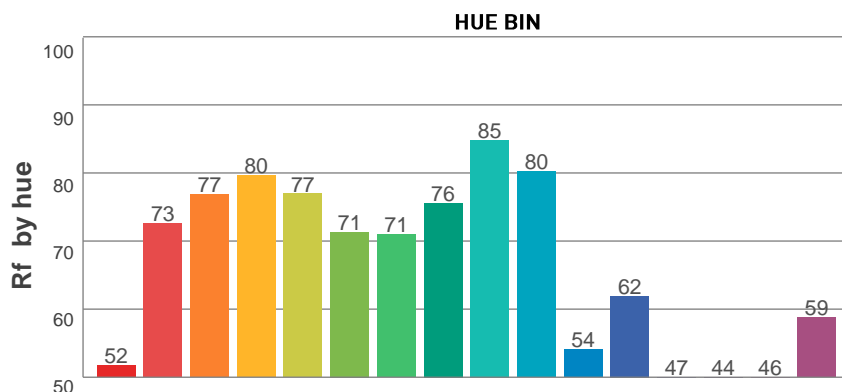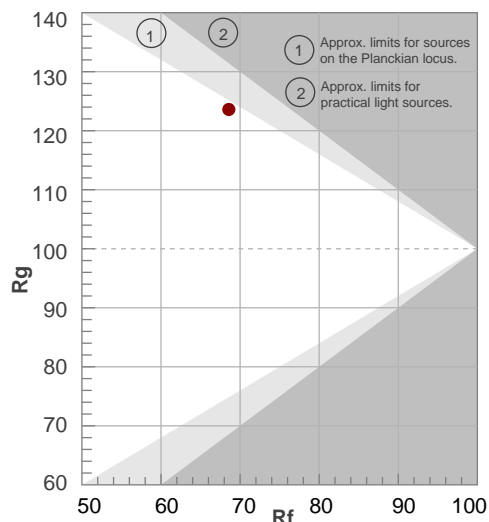


COLOR VECTOR GRAPHICS

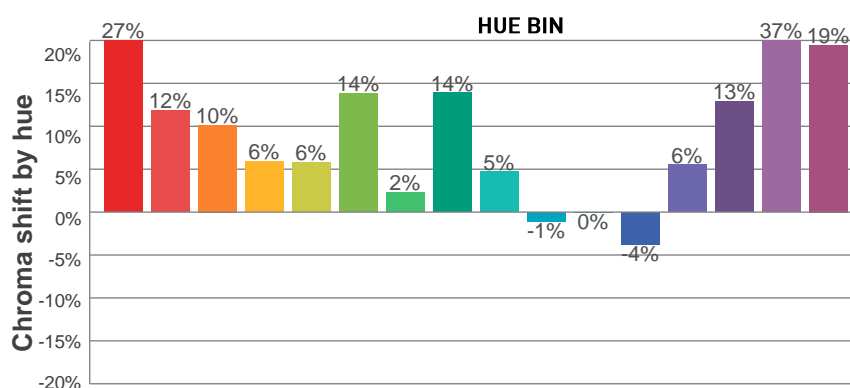

COLOR DISTORTION GRAPHICS




COLOR EVALUATION SAMPLE

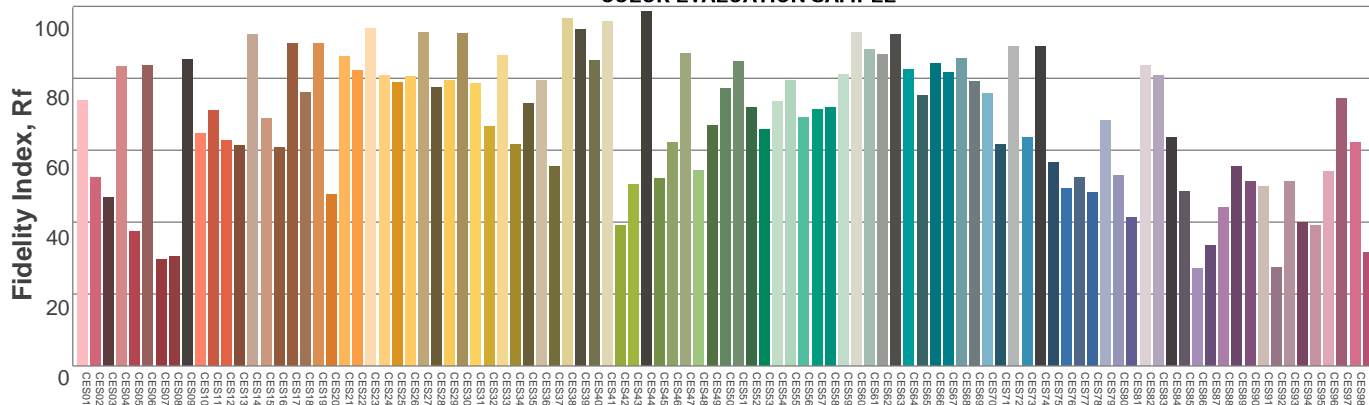

Photometric Report


MAR-90356994 Exterior Linear 1210 QUAD Graze Wide – Max

BEAM DETAILS

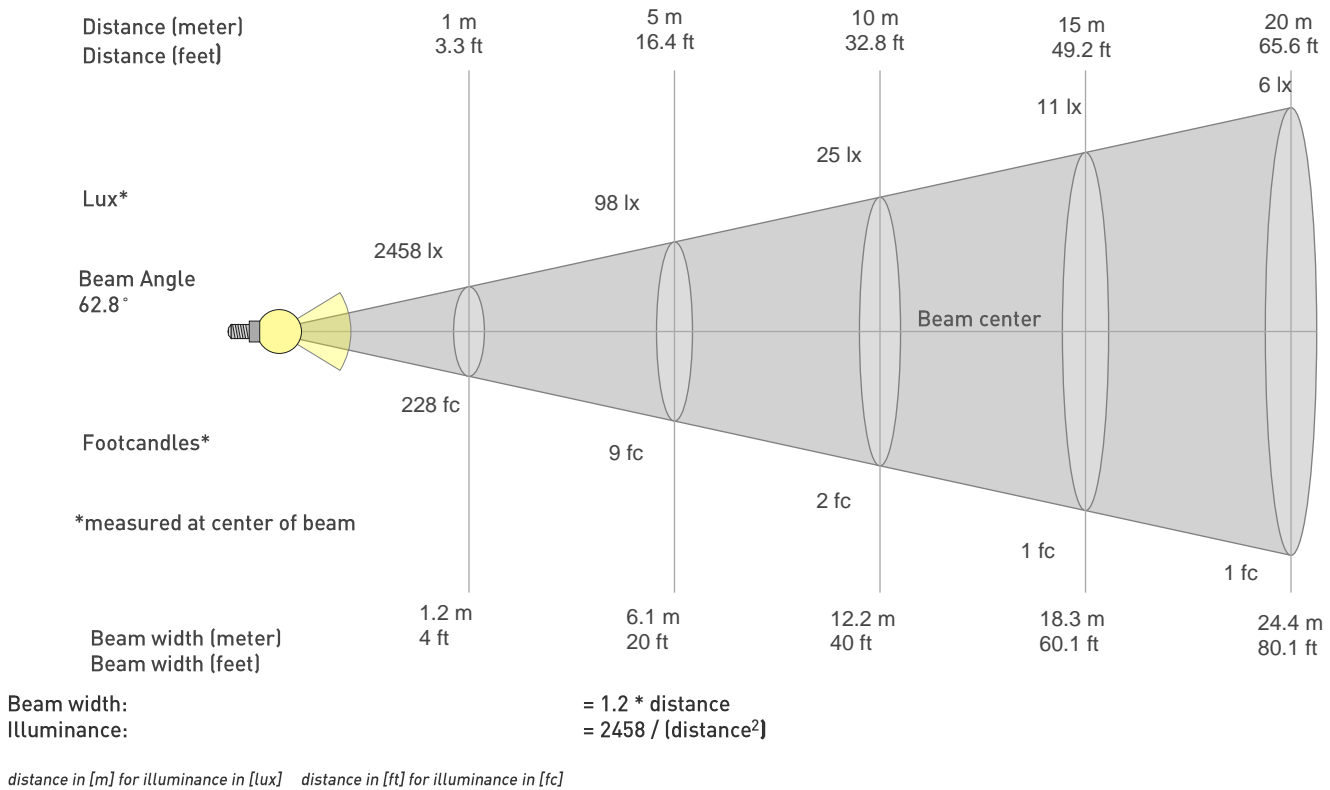

BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2458lx	615lx	273lx	154lx	98lx	68lx	50lx	38lx	30lx	25lx	20lx	17lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx
228.4fc	57.1fc	25.4fc	14.3fc	9.1fc	6.3fc	4.7fc	3.6fc	2.8fc	2.3fc	1.9fc	1.6fc	1.4fc	1.2fc	1fc	0.9fc	0.8fc	0.7fc	0.6fc	0.6fc

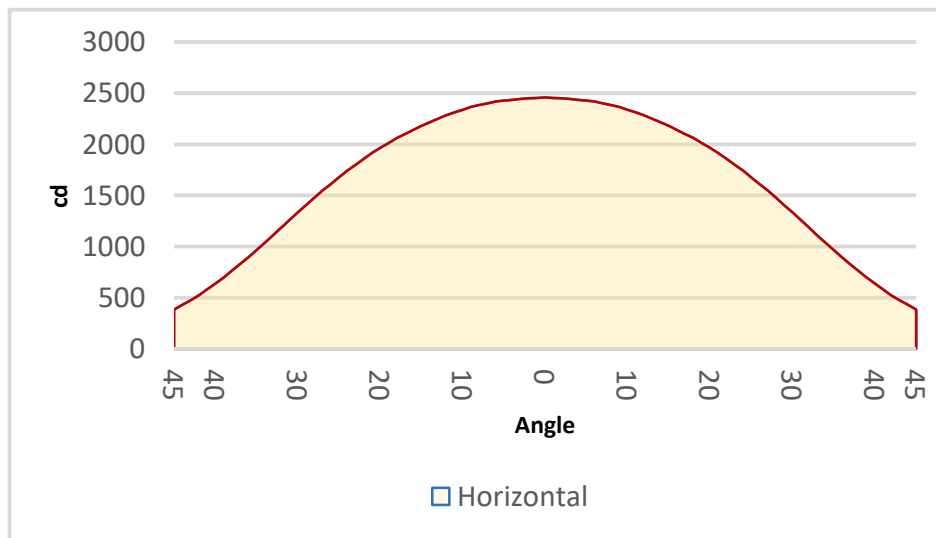

BEAM ANGLE 50%	FIELD ANGLE 10%	CUTOFF ANGLE 3%
62.8°	97.4°	122°