
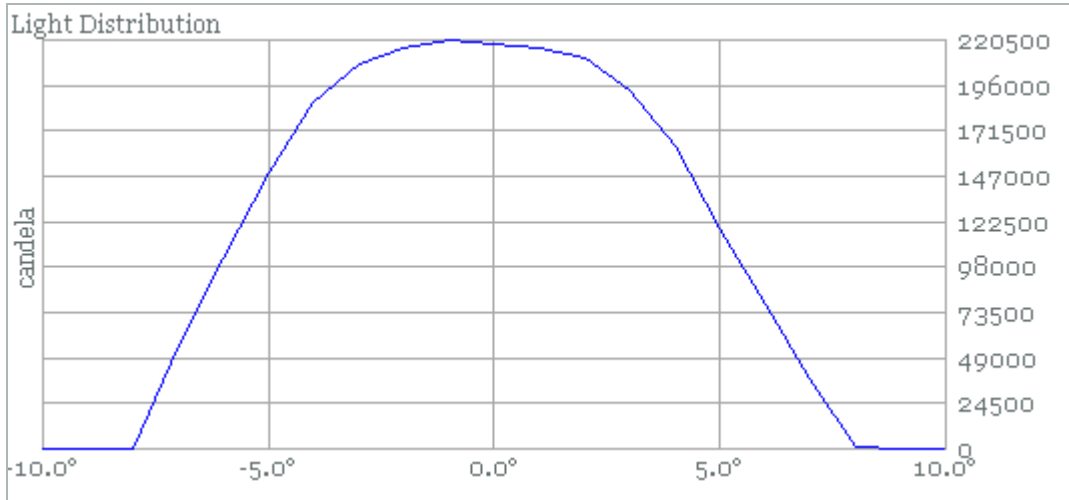
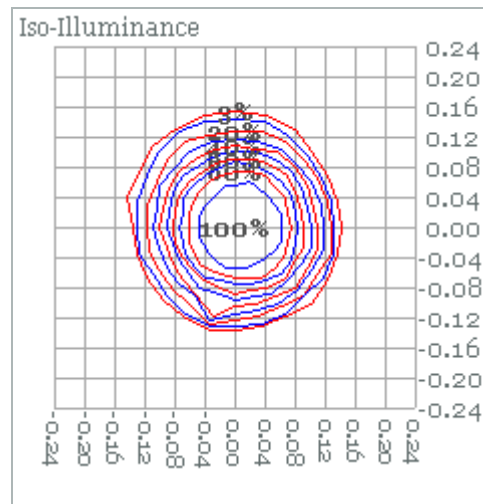
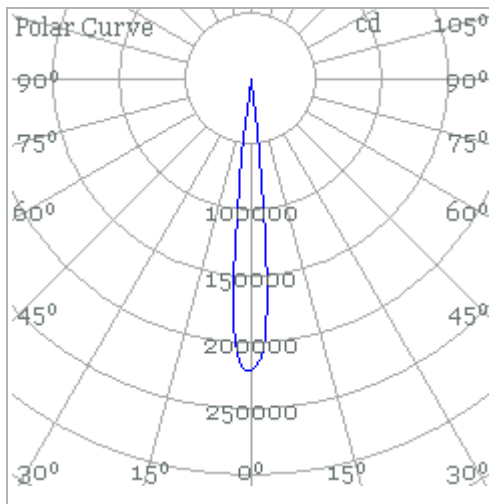


Exterior 400 Image Projector


Photometrics




Standard (Narrow lens) (16°)

m.	Ø 3%	16°	E (lux)	Efficacy
5	1.4		8800	15.9 lumens per watt
10	2.8		2200	Cutoff peak diameter
20	5.6		550	0.28 X distance(m)
30	8.4		244	Illuminance
50	14.1		88	220000 / distance ² (lux)
				Total Output
				7000 (lumens)




Standard (Medium lens) (25°)

m.	Ø 3%	25°	E (lux)	Efficacy
5	2.2		4240	16 lumens per watt
10	4.4		1060	Cutoff peak diameter
20	8.9		265	0.44 X distance(m)
30	13.3		118	Illuminance
50	22.2		42	106000 / distance ² (lux)
				Total Output
				7100 (lumens)

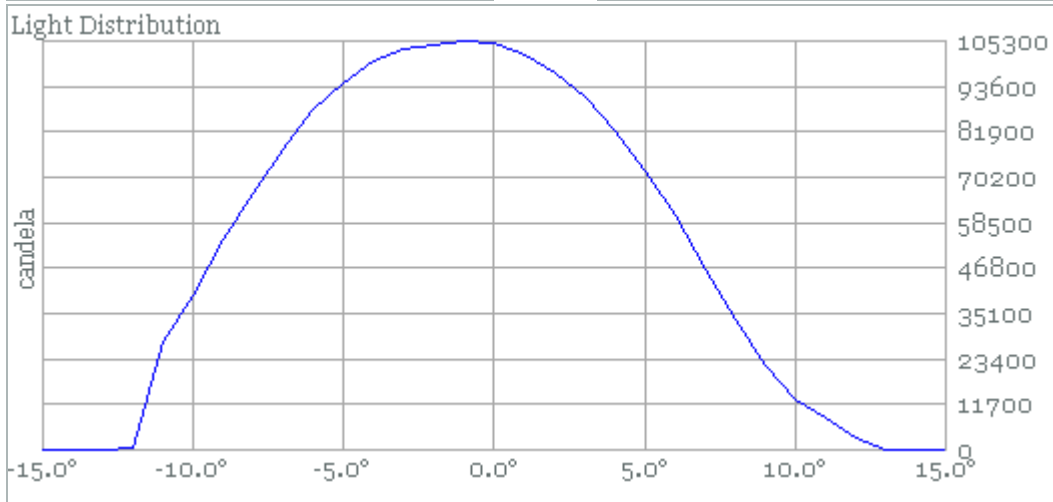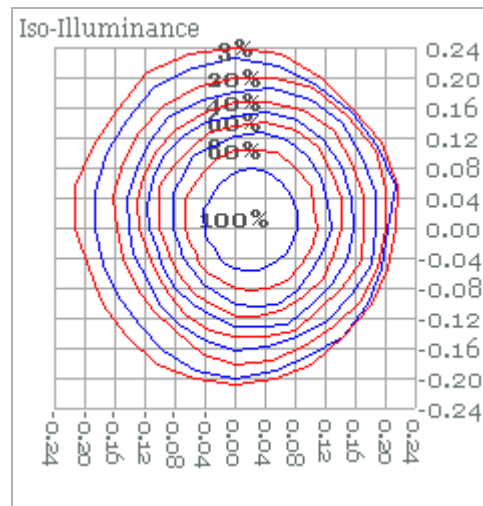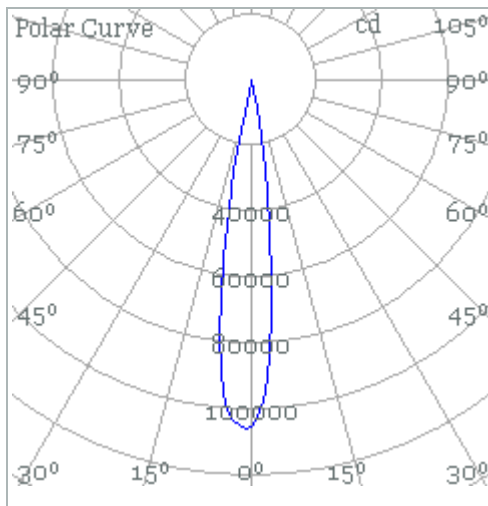

Standard (Wide lens) (42°)

m.	Ø 3%	42°	E (lux)	Efficacy
5	3.8		1360	17.1 lumens per watt
10	7.7		340	Cutoff peak diameter
20	15.4		85	0.77 X distance(m)
30	23.0		38	Illuminance
50	38.4		14	34000 / distance ² (lux)
				Total Output
				7500 (lumens)

