

Photometric Report

MAR-90356991 Exterior Linear 310 QUAD Graze Wide – Only Red

MARTIN PROFESSIONAL R&D OPTICAL LABORATORY


GENERAL SPECIFICATIONS

Total Fixture Output:	706 lm
Light Engine Output:	1067 lm
Efficacy:	34 lm/W
Lens Option:	Wide
Beam Angle (50%):	62°
Field Angle (10%):	96°
Cut-off Angle (3%):	119°
CRI:	73+
Color Temperature:	Variable



SAMPLE MEASUREMENT

POLAR PLOT

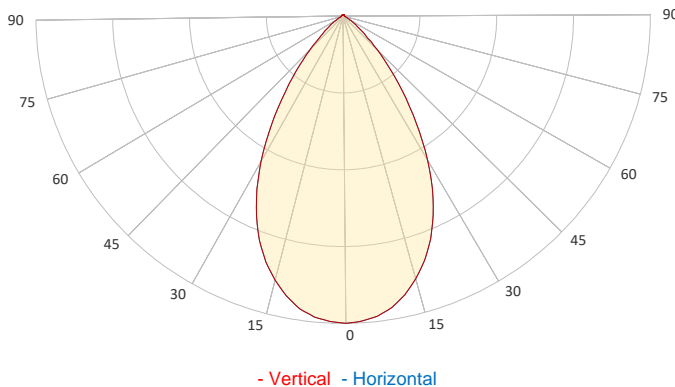


Catalog Number:	MAR-90356991
Measured Output:	171 lm
Measured Peak:	152 cd
Consumed Power:	12.0 W
Efficacy:	16.4 lm/W

Beam Angle (50%):	62.8°
Field Angle (10%):	97.4°
Cut-off Angle (3%):	122°

Measurement Condition:	
Ambient Temperature:	25° +/- 5° C
AC Supply:	230V/50Hz
Fan Mode:	No Fan
Fixture Warm-up Time:	60 minutes


SPECTRAL DISTRIBUTION

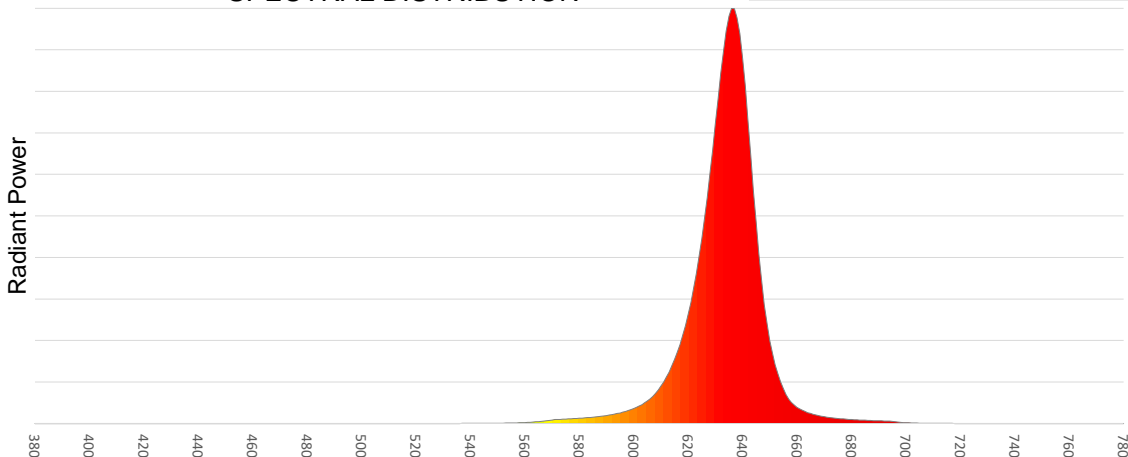

Photometric Report

MAR-90356991 Exterior Linear 310 QUAD Graze Wide – Only Red

BEAM DETAILS

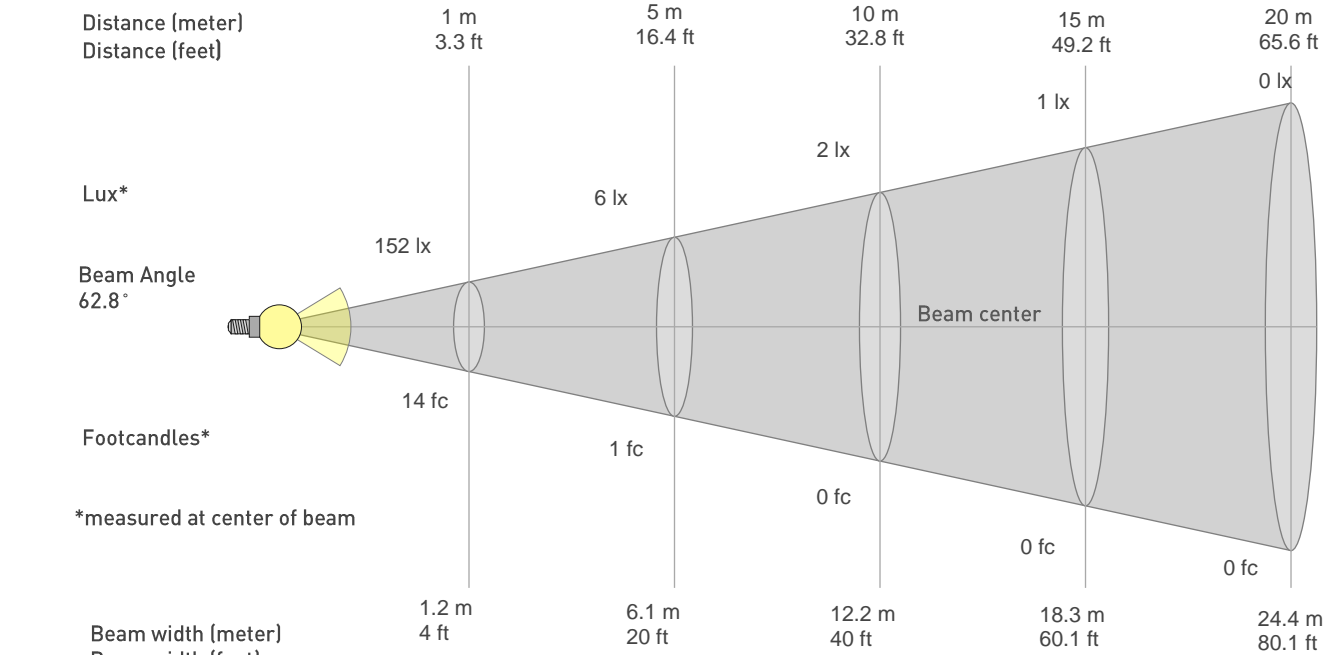


Beam width: = 1.2 * distance
Illuminance: = 152 / (distance²)

distance in [m] for illuminance in [lux] distance in [ft] for illuminance in [fc]

BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
152lx	38lx	17lx	9lx	6lx	4lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx
14.1fc	3.5fc	1.6fc	0.9fc	0.6fc	0.4fc	0.3fc	0.2fc	0.2fc	0.1fc	0.1fc	0.1fc	0.1fc	0.1fc	0.1fc	0.1fc	0fc	0fc	0fc	0fc

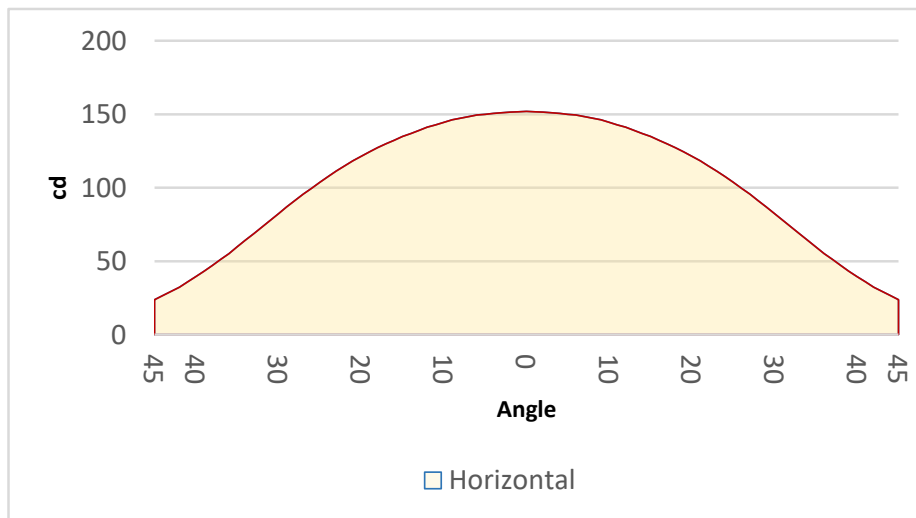

BEAM ANGLE 50%	FIELD ANGLE 10%	CUTOFF ANGLE 3%
62.8°	97.4°	122°