


Photometric Report

MAR-90356995 Exterior Linear 1210 QUAD Graze Asymmetric – Only Green

MARTIN PROFESSIONAL R&D OPTICAL LABORATORY


GENERAL SPECIFICATIONS

Total Fixture Output:	2822 lm
Light Engine Output:	4268 lm
Efficacy:	34 lm/W
Lens Option:	Asymmetric
Beam Angle (50%):	17x67°
Field Angle (10%):	33x98°
Cut-off Angle (3%):	54x117°
CRI:	73+
CQS:	87+
TM-30 Rf:	83+
TM-30 Rg:	105+
TLCI:	75+
Color Temperature:	Variable



SAMPLE MEASUREMENT

POLAR PLOT

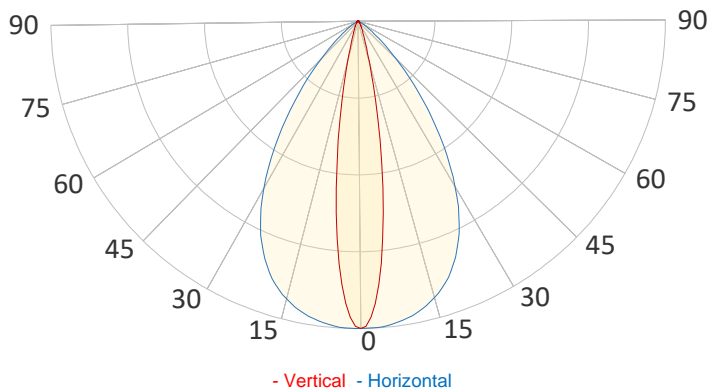


Catalog Number:	MAR-90356995
Measured Output:	1739 lm
Measured Peak:	4161 cd
Consumed Power:	64.0 W
Efficacy:	27.2 lm/W

Beam Angle (50%):	17x67°
Field Angle (10%):	33x98°
Cut-off Angle (3%):	54x117°

Measurement Condition:	
Ambient Temperature:	25° +/- 5° C
AC Supply:	230V/50Hz
Fan Mode:	No Fan
Fixture Warm-up Time:	30 minutes


SPECTRAL DISTRIBUTION

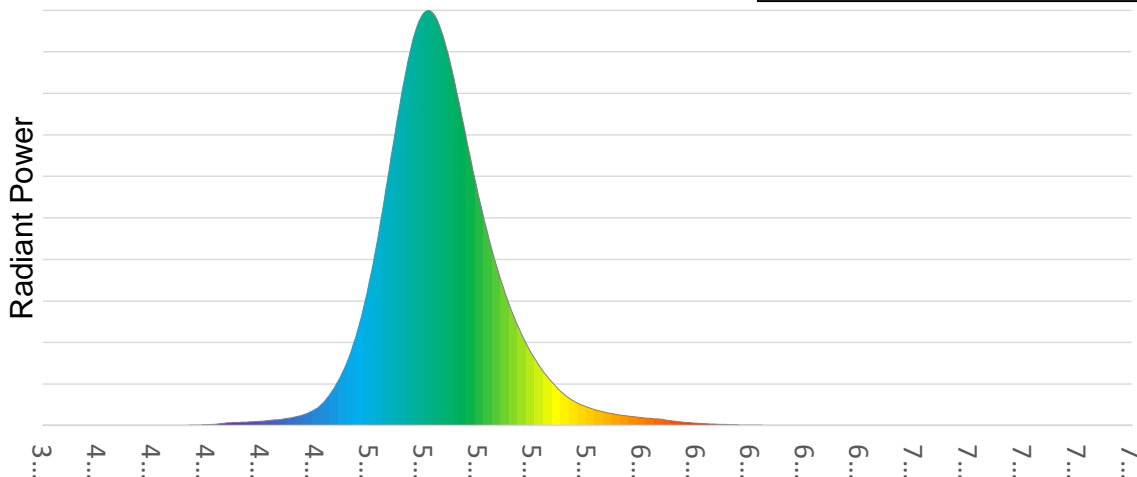

Photometric Report


MAR-90356995 Exterior Linear 1210 QUAD Graze Asymmetric – Only Green

BEAM DETAILS

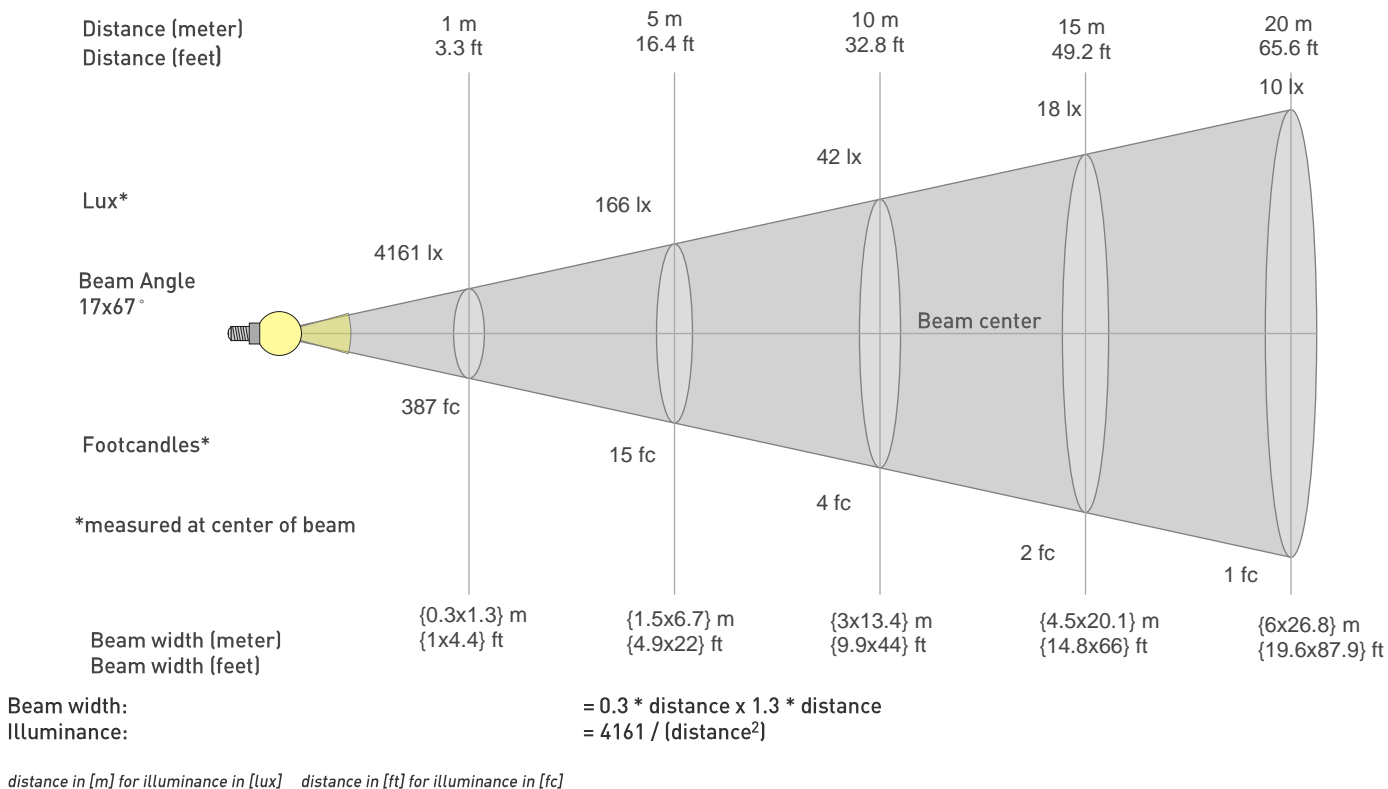

BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4161lx	1040lx	462lx	260lx	166lx	116lx	85lx	65lx	51lx	42lx	34lx	29lx	25lx	21lx	18lx	16lx	14lx	13lx	12lx	10lx
386.5fc	96.6fc	42.9fc	24.2fc	15.5fc	10.7fc	7.9fc	6fc	4.8fc	3.9fc	3.2fc	2.7fc	2.3fc	2fc	1.7fc	1.5fc	1.3fc	1.2fc	1.1fc	1fc

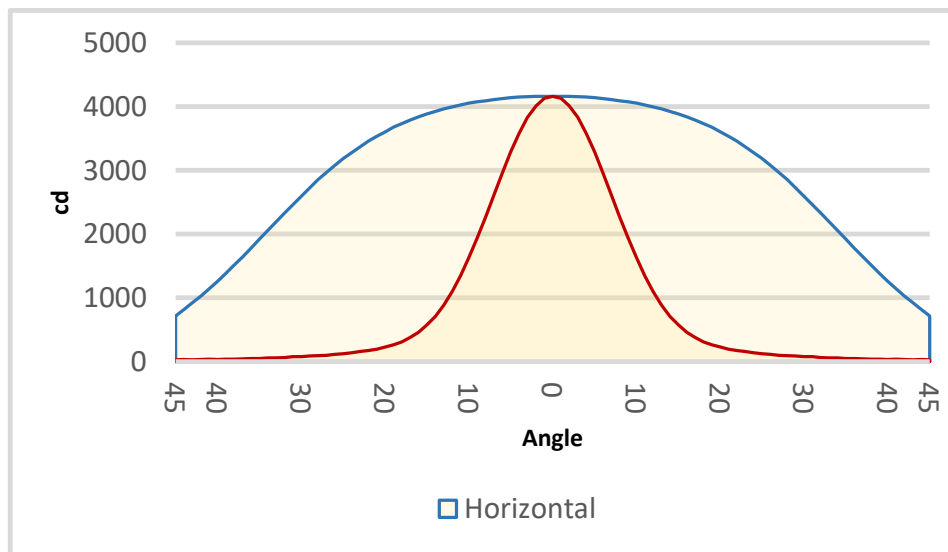

BEAM ANGLE 50%	FIELD ANGLE 10%	CUTOFF ANGLE 3%
17x67°	33x98°	54x117°