
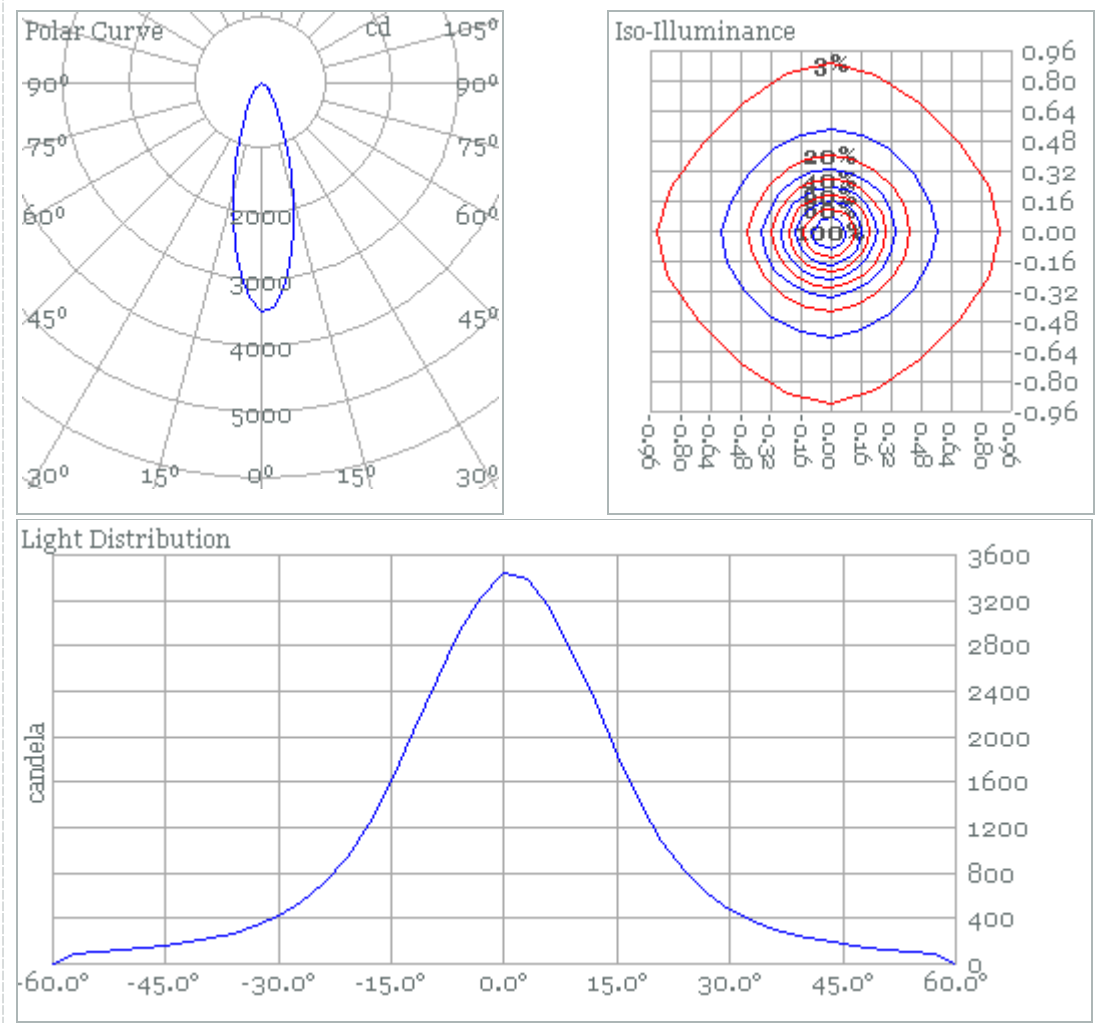



Tripix Wash Photometrics




Standard (Narrow Diffuser) (29°)

m.	Ø 50%	29°	E (lux)	Efficacy
5	2.6		136	19.7 lumens per watt
10	5.2		34	Half-peak diameter
20	10.3		9	0.52 X distance(m)
30	15.5		4	Illuminance
50	25.9		1	3400 / distance² (lux)
				Total Output
				1400 (lumens)




Standard (Without Diffuser) (22°)

m.	Ø 50%	22°	E (lux)	Efficacy
5	1.9		232	19.6 lumens per watt
10	3.9		58	Half-peak diameter
20	7.8		15	0.39 X distance(m)
30	11.7		6	Illuminance
50	19.4		2	5800 / distance ² (lux)
				Total Output
				1400 (lumens)

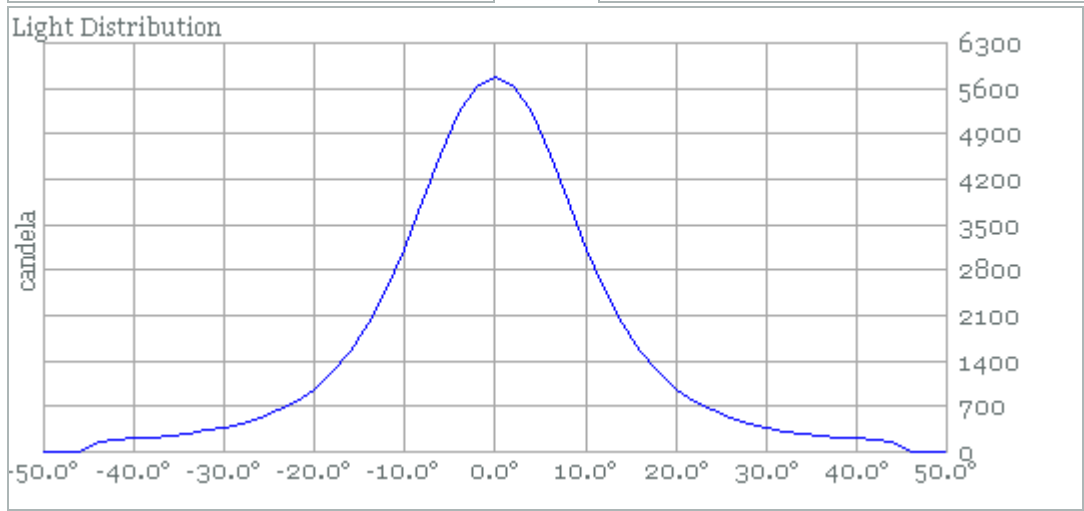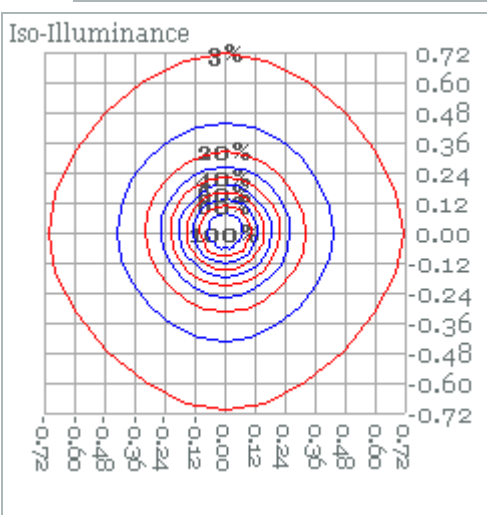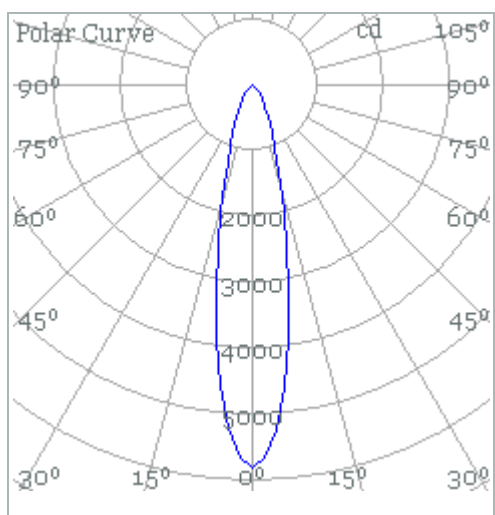

Standard (Medium Diffuser) (78°)

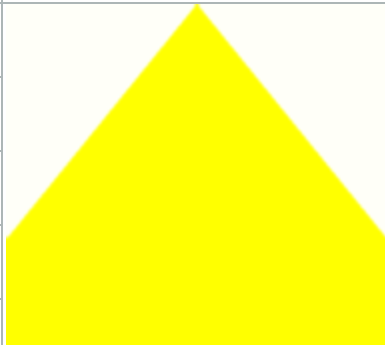m.	Ø 50%	78°	E (lux)	Efficacy
5	8.1		34	21 lumens per watt
10	16.2		9	Half-peak diameter
20	32.4		2	1.62 X distance(m)
30	48.6		1	Illuminance
50	81.0		0	860 / distance ² (lux)
				Total Output
				1500 (lumens)

