
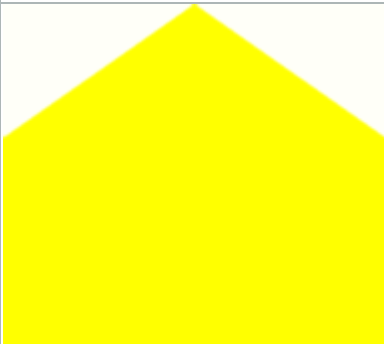



# VC-Strip 60 Photometrics

Standard (VC-Strip 4x1 - All LEDs on) (110°)				
m.	Ø 50%	110°	E (lux)	Efficacy
5	14.3		0	27.8 lumens per watt
10	28.6		0	Half-peak diameter
20	57.1		0	2.86 X distance(m)
30	85.7		0	Illuminance
50	142.8		0	10 / distance² (lux)
				Total Output
				30 (lumens)

Polar Curve

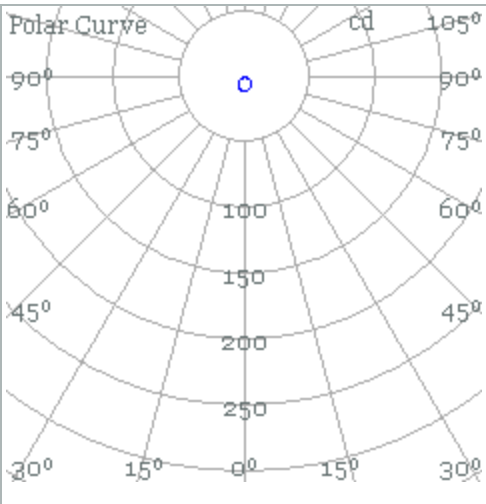


Iso-Illuminance

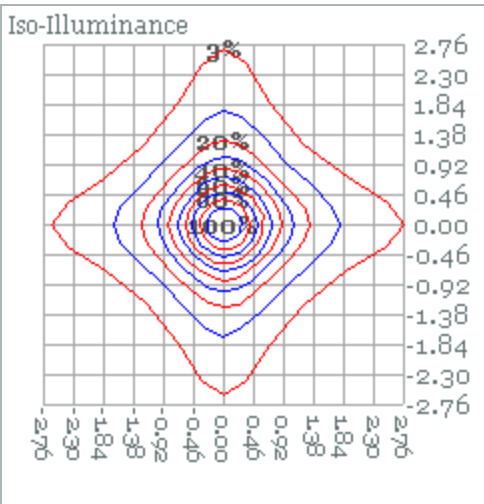

Light Distribution														
candela														900
														800
														700
														600
														500
														400
														300
														200
														100
														0
	90.0°	75.0°	60.0°	45.0°	30.0°	15.0°	0.0°	15.0°	30.0°	45.0°	60.0°	75.0°	90.0°	

Standard (VC-Strip 8x1 - All LEDs on) (110°)

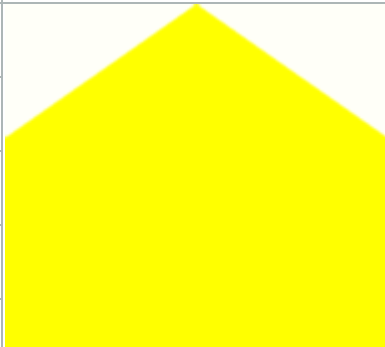m.	Ø 50%	110°	E (lux)	Efficacy
5	14.3		1	27.8 lumens per watt
10	28.6		0	Half-peak diameter
20	57.1		0	2.86 X distance(m)
30	85.7		0	Illuminance
50	142.8		0	20 / distance <sup>2</sup> (lux)
				Total Output
				60 (lumens)

