

Photometric Report

ELP-CL — 36 DEGREE (HIGH QUALITY MODE)

SPEC SHEET


MARTIN PROFESSIONAL R&D OPTICAL LABORATORY

GENERAL SPECIFICATIONS



Total Fixture Output: 5600 lm
Light Engine Output: 20 klm
Efficacy: 31 Lumen/Watt
Lens Option: 36° Lens
Zoomrange: 36°
CRI: 90
CQS: N/A
TM-30 Rf: 84.5
TM-30 Rg: 106.3
TLCI: 87
Color Temperature: Variable


MEASUREMENT

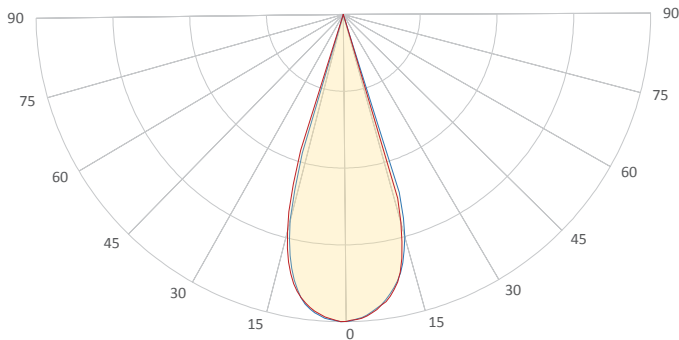

- Vertical - Horizontal

Catalog Number: 9045107780
Measured Output: 6098 lm
Measured Peak: 25554 cd
Consumed Power: 190 W
Efficacy: 32.1 Lumen/Watt
Beam Angle (50%): 33.9°
Field Angle (10%): 35.6°
Cutoff Angle (3%): 36°
Measurement Condition:
Ambient Temperature: 25 +/- 5C
AC Supply: 230V/50Hz

SPECTRAL DISTRIBUTION




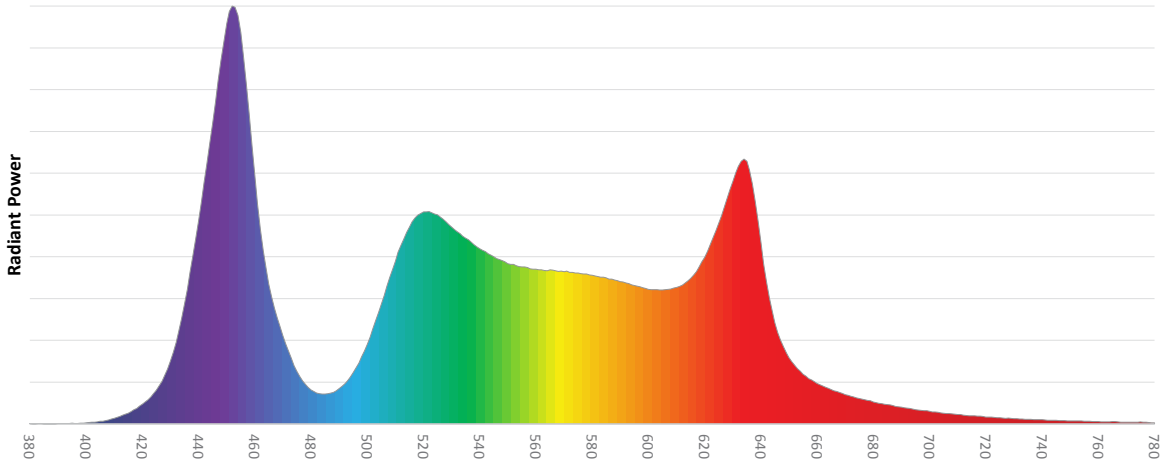


Photometric Report

ELP-CL — 36 DEGREE (HIGH QUALITY MODE)


SPEC SHEET

CHROMATICITY

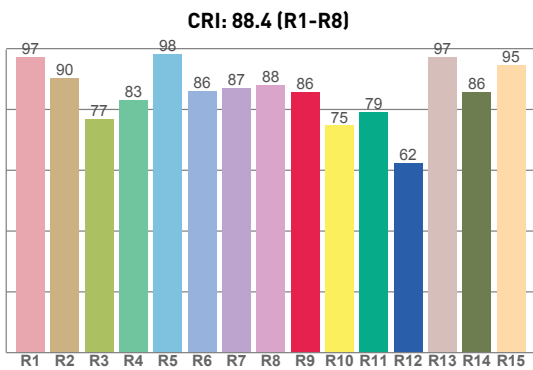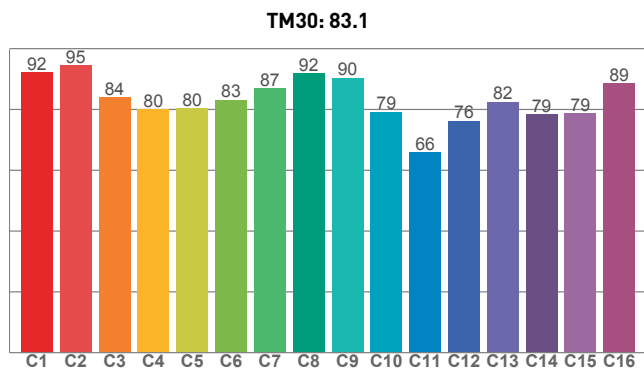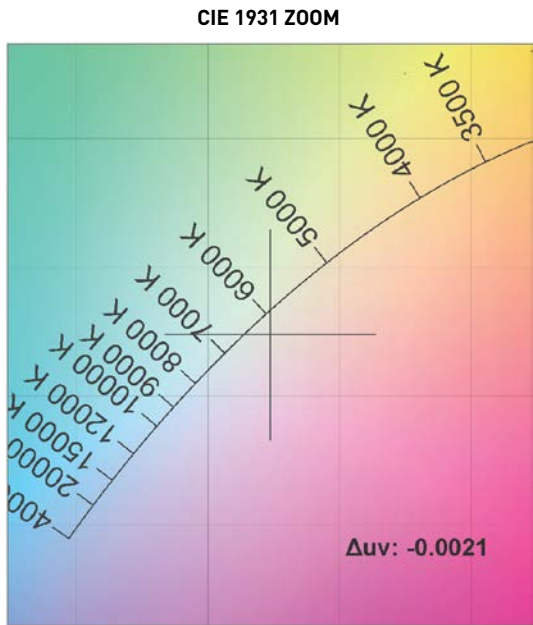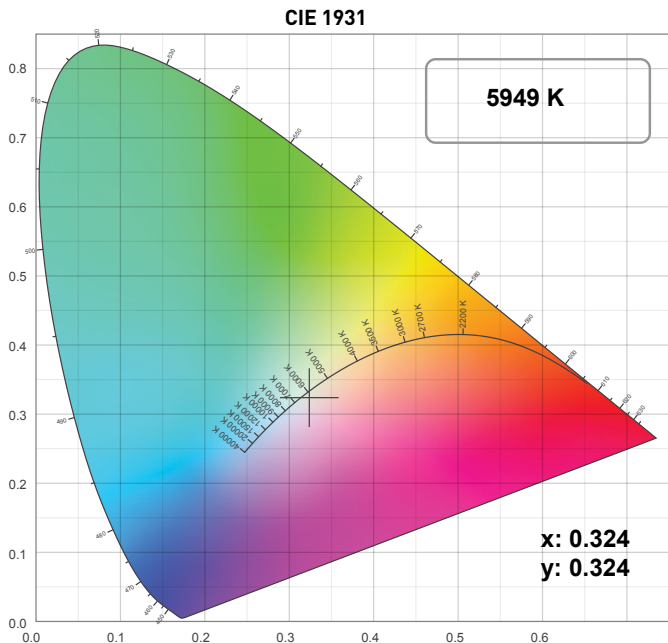

COLOR PARAMETERS

COLOR TEMPERATURE	COLOR RENDERING INDEX	RED COMPONENT	COLOR FIDELITY	COLOR GAMUT
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
5949 K	88.4	85.6	83.1	107.8

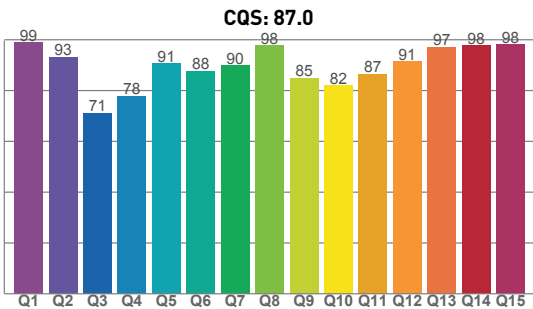

TELEVISION LIGHTING CONSISTENCY INDEX	COLOR QUALITY SCALE	COLOR COORDINATE CIE 1931	COLOR COORDINATE CIE 1931	COLOR COORDINATE CIE 1964	COLOR COORDINATE CIE 1964	COLOR DEVIATION FROM BLACK BODY
TLCI	CQS	x	y	u	v	Δuv
87	87.0	0.324	0.324	0.208	0.311	-0.0021

Photometric Report

ELP-CL — 36 DEGREE (HIGH QUALITY MODE)



SPEC SHEET

TM30



Rf 83.1
Fidelity index Rf

Rg 107.8
Gamut index Rg


Hue Bin	Rf	Graphic shifts (%)	
		Chroma	Hue
1	92	0%	-2%
2	95	-1%	1%
3	84	1%	8%
4	80	2%	11%
5	80	5%	8%
6	83	10%	4%
7	87	8%	-2%
8	92	1%	-3%
9	90	-5%	2%
10	79	-5%	10%
11	66	0%	19%
12	76	3%	14%
13	82	10%	10%
14	79	10%	6%
15	79	18%	-4%
16	89	5%	-3%

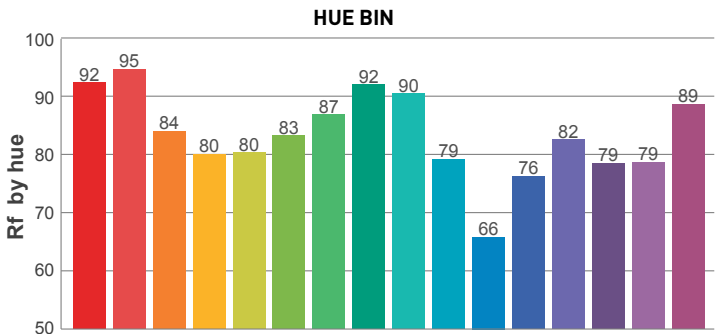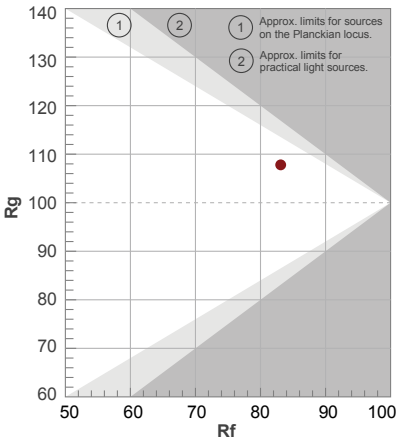

COLOR VECTOR GRAPHICS

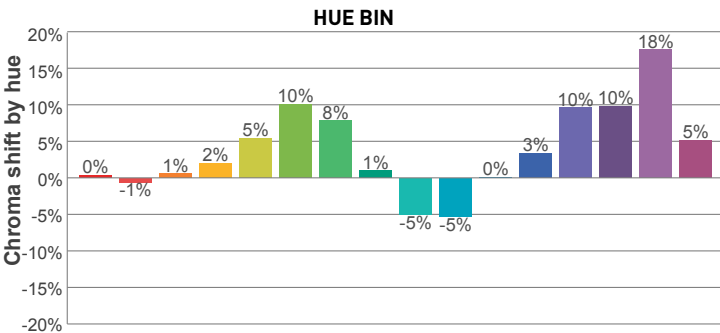

COLOR DISTORTION GRAPHICS

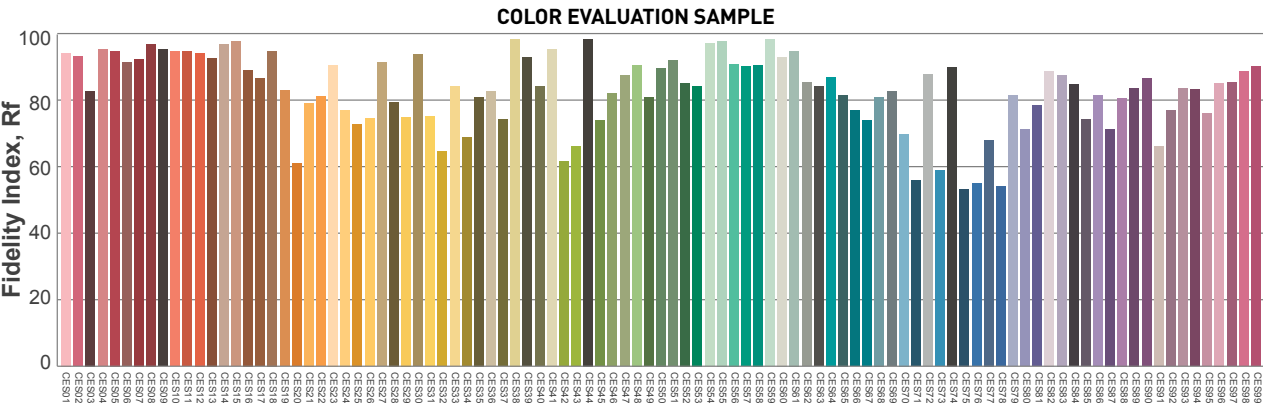


Photometric Report

ELP-CL — 36 DEGREE (HIGH QUALITY MODE)

SPEC SHEET

BEAM DETAILS

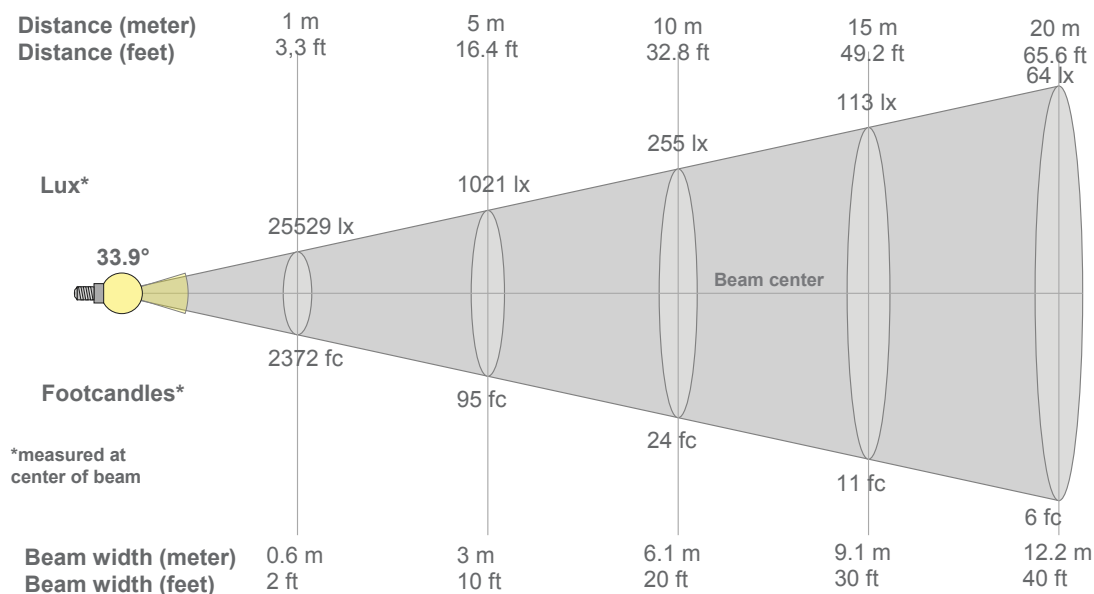


Beam width:
Beam luminous intensity formula:

$w = 0.6 * \text{distance}$
 $\text{lux} = 25529 / (\text{distance}^2)$ (where distance is in meters)
 $\text{fc} = 25529 / (\text{distance}^2)$ (where distance is in feet)

BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
25529lx	6382lx	2837lx	1596lx	1021lx	709lx	521lx	399lx	315lx	255lx	211lx	177lx	151lx	130lx	113lx	100lx	88lx	79lx	71lx	64lx
2371.7fc	592.9fc	263.5fc	148.2fc	94.9fc	65.9fc	48.4fc	37.1fc	29.3fc	23.7fc	19.6fc	16.5fc	14fc	12.1fc	10.5fc	9.3fc	8.2fc	7.3fc	6.6fc	5.9fc

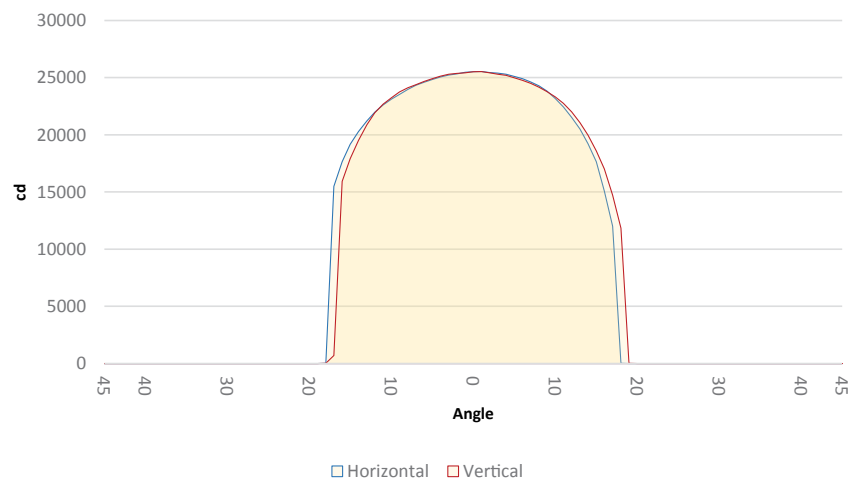

BEAM ANGLE 50%	FIELD ANGLE 10%	CUTOFF ANGLE 3%
33.9°	35.6°	36°