





RUSH MH 6 Wash CTPhotometrics

Standard (100% Cold + Warm White) , Zoom at M (12.5°)

Distance (m.)	2	4	6	8	10
1/10 peak	0.4	0.9	1.3	1.8	2.2
1/2 peak	0.3	0.6	0.9	1.2	1.5
Illuminance (lux)	24500	6125	2722	1531	980

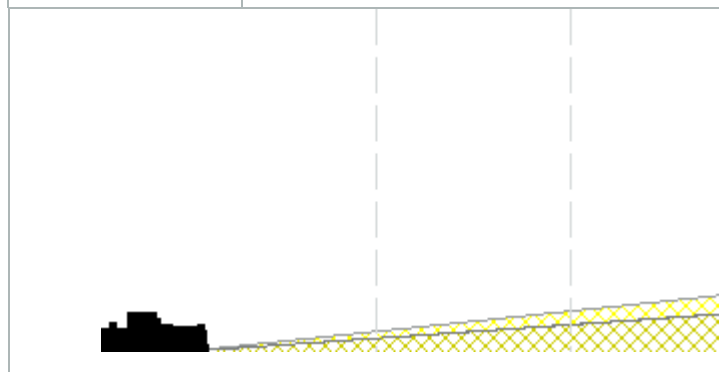


Efficacy
14.6 lumens per watt
Half-peak diameter
0.15 X distance(m)
One-tenth peak diameter
0.22 X distance(m)
Illuminance
98000 / distance ² (lux)
Total Output
2000 (lumens)

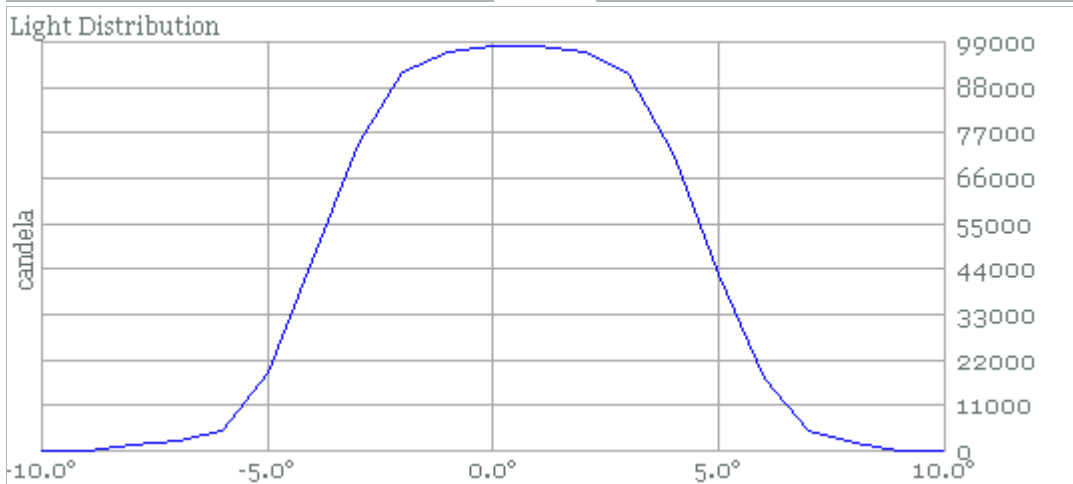
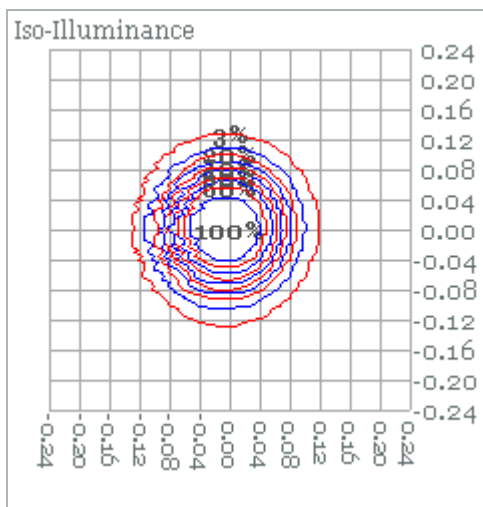
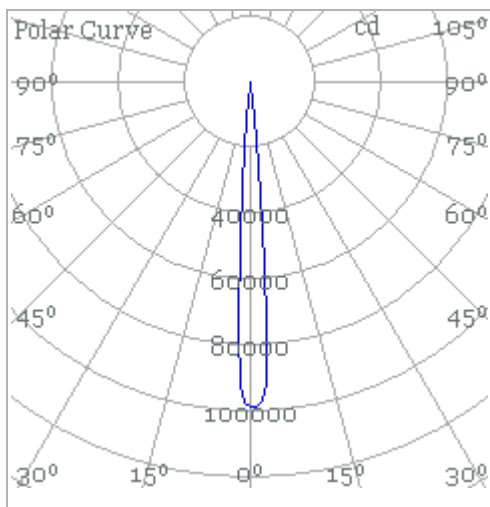


Standard (100% Cold + Warm White) , Zoom at M (75°)

Distance (m.)	0.5	1	1.5	2	2.5
1/10 peak	0.8	1.5	2.3	3.1	3.8
1/2 peak	0.4	0.8	1.2	1.5	1.9
Illuminance (lux)	25200	6300	2800	1575	1008

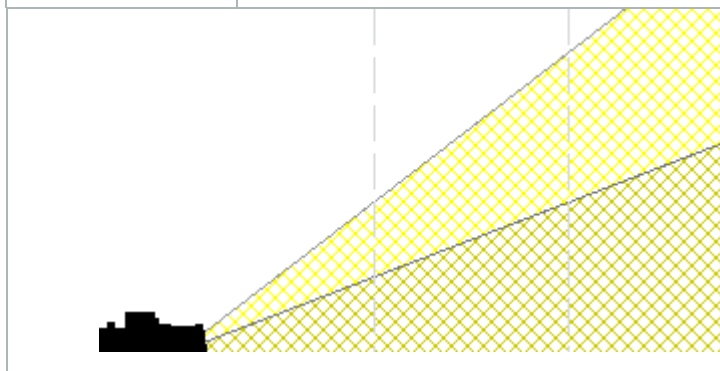


Efficacy
24.5 lumens per watt
Half-peak diameter
0.77 X distance(m)
One-tenth peak diameter
1.53 X distance(m)
Illuminance
$6300 / \text{distance}^2$ (lux)
Total Output
3300 (lumens)

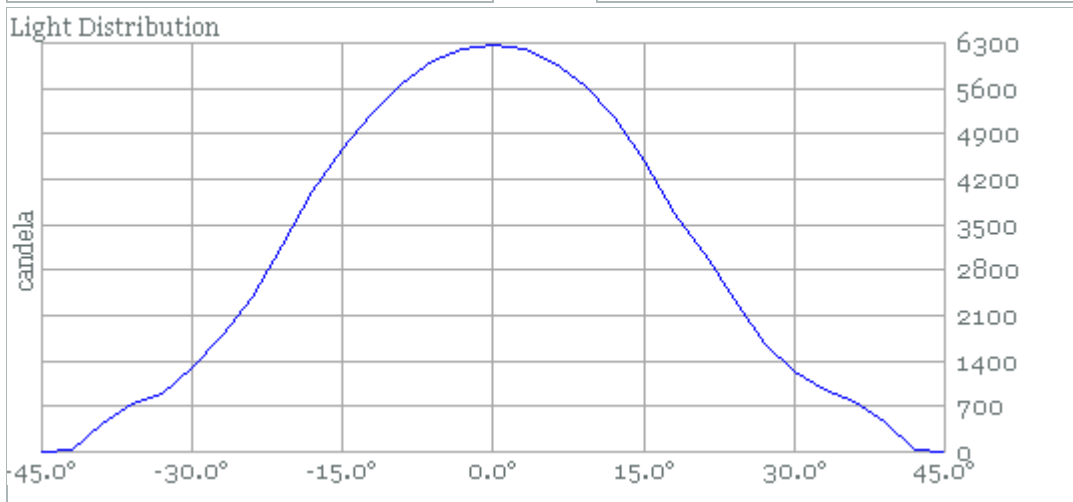
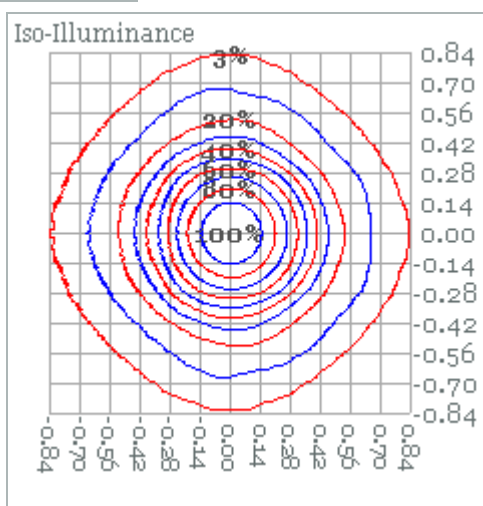
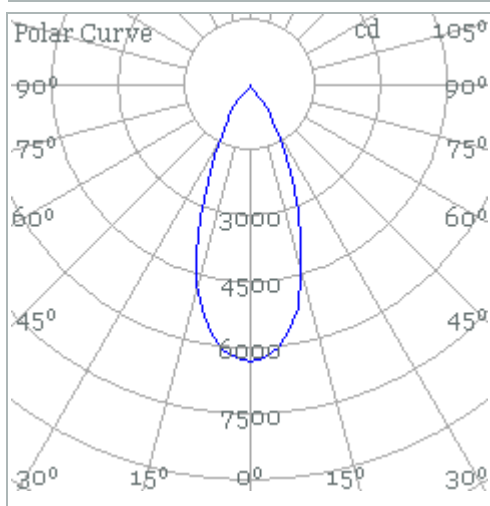


Standard (100% Cold White) , Zoom at M (12.5°)

Distance (m.)	2	4	6	8	10
1/10 peak	0.4	0.9	1.3	1.8	2.2
1/2 peak	0.3	0.6	0.9	1.2	1.5
Illuminance (lux)	16250	4062	1806	1016	650

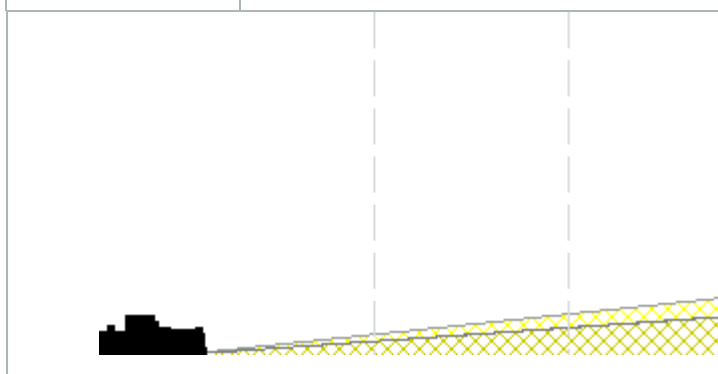


Efficacy
17.6 lumens per watt
Half-peak diameter
0.15 X distance(m)
One-tenth peak diameter
0.22 X distance(m)
Illuminance
$65000 / \text{distance}^2$ (lux)
Total Output
1300 (lumens)

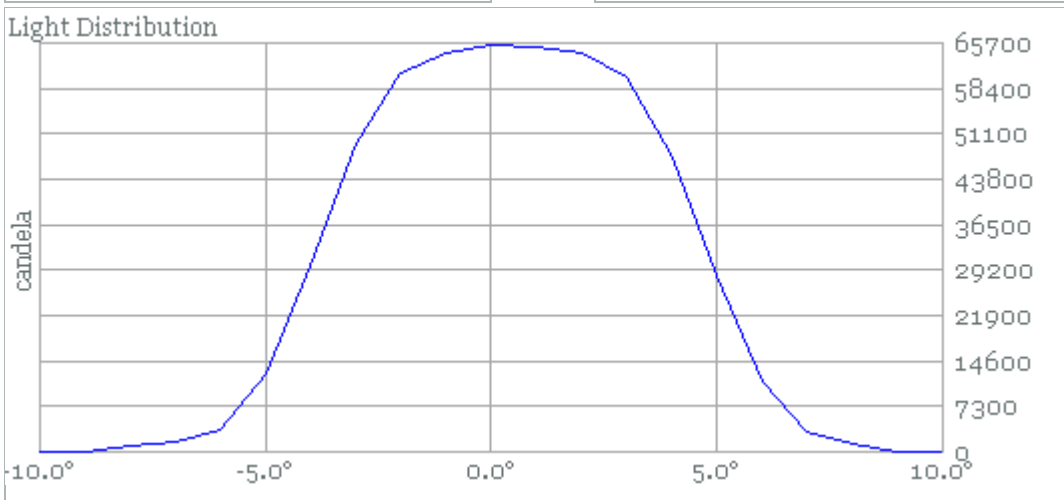
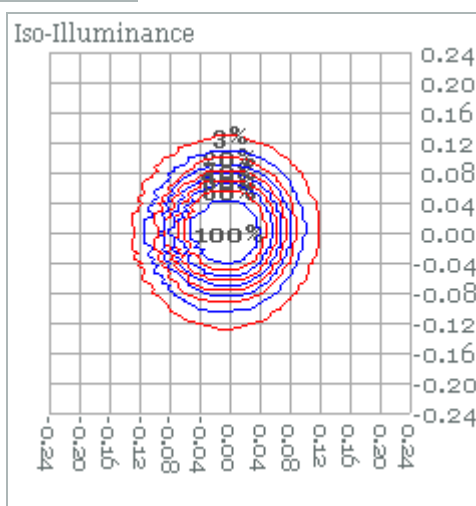
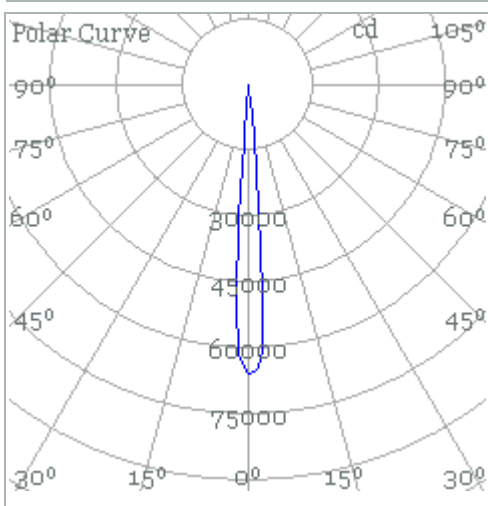


Standard (100% Cold White) , Zoom at M (75°)

Distance (m.)	0.5	1	1.5	2	2.5
1/10 peak	0.8	1.5	2.3	3.1	3.8
1/2 peak	0.4	0.8	1.2	1.5	1.9
Illuminance (lux)	16800	4200	1867	1050	672

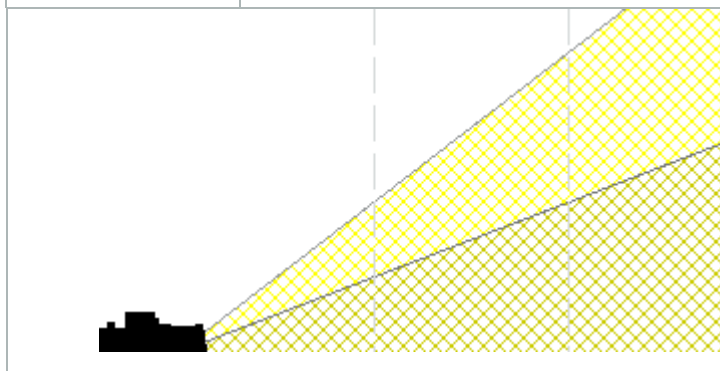


Efficacy
29.4 lumens per watt
Half-peak diameter
0.77 X distance(m)
One-tenth peak diameter
1.53 X distance(m)
Illuminance
$4200 / \text{distance}^2$ (lux)
Total Output
2200 (lumens)

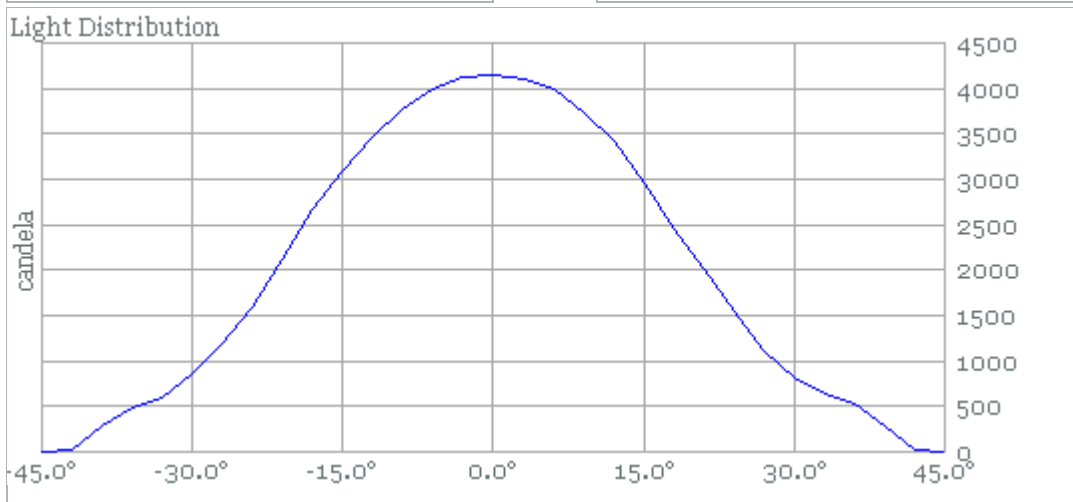
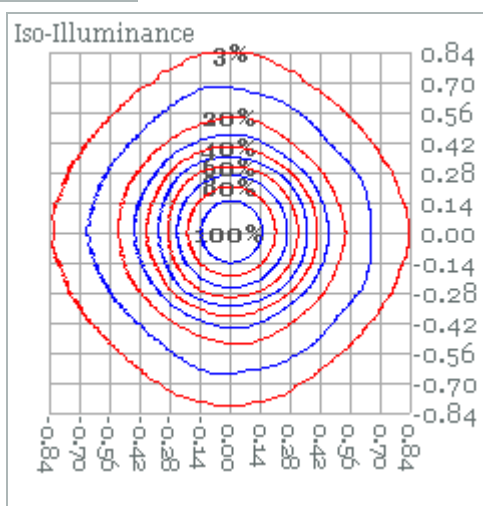
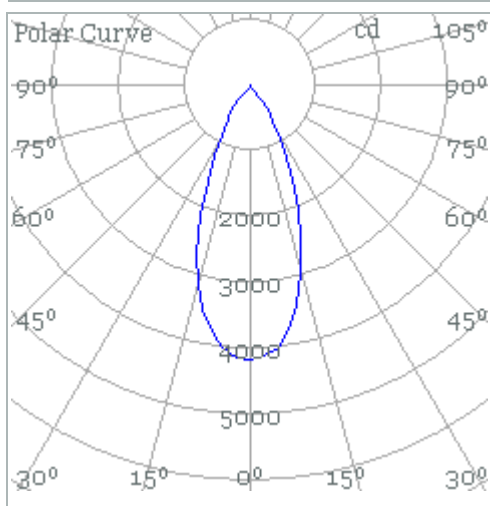


Standard (100% Warm White) (12.5°)


Distance (m.)	1.5	3	4.5	6	7.5
1/10 peak	0.3	0.7	1.0	1.3	1.6
1/2 peak	0.2	0.5	0.7	0.9	1.1
Illuminance (lux)	16444	4111	1827	1028	658

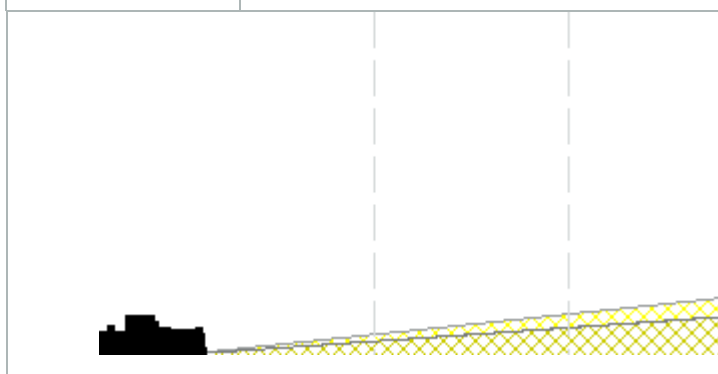

Efficacy
10 lumens per watt
Half-peak diameter
0.15 X distance(m)
One-tenth peak diameter
0.22 X distance(m)
Illuminance
$37000 / \text{distance}^2$ (lux)
Total Output
740 (lumens)

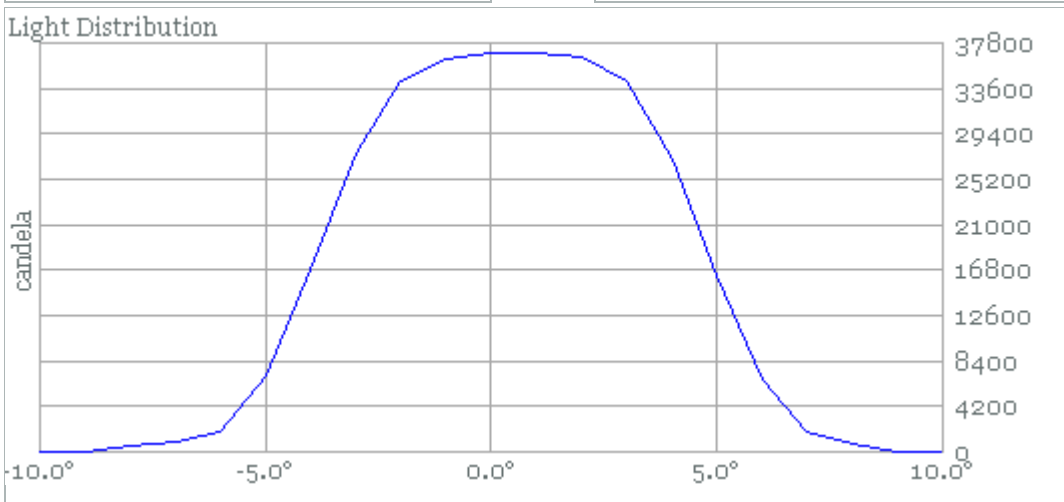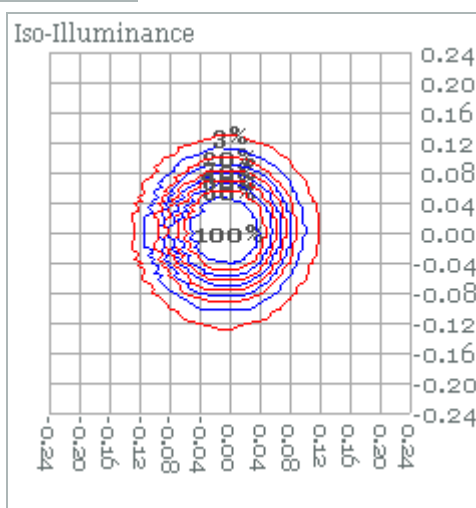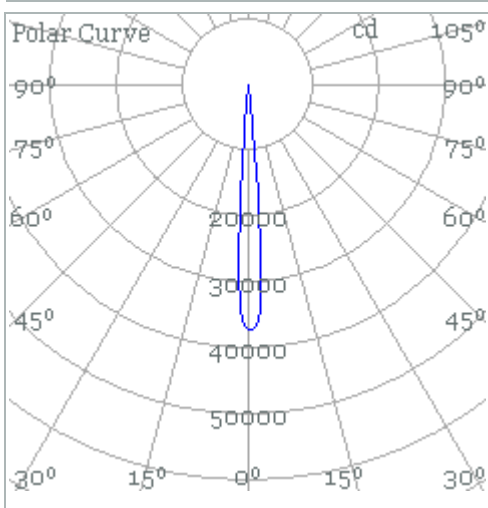

Standard (100% Warm White) , Zoom at M (74°)

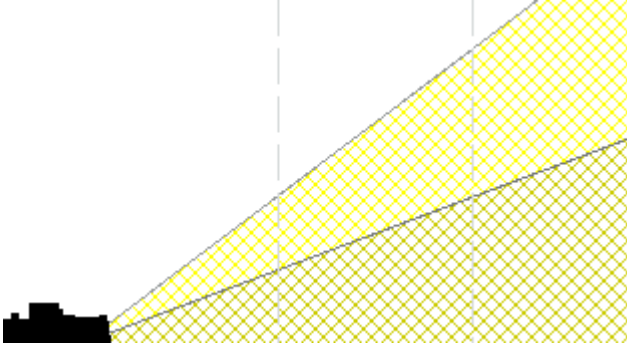Distance (m.)	0.5	1	1.5	2	2.5	Efficacy
1/10 peak	0.8	1.5	2.3	3.0	3.8	16.6 lumens per watt
1/2 peak	0.4	0.8	1.1	1.5	1.9	Half-peak diameter
Illuminance (lux)	9600	2400	1067	600	384	0.75 X distance(m)
						One-tenth peak diameter
						1.51 X distance(m)
						Illuminance
						$2400 / \text{distance}^2$ (lux)
						Total Output
						1200 (lumens)

