


# Photometric Report

VDO Sceptron XB 1000mm – With Blade Lens Installed


MARTIN PROFESSIONAL R&D OPTICAL LABORATORY

## GENERAL SPECIFICATIONS

Total Fixture Output:	1800 lm
Efficacy:	60 lm/W
Lens Option:	Blade Lens
Beam Angle Horizontal (50%):	15.8 °
Field Angle Horizontal (10%):	31.3 °
Cutoff Angle Horizontal (3%):	58 °
CRI:	78+
CQS:	74+
TM-30 Rf:	77+
TM-30 Rg:	92+
TLCI:	61+
Color Temperature:	6500 K

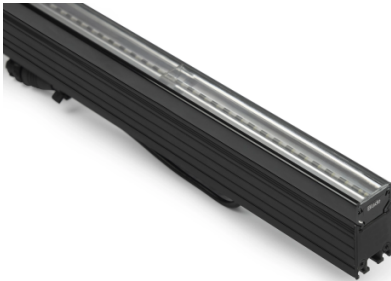


## SAMPLE MEASUREMENT

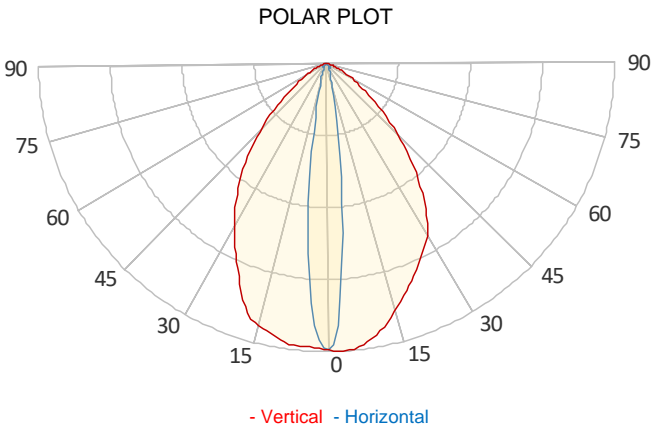

Catalog Number:	MAR-91616134
Measured Output:	1822 lm
Measured Peak:	4080 cd
Consumed Power:	30 W
Efficacy:	60.7 lm/W

Beam Angle Horizontal (50%):	15.8 °
Field Angle Horizontal (10%):	31.3 °
Cutoff Angle Horizontal (3%):	58 °





Measurement Condition:	
Ambient Temperature:	25 ° +/- 5 ° C
DC Supply:	48V
Fan Mode:	N/A
Fixture Warm-up Time:	30 minutes

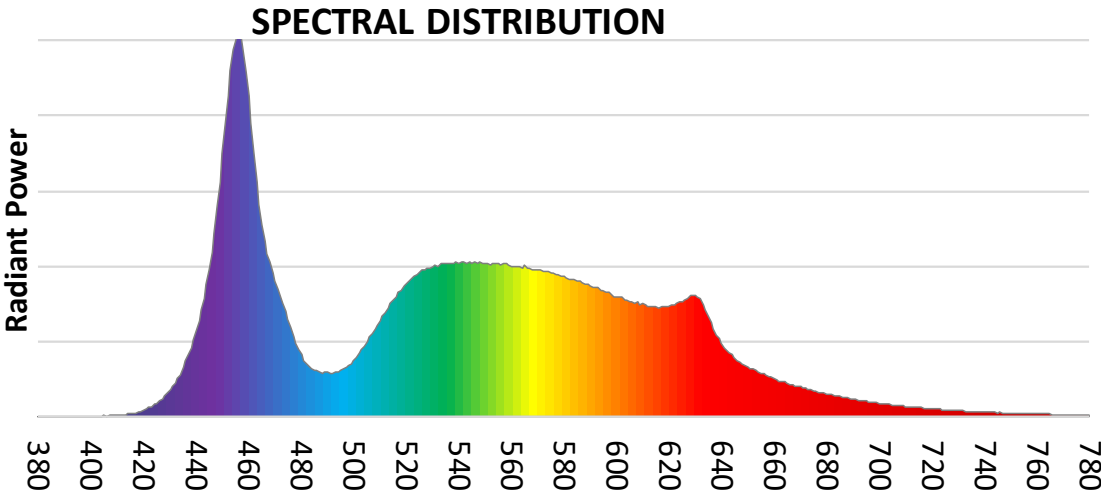

# Photometric Report


VDO Sceptron XB 1000mm – With Blade Lens Installed

## CHROMATICITY

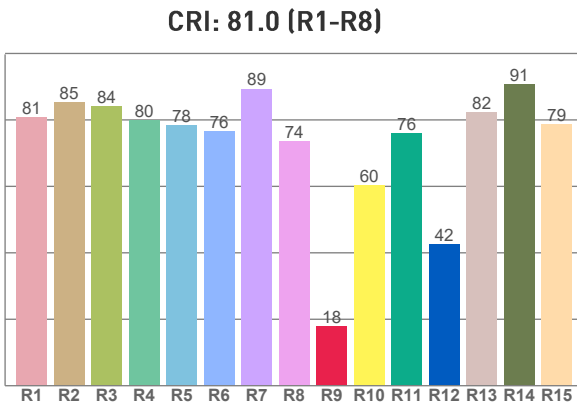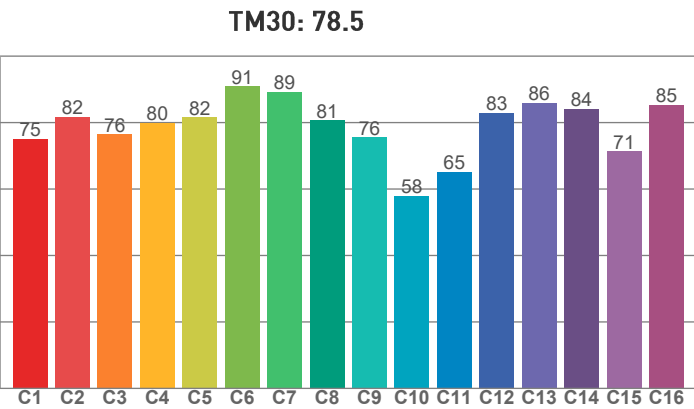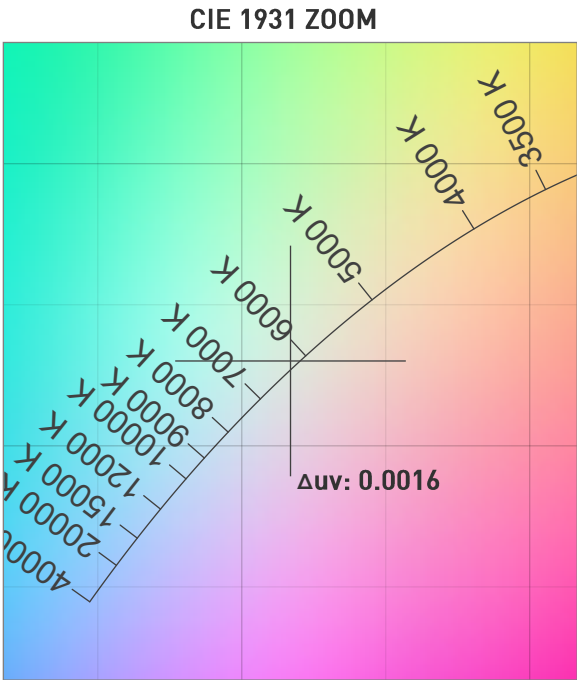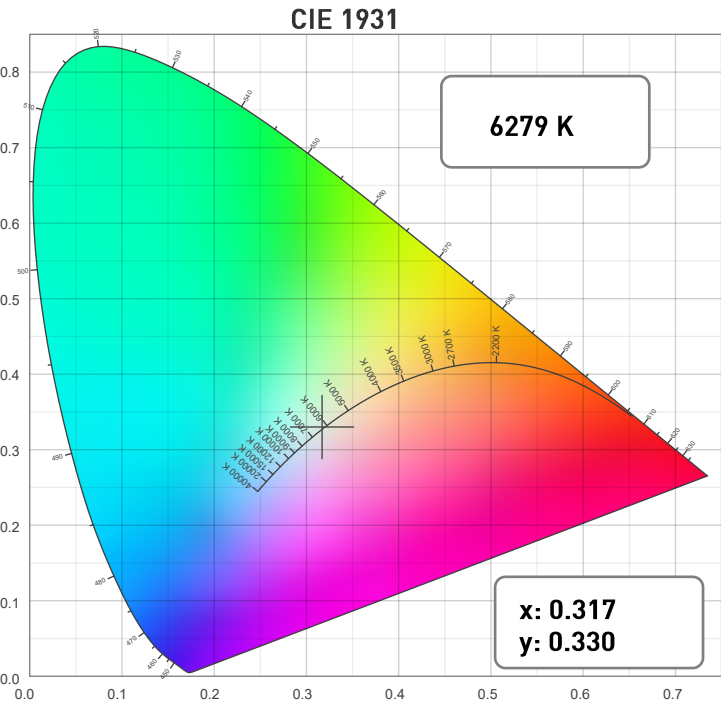

### COLOR PARAMETERS

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
6279 K	81.0	18.0	78.5	93.8

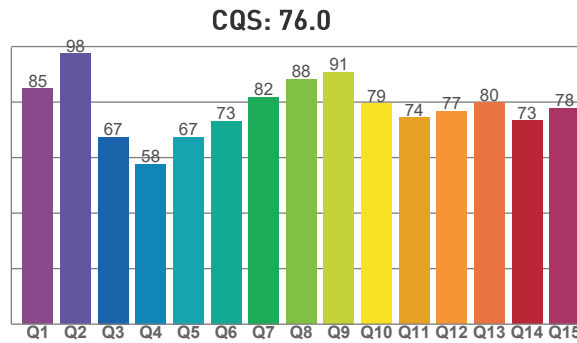

Television Lighting Consistency Index	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate CIE 1964	Color Coordinate CIE 1964	Color Deviation from Black Body
TLCI	CQS	x	y	u	v	Δuv
61+	76.0	0.317	0.330	0.200	0.313	0.0016

# Photometric Report

## VDO Sceptron XB 1000mm – With Blade Lens Installed

TM30



Rf 78.5

Fidelity index Rf



Rg 93.8

Gamut index Rg


Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	75	-13%	0%
2	82	-8%	7%
3	76	-5%	12%
4	80	0%	12%
5	82	-2%	5%
6	91	0%	-2%
7	89	-5%	-4%
8	81	-11%	2%
9	76	-14%	17%
10	58	-8%	25%
11	65	2%	22%
12	83	6%	10%
13	86	10%	0%
14	84	5%	-7%
15	71	9%	-24%
16	85	-6%	-6%

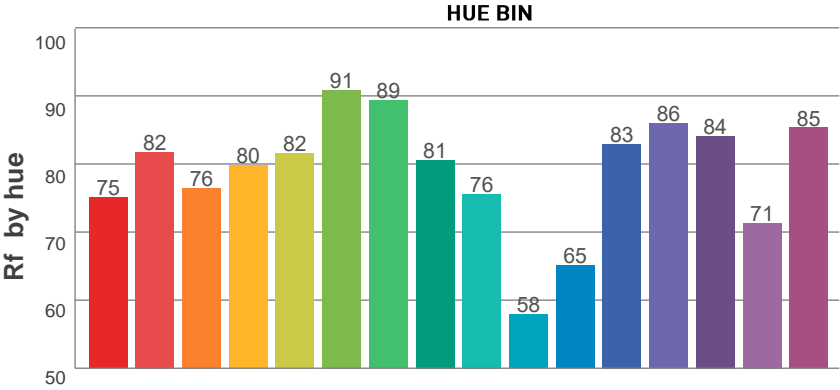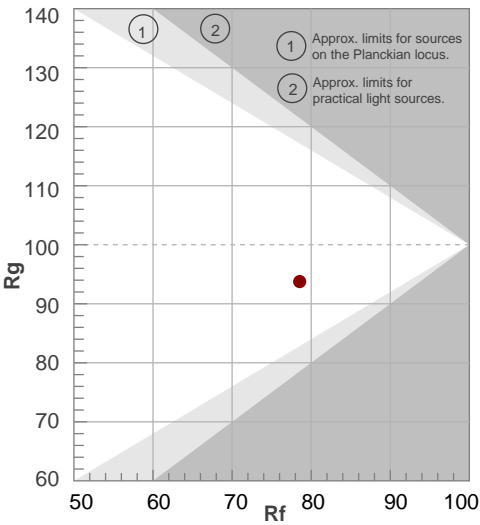

COLOR VECTOR GRAPHICS

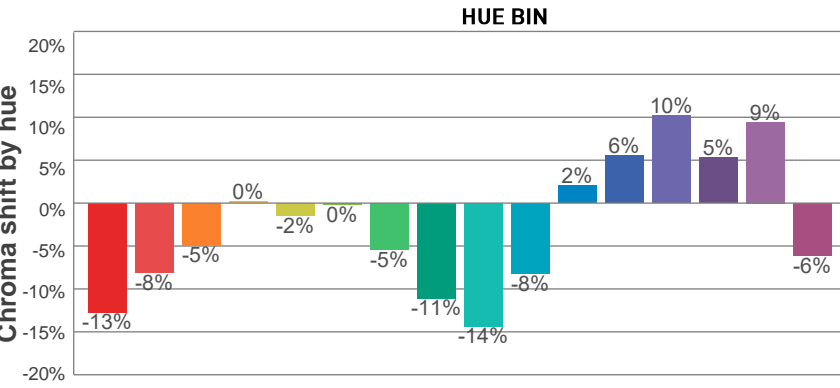


COLOR DISTORTION GRAPHICS

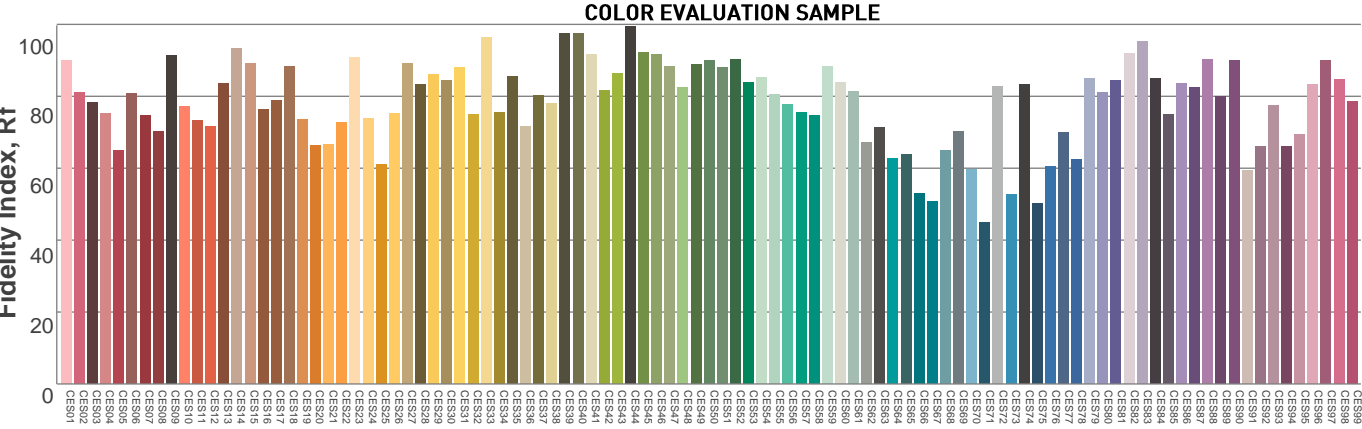

# Photometric Report


## VDO Sceptron XB 1000mm – With Blade Lens Installed

### BEAM DETAILS

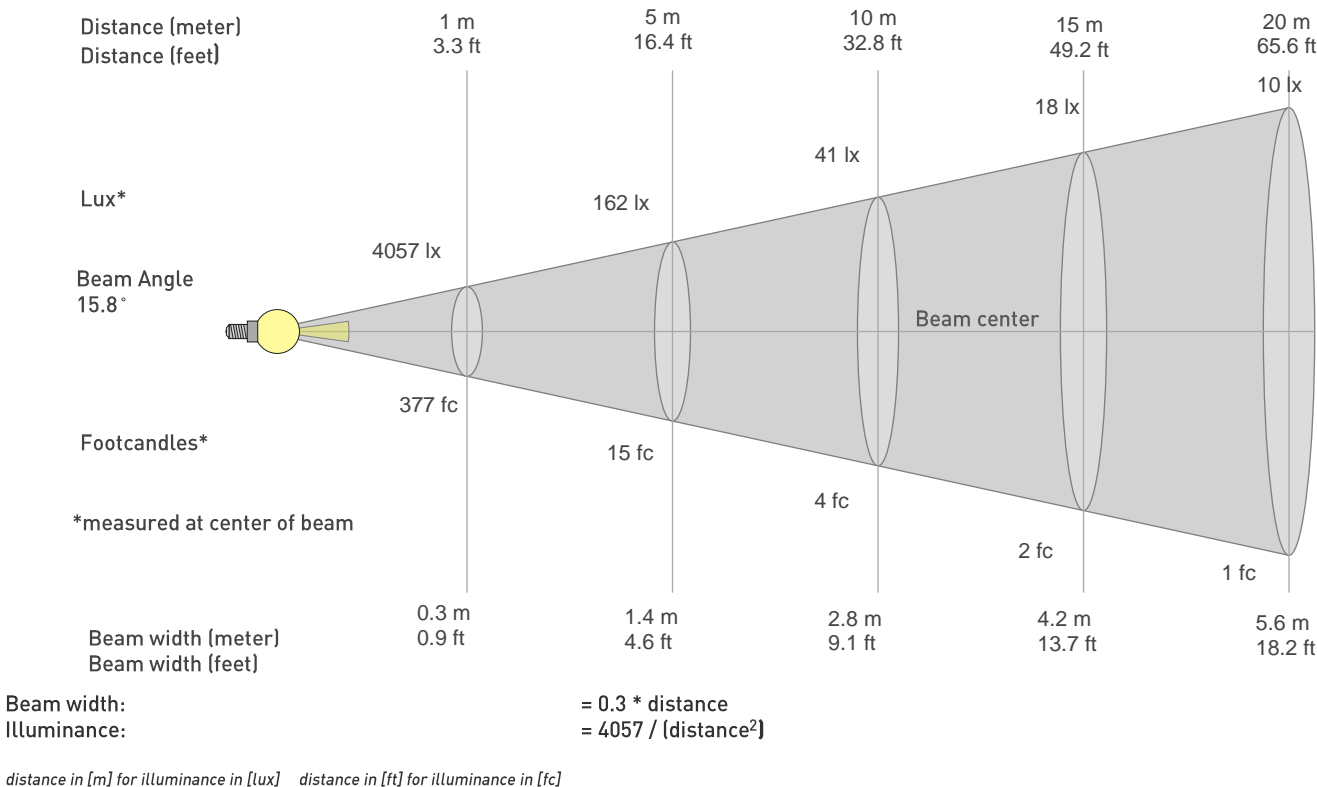

### BEAM ILLUMINANCE FROM 1-20M

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4057lx	1014lx	451lx	254lx	162lx	113lx	83lx	63lx	50lx	41lx	34lx	28lx	24lx	21lx	18lx	16lx	14lx	13lx	11lx	10lx
377fc	94.2fc	41.9fc	23.6fc	15.1fc	10.5fc	7.7fc	5.9fc	4.7fc	3.8fc	3.1fc	2.6fc	2.2fc	1.9fc	1.7fc	1.5fc	1.3fc	1.2fc	1fc	0.9fc

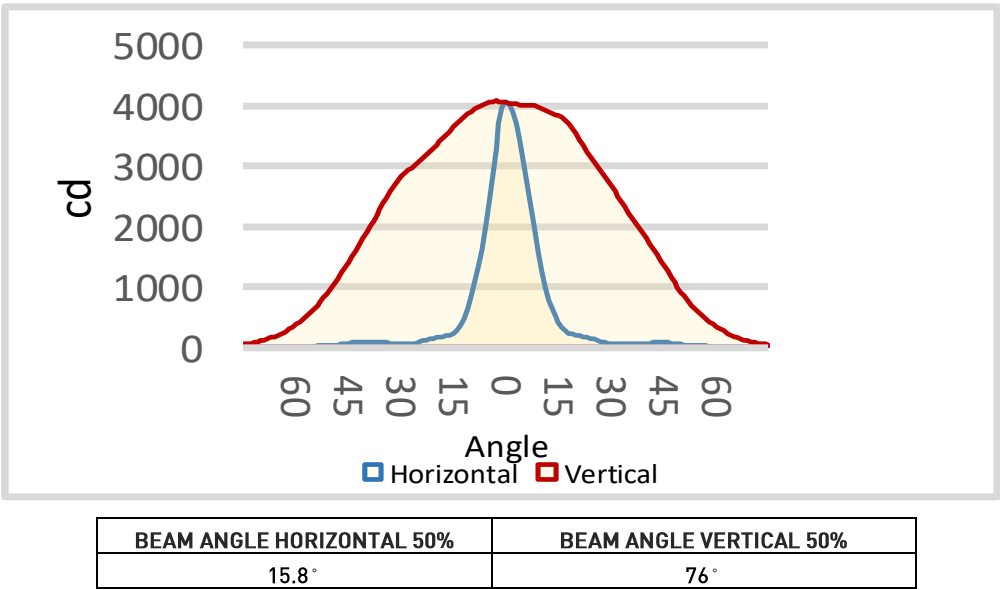

# Photometric Report

## VDO Sceptron XB 1000mm – With Blade Lens Installed

### TEST INFORMATION

Test date:	From March 20, 2025, to March 21, 2025
Date of receipt samples:	March 20, 2025
Quantity of receipt samples:	2 units per model

### EQUIPMENT LIST

ID	Instrument	Model	Cal. date	Next cal. Date
AC Power Meter	EF-I-0287	PF9811	2025.03.07	2025.04.06
AC Power Meter	EF-I-1002	PF2010	2025.03.07	2025.04.06
Photometric colorimetric electric system (2-meter sphere)	EF-I-900	HASS 2000	Before used	Before used
21V/3.9289A standard lamp	EF-I-963	D204	2025.01.11	2026.01.10
Goniophotometer	EF-I-902	GO-R5000	2025.03.07	2025.04.06
Wireless temperature transmitter	EF-I-958	DWRP-B (0)	2025.03.07	2025.04.06

### REFERENCE STANDARDS OR METHODS

ANSI/NEMA/ ANSLG C78.377-2017	Specifications for the Chromaticity of Solid-State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

# Photometric Report

VDO Sceptron XB 1000mm – With Blade Lens Installed

## TEST CONDUCTED AND METHOD

### Ambient Condition

The ambient temperature in which measurements are being taken was maintained at  $25 \pm 2$  °C, the air flow around the sample(s) being tested did not affect the performance.

### Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within 0.2 percent under load.

### Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

### Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (9% confidence interval,  $k=2$ ).

### Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

10 samples were measured as customer required.

### Total Luminous Flux Measurement Method

Total luminous flux was measured by both sphere-spectroradiometer system and goniophotometer.

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the total luminous flux was calculated from these by software automatically.

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the total luminous flux was calculated from the intensity data by software automatically.

1 sample was measured by sphere method, and 1 sample was measured by goniophotometer method.

Correction factor (self-absorption) has been considered when doing measurement.

### Luminous Intensity Distribution Measurement Method

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the kinds of graph were generated by software automatically.

1 sample was measured as customer required.