

Photometric Report

EXTERIOR WASH PRO XL QUAD 6500K – Medium

LM-79-08 Compliant


GENERAL SPECIFICATIONS

Total Fixture Output:	9669 lm
Light Engine Output:	13845 lm
Efficacy:	39.3 lm/W
Lens Option:	Medium
Beam Angle H (50%):	15 °
Beam Angle V (50%):	15 °
CRI:	70+
CQS:	75.3
TM-30 Rf:	74.4
TM-30 Rg:	99.9
TLCI:	64
Color Temperature:	6500 K



SAMPLE MEASUREMENT

POLAR PLOT

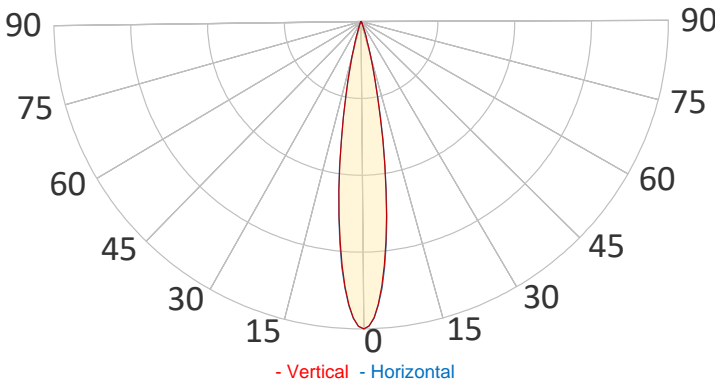


Catalog Number:	MAR-90590004
Measured Output:	9669 lm
Measured Peak:	90271 cd
Consumed Power:	247 W
Efficacy:	39.3 lm/W

Beam Angle H (50%):	16.9 °
Beam Angle V (50%):	16.9 °

Measurement Condition:	
Ambient Temperature:	25 ° +/- 5 ° C
AC Supply:	230V/50Hz
Fan Mode:	No Fan
Fixture Warm-up Time:	30 minutes



SPECTRAL DISTRIBUTION

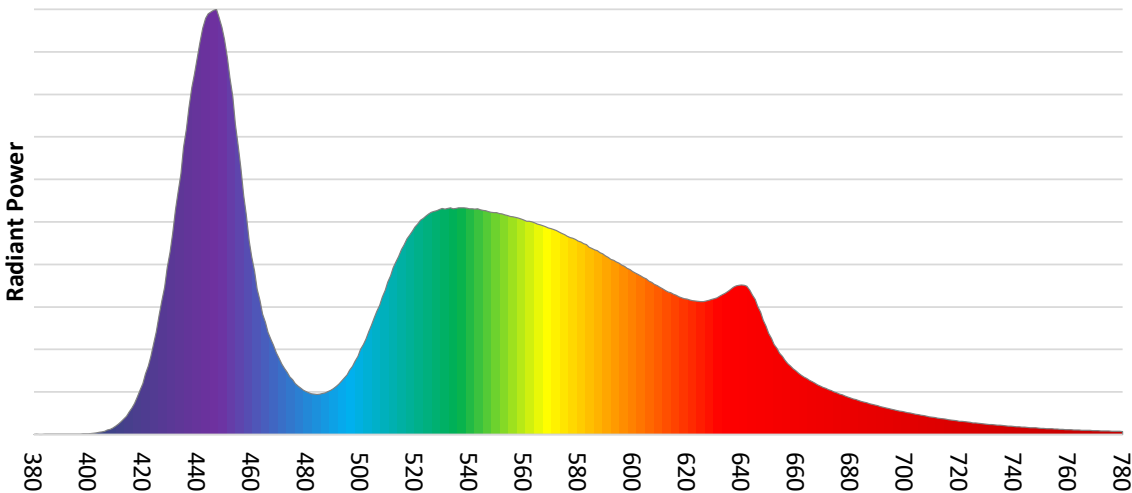


Photometric Report

EXTERIOR WASH PRO XL QUAD 6500K – Medium


CHROMATICITY

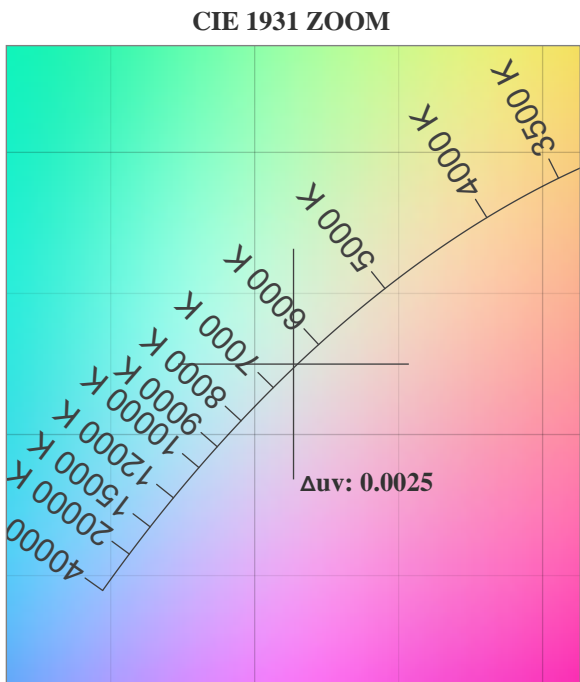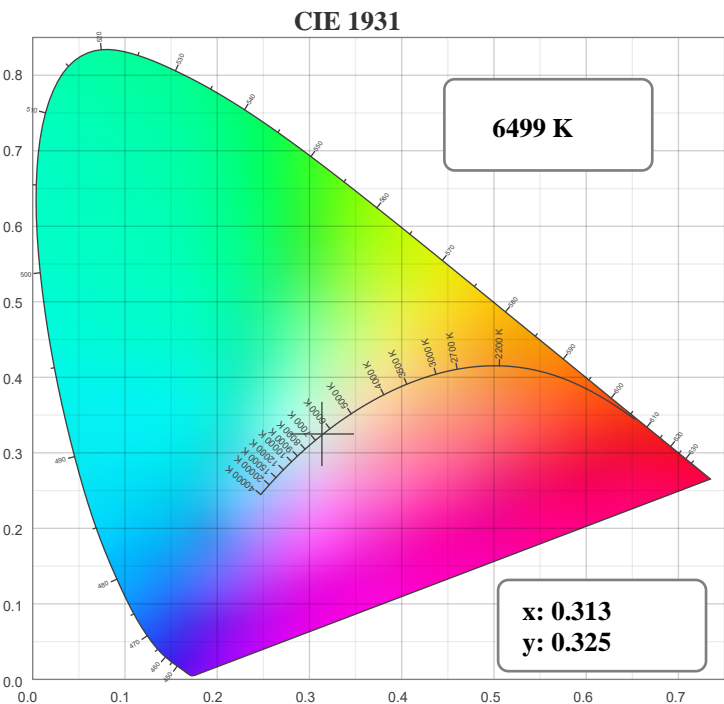

TM30: 74.4

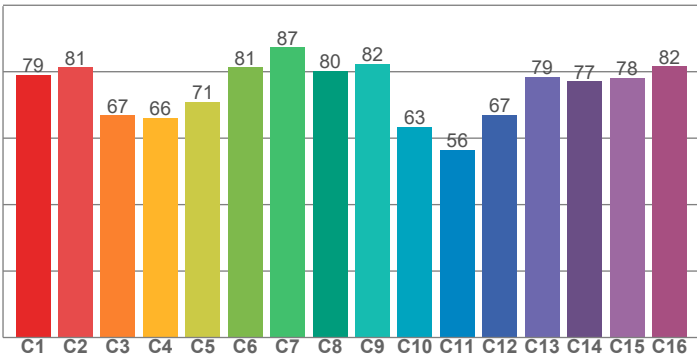


CRI: 75.5 (R1-R8)

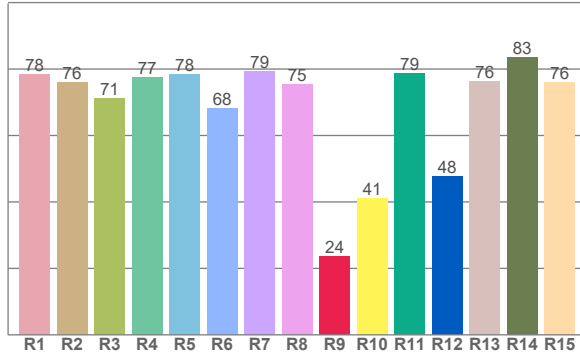

COLOR PARAMETERS

Color Temperature	Color Rendering Index	Red Component	Color Fidelity	Color Gamut
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg
6499 K	75.5	23.7	74.4	99.9

CQS: 75.3

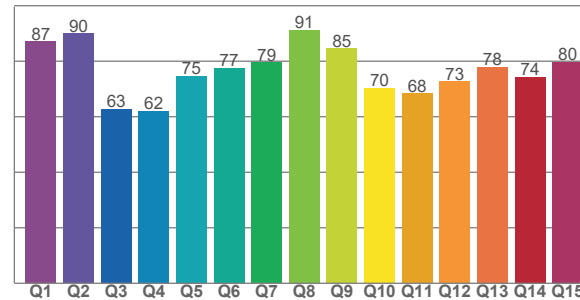

Television Lighting Consistency Index	Color Quality Scale	Color Coordinate CIE 1931	Color Coordinate CIE 1931	Color Coordinate CIE 1964	Color Coordinate CIE 1964	Color Deviation from Black Body
TLCI	CQS	x	y	u	v	Δuv
64	75.3	0.313	0.325	0.200	0.311	0.0025

Photometric Report

EXTERIOR WASH PRO XL QUAD 6500K – Medium

TM30


Rf 74.4

Fidelity index Rf


Rg 99.9

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-10%	-5%
2	81	-10%	6%
3	67	-5%	19%
4	66	4%	21%
5	71	14%	14%
6	81	13%	0%
7	87	4%	-7%
8	80	-6%	-10%
9	82	-15%	0%
10	63	-14%	18%
11	56	-5%	27%
12	67	4%	22%
13	79	13%	13%
14	77	13%	1%
15	78	14%	-14%
16	82	0%	-11%

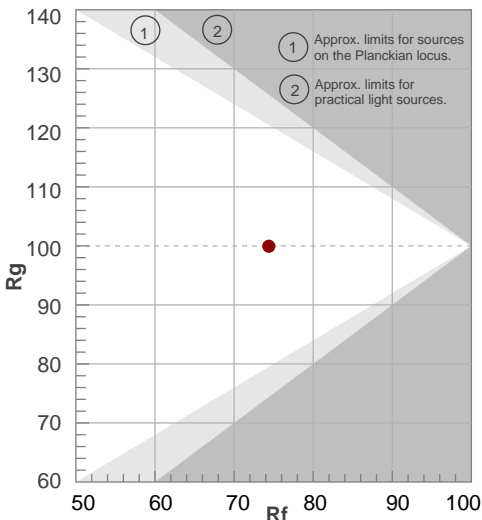


HUE BIN

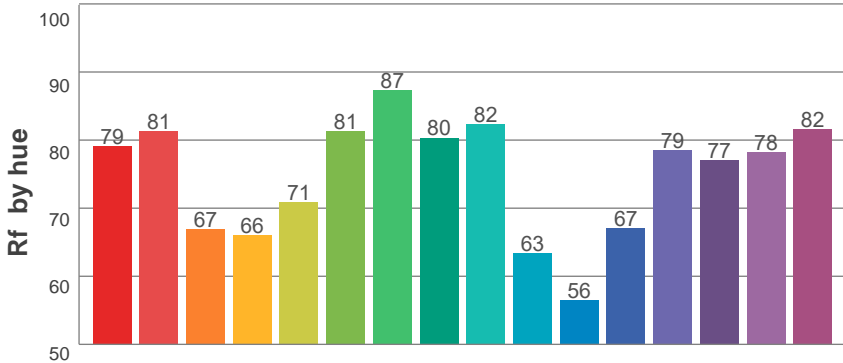

COLOR VECTOR GRAPHICS

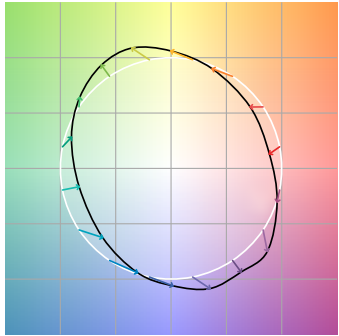


HUE BIN

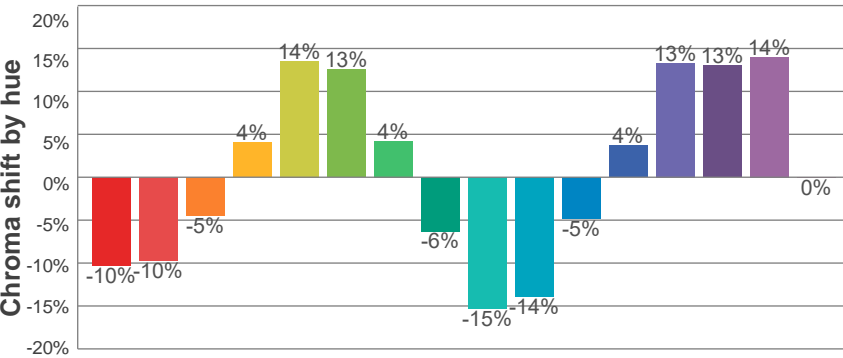

COLOR DISTORTION GRAPHICS



COLOR EVALUATION SAMPLE

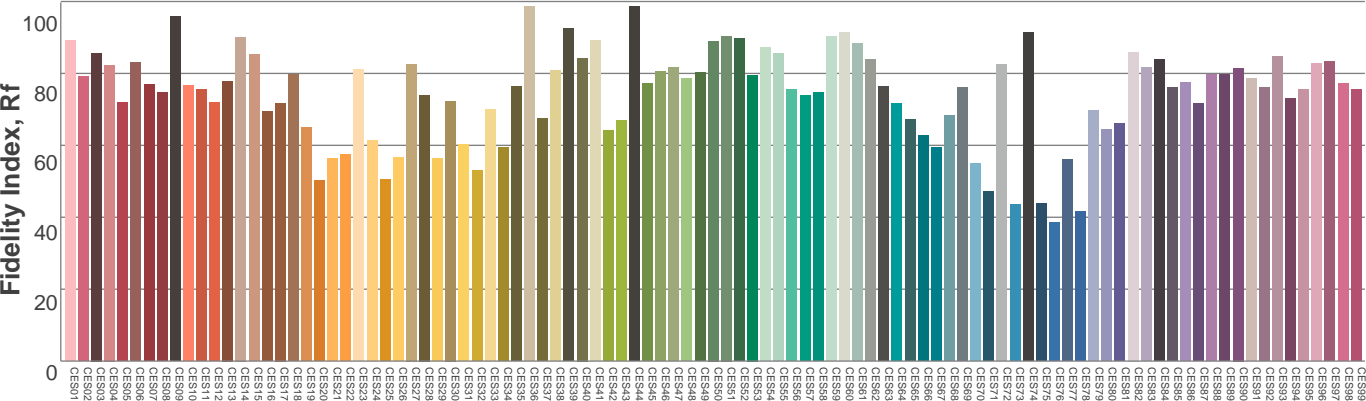

EXTERIOR WASH PRO XL QUAD 6500K – Medium


The diagram illustrates the beam spread and illuminance of a 17-degree beam light at various distances. The beam originates from a light source on the left and expands as it travels to the right. Vertical lines mark distances of 1 m, 5 m, 10 m, 15 m, and 20 m. Horizontal lines indicate the beam width at each distance. The beam is divided into five sections, each with a specific illuminance value (lx) and footcandle value (fc). The beam width is also given in both meters and feet. The beam center is marked with a horizontal line.

Distance (meter)	Distance (feet)	Illuminance (lx)	Illuminance (fc)	Beam width (meter)	Beam width (feet)
1 m	3.3 ft	87605 lx	8139 fc	0.3 m	1 ft
5 m	16.4 ft	3504 lx	326 fc	1.5 m	4.9 ft
10 m	32.8 ft	876 lx	81 fc	3 m	9.8 ft
15 m	49.2 ft	389 lx	36 fc	4.5 m	14.7 ft
20 m	65.6 ft	219 lx	20 fc	6 m	19.6 ft

Beam width: $= 0.3 \times \text{distance}$
 Illuminance: $= 87605 / (\text{distance}^2)$

distance in [m] for illuminance in [lux] distance in [ft] for illuminance in [fc]

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
87605lx	21901lx	9734lx	5475lx	3504lx	2433lx	1788lx	1369lx	1082lx	876lx	724lx	608lx	518lx	447lx	389lx	342lx	303lx	270lx	243lx	219lx
8138.7fc	2034.7fc	904.3fc	508.7fc	325.5fc	226.1fc	166.1fc	127.2fc	100.5fc	81.4fc	67.3fc	56.5fc	48.2fc	41.5fc	36.2fc	31.8fc	28.2fc	25.1fc	22.5fc	20.3fc

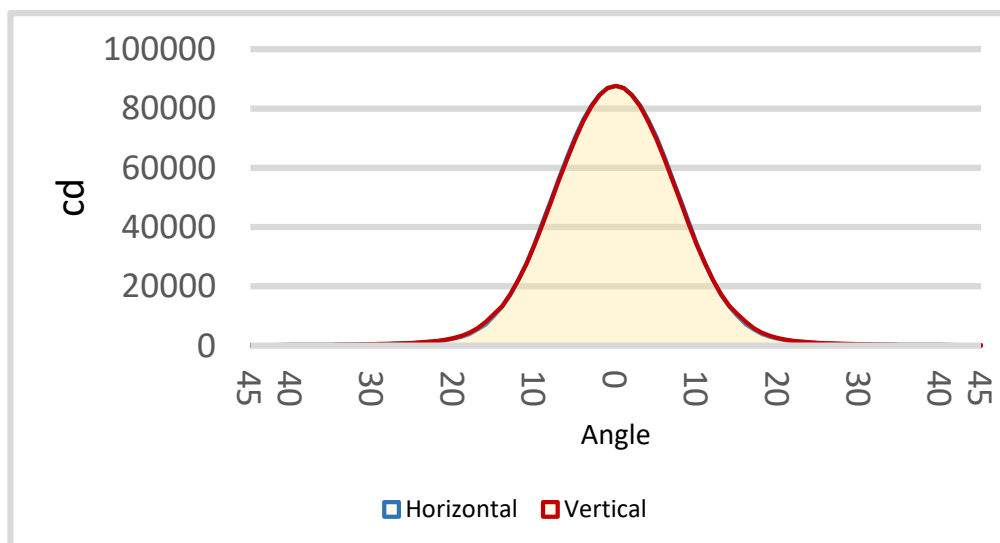

BEAM ANGLE H 50%	BEAM ANGLE V 50%
16.9°	16.9°

Photometric Report

EXTERIOR WASH PRO XL QUAD 6500K – Medium

TEST INFORMATION

Test date:	From February 13, 2024, to February 21, 2024
Date of receipt samples:	February 21, 2024
Quantity of receipt samples:	1 unit per model

EQUIPMENT LIST

ID	Instrument	Model	Cal. date	Next cal. Date
AC Power Meter	EF-I-0287	PF9811	2024.02.08	2024.03.07
AC Power Meter	EF-I-1002	PF2010	2024.02.08	2024.03.07
Photometric colorimetric electric system (2-meter sphere)	EF-I-900	HASS 2000	Before used	Before used
21V/3.9289A standard lamp	EF-I-963	D204	2023.04.11	2024.04.10
Goniophotometer	EF-I-902	GO-R5000	2024.02.08	2024.03.07
Wireless temperature transmitter	EF-I-958	DWRP-B (0)	2024.02.08	2024.03.07

REFERENCE STANDARDS OR METHODS

ANSI/NEMA/ ANSLG C78.377-2017	Specifications for the Chromaticity of Solid-State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

Photometric Report

EXTERIOR WASH PRO XL QUAD 6500K – Medium

TEST CONDUCTED AND METHOD

Ambient Condition

The ambient temperature in which measurements are being taken was maintained at 25 ± 2 °C, the air flow around the sample(s) being tested did not affect the performance.

Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within 0.2 percent under load.

Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (9% confidence interval, $k=2$).

Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

10 samples were measured as customer required.

Total Luminous Flux Measurement Method

Total luminous flux was measured by both sphere-spectroradiometer system and goniophotometer.

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the total luminous flux was calculated from these by software automatically.

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the total luminous flux was calculated from the intensity data by software automatically.

1 sample was measured by sphere method, and 1 sample was measured by goniophotometer method.

Correction factor (self-absorption) has been considered when doing measurement.

Luminous Intensity Distribution Measurement Method

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the kinds of graph were generated by software automatically.

1 sample was measured as customer required.