
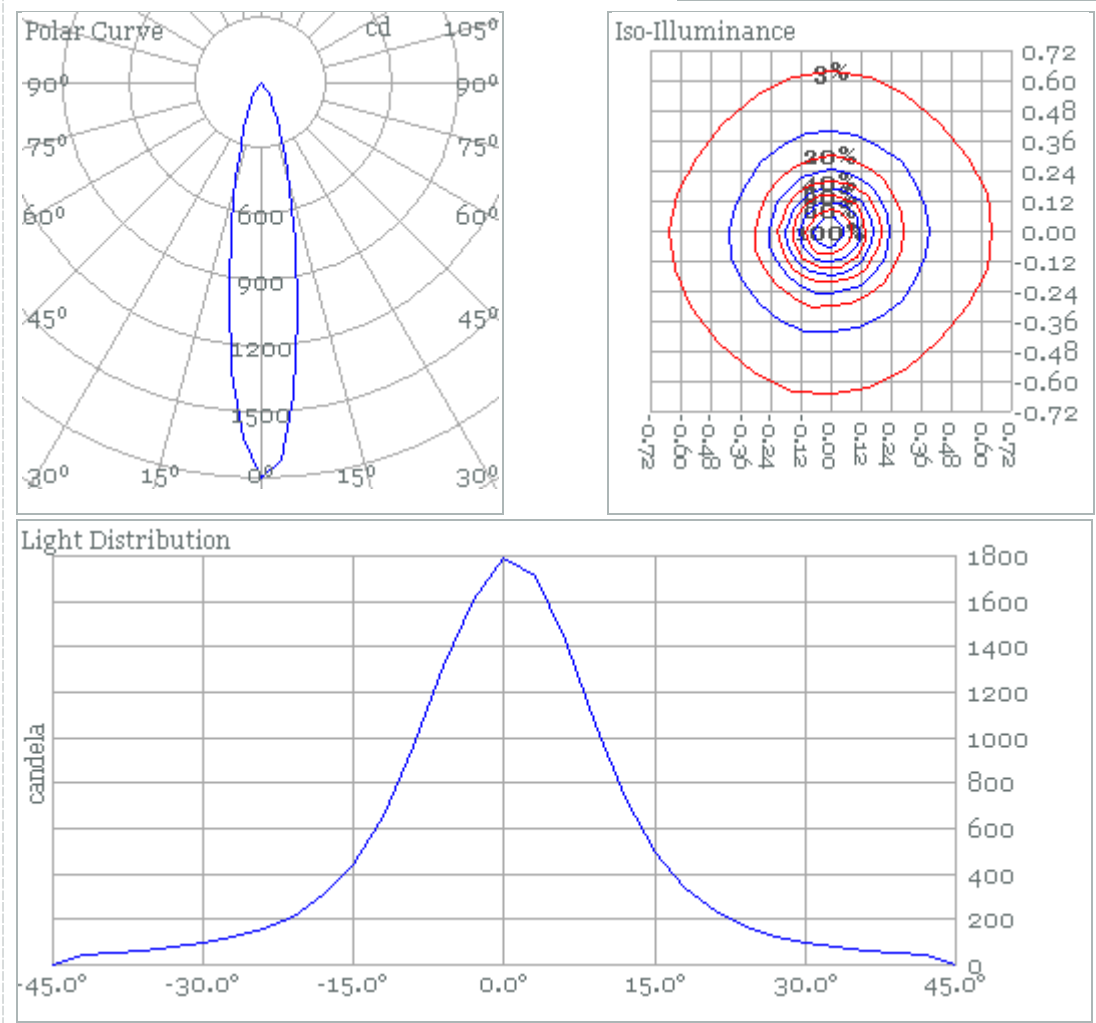



# Tripix 300 and 1200 Photometrics




Tripix 300  
Standard (Without Diffuser) (20°)

m.	Ø 50%	20°	E (lux)	Efficacy
5	1.8		72	15.2 lumens per watt
10	3.5		18	Half-peak diameter
20	7.1		5	0.35 X distance(m)
30	10.6		2	Illuminance
50	17.6		1	1800 / distance <sup>2</sup> (lux)
				Total Output
				360 (lumens)




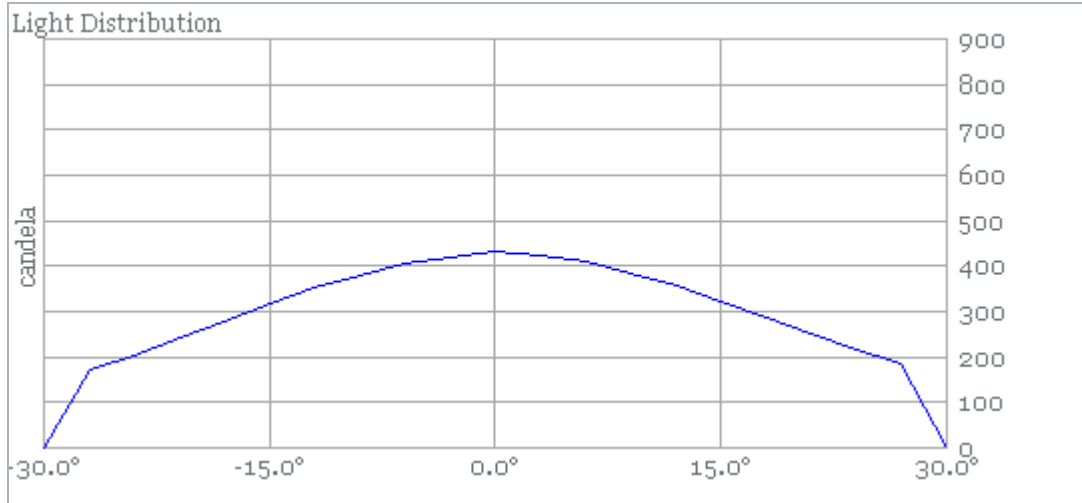
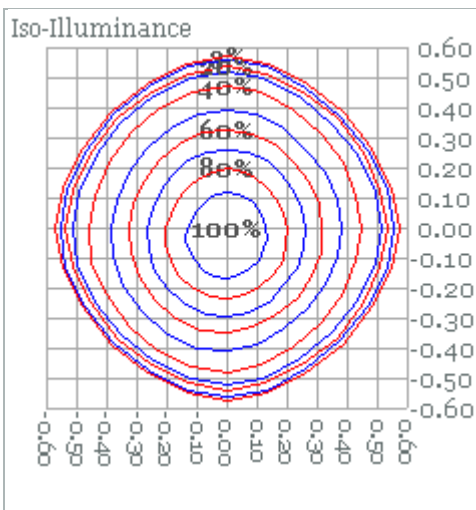
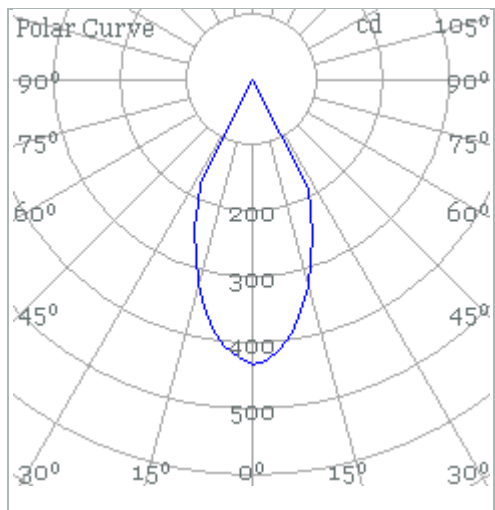
Tripix 300  
Standard (Narrow Diffuser) (24°)

m.	Ø 50%	24°	E (lux)	Efficacy
5	2.1		48	14.9 lumens per watt
10	4.3		12	Half-peak diameter
20	8.5		3	0.43 X distance(m)
30	12.8		1	Illuminance
50	21.3		0	1200 / distance <sup>2</sup> (lux)
				Total Output
				360 (lumens)

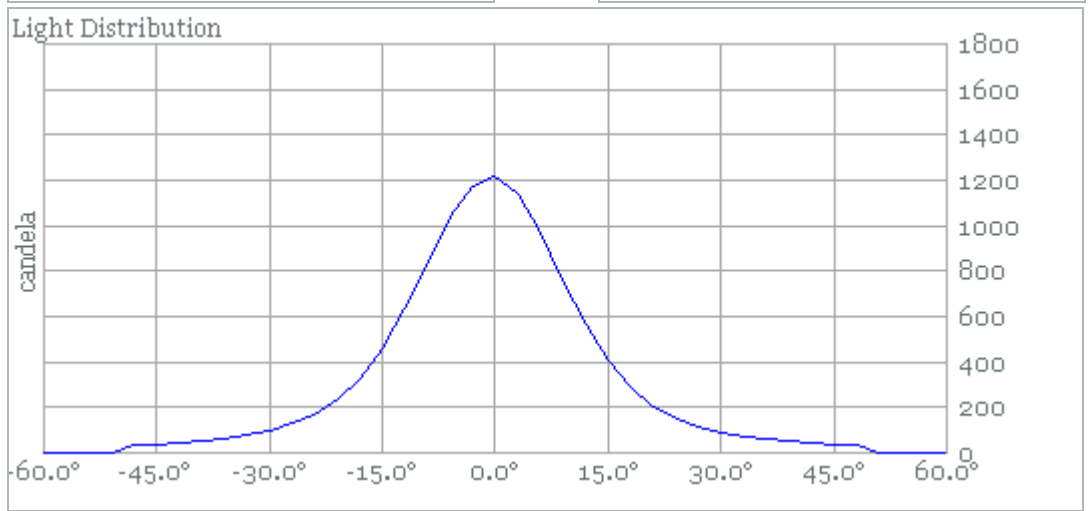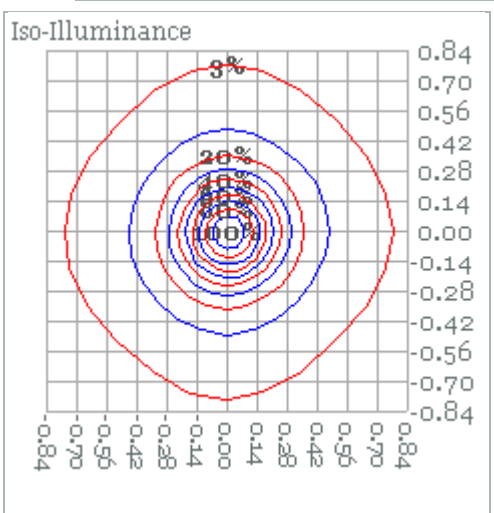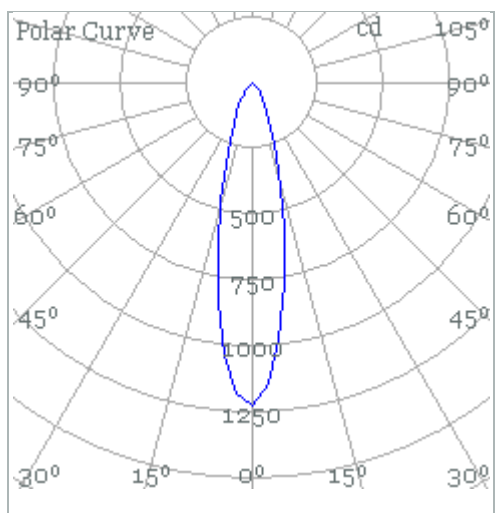





Tripix 300  
Standard (Medium Diffuser) (49°)

m.	Ø 50%	49°	E (lux)	Efficacy
5	4.6		17	8.8 lumens per watt
10	9.1		4	Half-peak diameter
20	18.2		1	0.91 X distance(m)
30	27.3		0	Illuminance
50	45.6		0	430 / distance <sup>2</sup> (lux)
			0	Total Output
				210 (lumens)




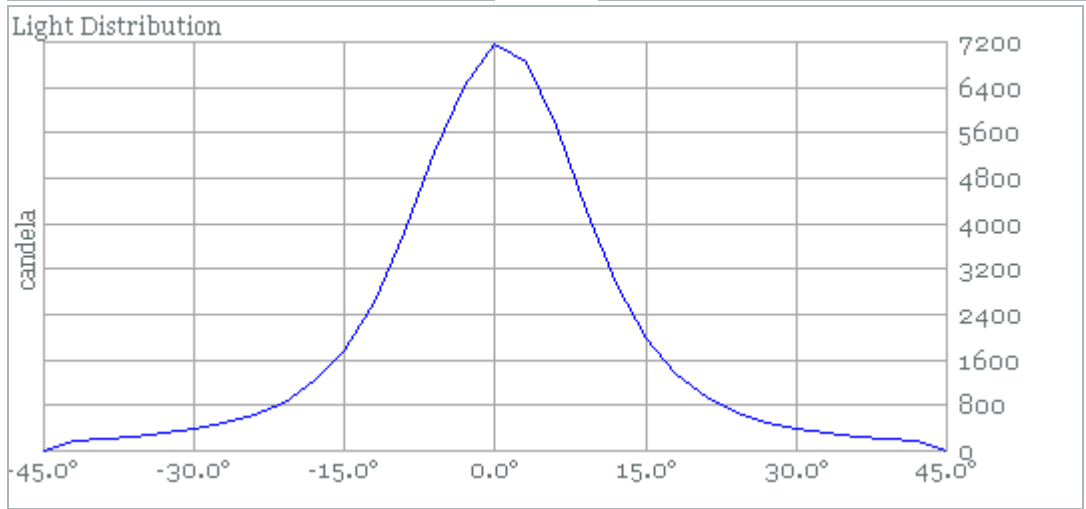
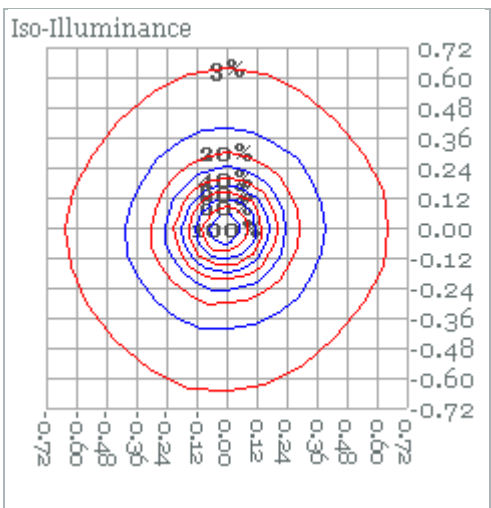
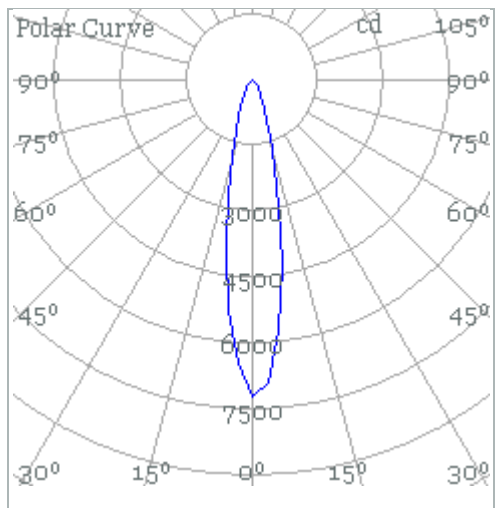
Tripix 300  
Standard (Wide Diffuser) (54°)

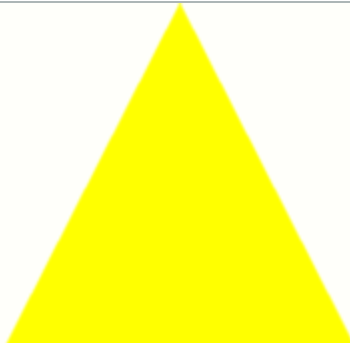m.	Ø 50%	54°	E (lux)	Efficacy
5	5.1		10	11.3 lumens per watt
10	10.2		3	Half-peak diameter
20	20.4		1	1.02 X distance(m)
30	30.6		0	Illuminance
50	51.0		0	260 / distance <sup>2</sup> (lux)
				Total Output
				270 (lumens)

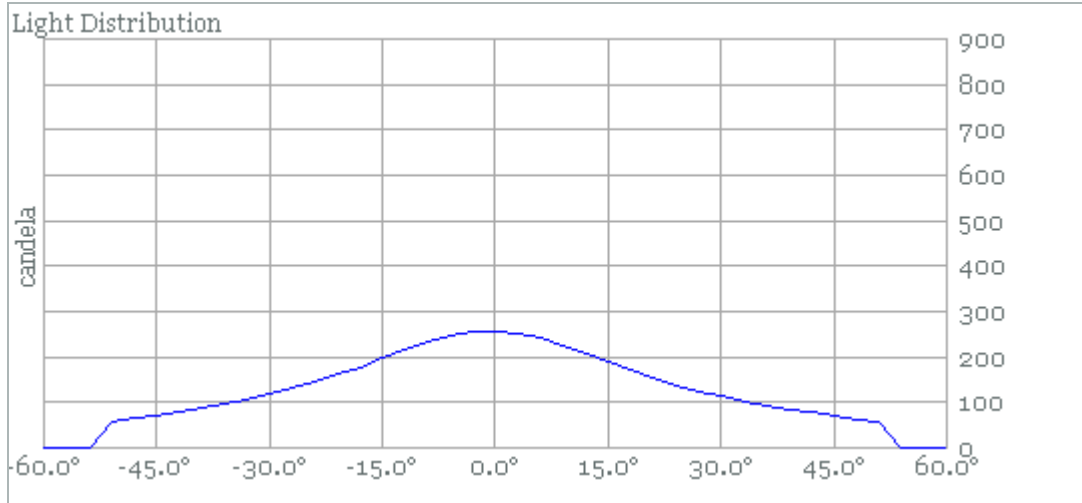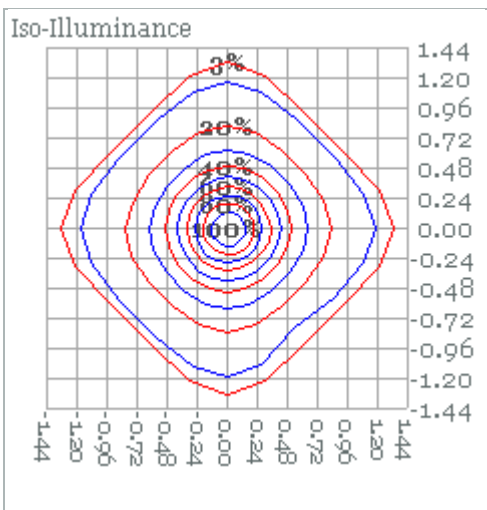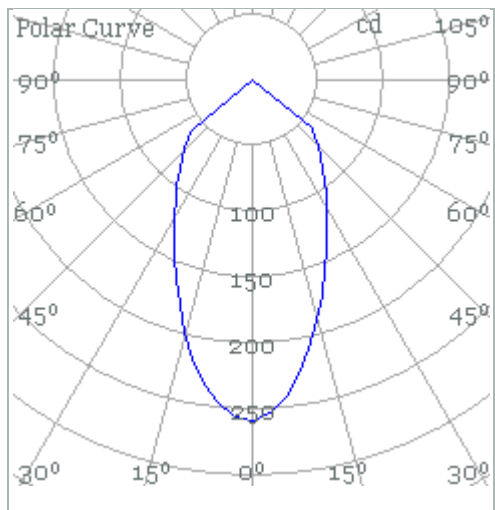


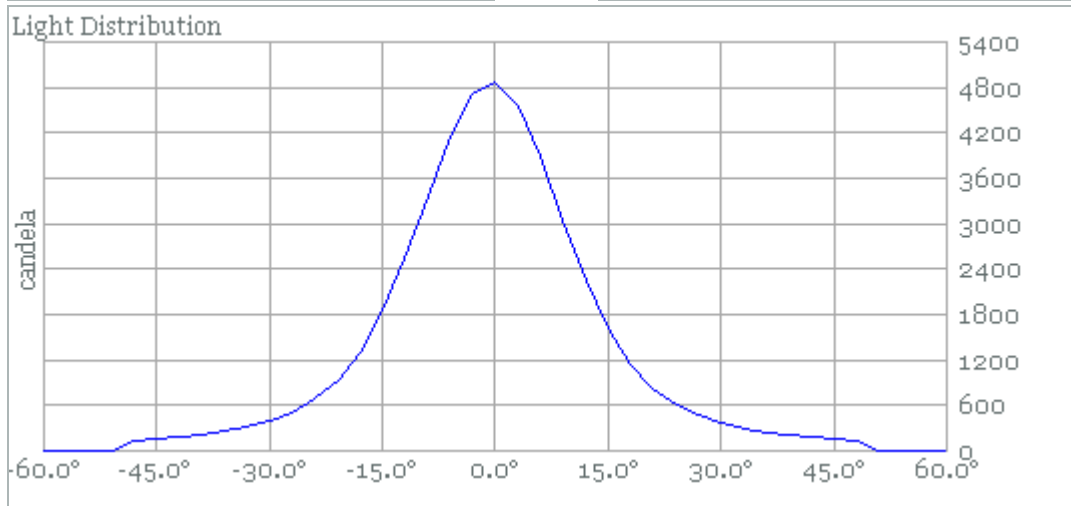
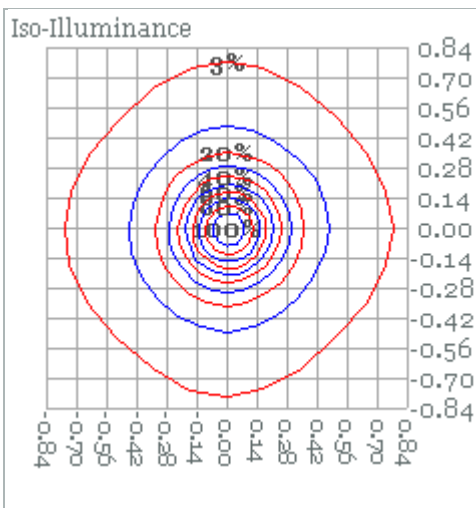
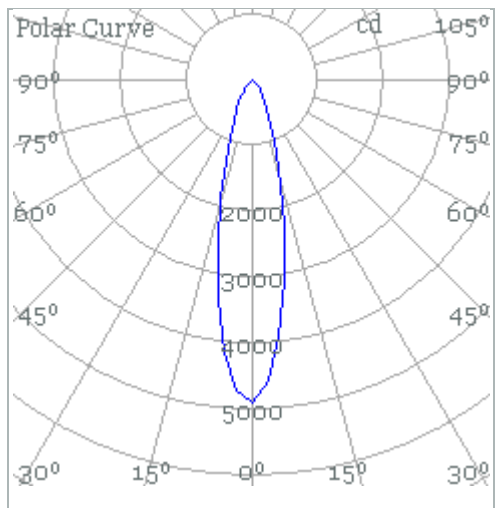
Tripix 1200  
Standard (Without Diffuser) (20°)

m.	Ø 50%	20°	E (lux)	Efficacy
5	1.8		288	17.8 lumens per watt
10	3.5		72	Half-peak diameter
20	7.1		18	0.35 X distance(m)
30	10.6		8	Illuminance
50	17.6		3	7200 / distance <sup>2</sup> (lux)
				Total Output
				1500 (lumens)




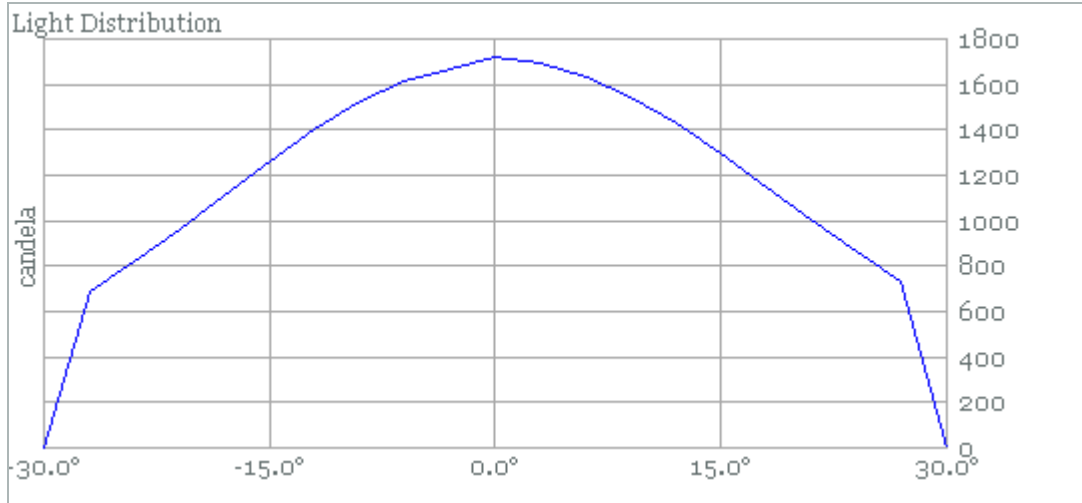
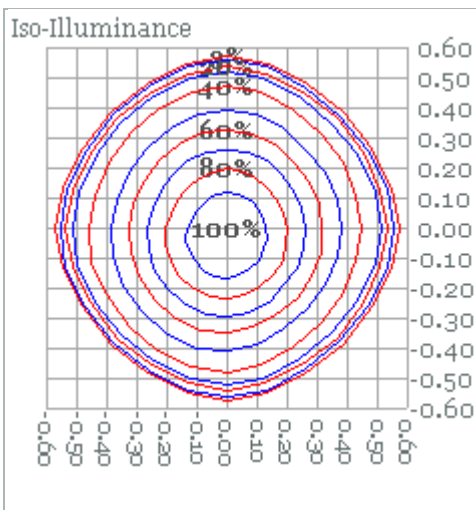
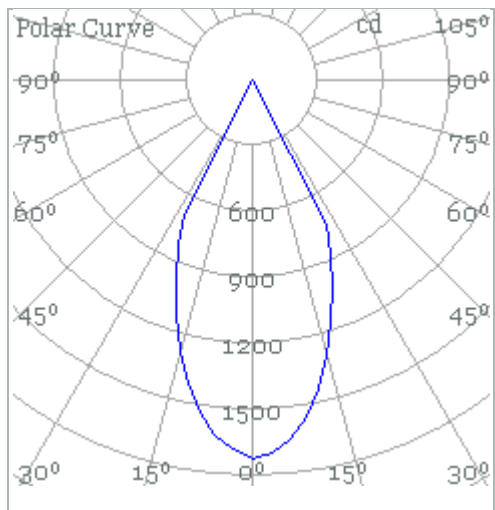
Tripix 1200  
Standard (Narrow Diffuser) (24°)

m.	Ø 50%	24°	E (lux)	Efficacy
5	2.1		196	17.4 lumens per watt
10	4.3		49	Half-peak diameter
20	8.5		12	0.43 X distance(m)
30	12.8		5	Illuminance
50	21.3		2	4900 / distance <sup>2</sup> (lux)
				Total Output
				1400 (lumens)




Tripix 1200  
Standard (Medium Diffuser) (49°)

m.	Ø 50%	49°	E (lux)	Efficacy
5	4.6		68	10.3 lumens per watt
10	9.1		17	Half-peak diameter
20	18.2		4	0.91 X distance(m)
30	27.3		2	Illuminance
50	45.6		1	1700 / distance <sup>2</sup> (lux)
				Total Output
				840 (lumens)



Tripix 1200  
Standard (Wide Diffuser) (54°)

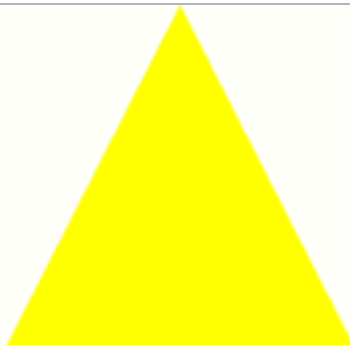m.	Ø 50%	54°	E (lux)	Efficacy
5	5.1		40	13.2 lumens per watt
10	10.2		10	Half-peak diameter
20	20.4		3	1.02 X distance(m)
30	30.6		1	Illuminance
50	51.0		0	1000 / distance <sup>2</sup> (lux)
				Total Output
				1100 (lumens)

